Installation Manual

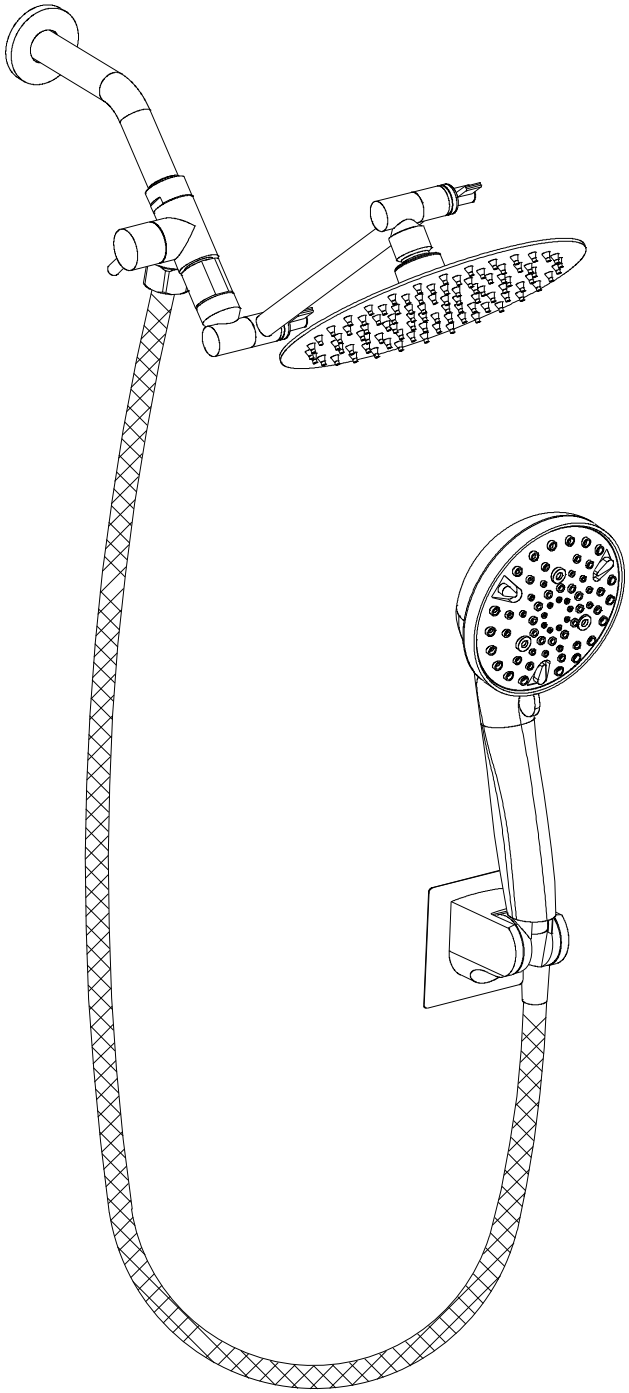

Model#2008

INDEX

1. Installation Preparation & Maintenance(English) P01

2. 93108 Installation(English) P02-03

1.Installation Precautions

1.When you open the product packing, please check the product and accessories at first. If there is any discrepancy, please contact the company or our distributor immediately.

2.The hot and cold water supply pipe of the faucet must be properly connected.
When facing the front of the faucet, the hot water supply is on the left and cold water supply is on the right. Incorrect connection will cause permanent damage to the cartridge.

3.If the accessories to be changed without affecting the use, we will not make a prior notice.

4.The impurities in the water supply pipe must be cleared before installation to avoid blockage.

5.The water pressure of the faucet is 20 PSI -100 PSI(including cold water and hot water pressure)
Applicable water temperature range: 40℉-170℉.

2.Preparation before installation

1. Please read the installation manual carefully before installation.
2. Installation work must be performed by a professional installer.
3.Installation tool.

Tools you may need.

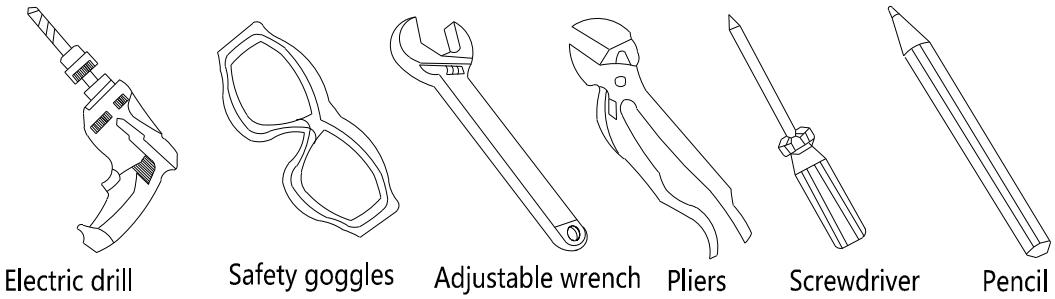

3.Product reparation

If the cartridge is worn out which cause leakage, please turn off the water source. Remove the handle, panel, and decorative cover in sequence, remove the gland with a wrench, then take out the cartridge and copper sleeve.

Repair or replace the new cartridge,then install it again in sequence.

4.Clearance and Maintenance

In order to keep the faucet appearance smooth and good performance, please follow the below steps to clean and maintain the faucet.

1.Clean with water and dry with a soft cotton cloth.
2.Use a mild liquid and a colorless glass cleaner to remove surface dirt and scale, also you can use the cleaner without grinding function.
3.Do not use detergents, polishing tools, abrasive cloth, paper towels or scrapers to clean the faucet.
4.Do not use acid cleaners, insoluble granular detergents, soaps, etc to clean the faucet.

Model: 2008
Installation Instruction 1/2

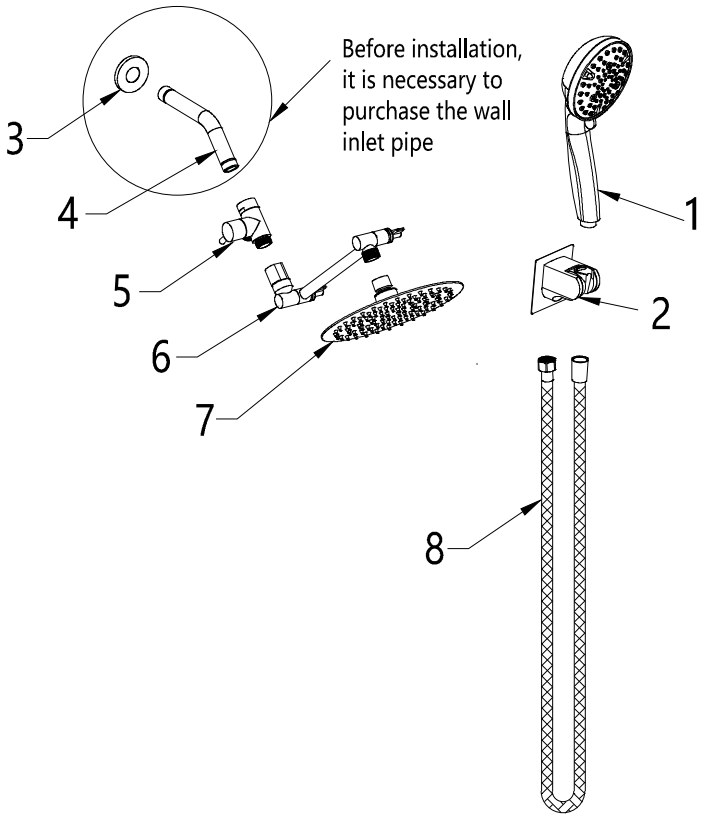

No	Description	QTY
1	Handle Shower	1
2	Shower Holder	1
3	Decorative Cover	1
4	Shower Arm	1
5	Water Distributor	1
6	Swinging Shower Tube	1
7	Shower Head	1
8	Hose	1

Installation Instruction

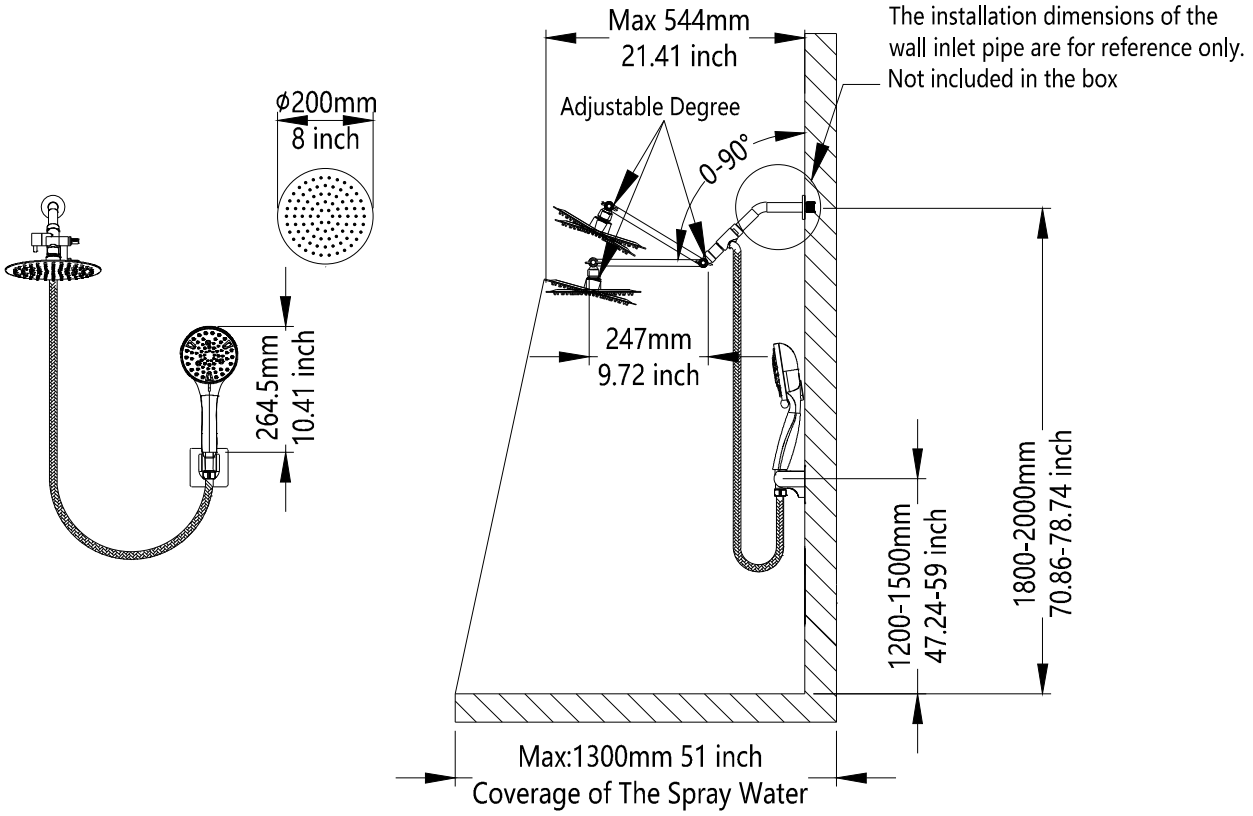

Model: 2008
Installation Instruction 2/2

Installation of wall pipes

1.Wrap the tape around the pipe thread and screw it on the wall hole.
2.Twist the splitter into the water Export pipe thread.

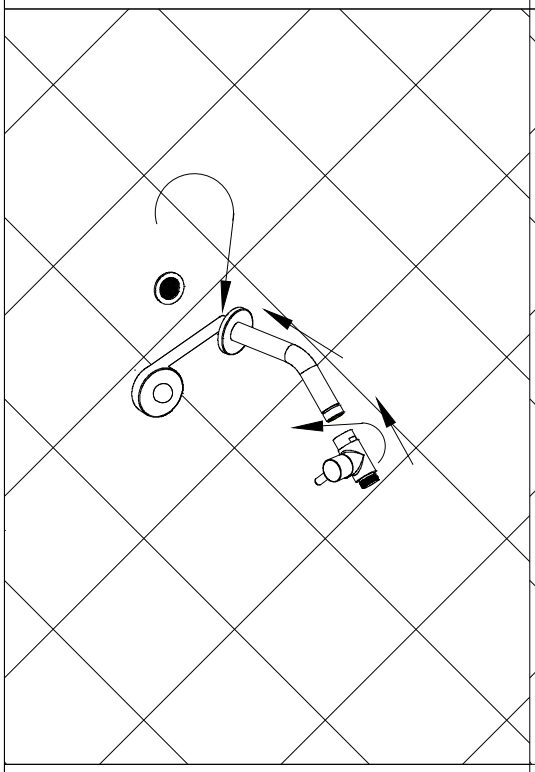

Water outlet pipe connection

2.Connect the splitter to the swing water outlet pipe.

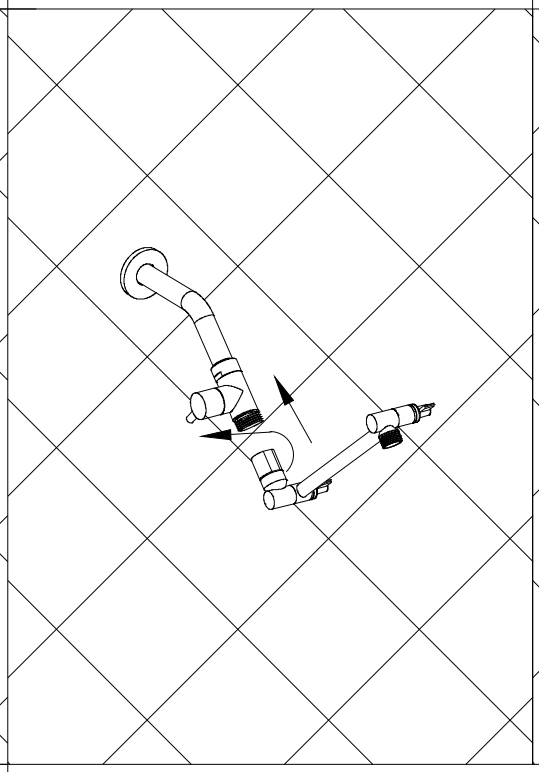

3.Swinging water outlet pipe and top spray connection.

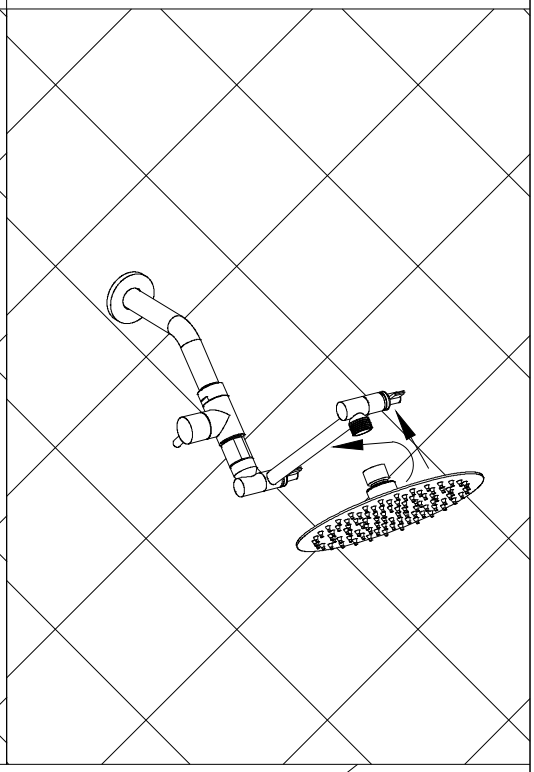

Handle Shower Installation

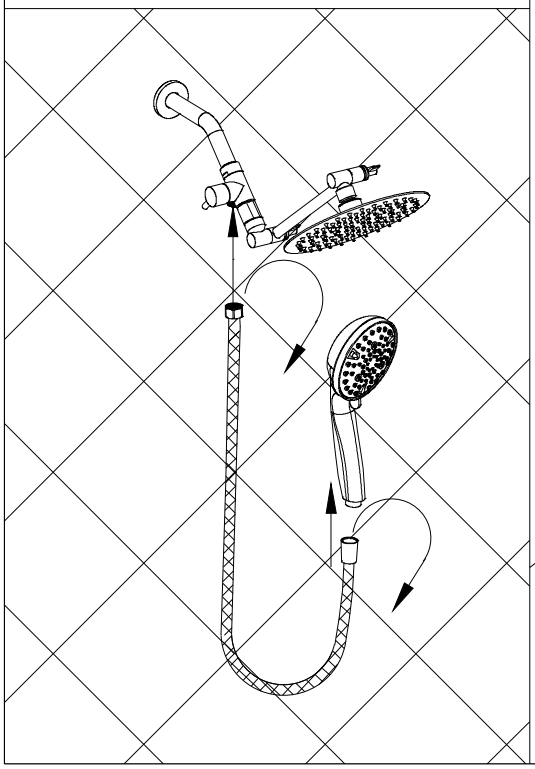

1.Wipe the wall clean, tear off the non-adhesive film of the shower seat, press and stick it on the wall, and use it after 24 hours.

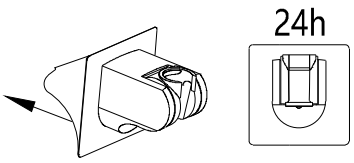

2.Put an expansion sleeve on the hole wall, tighten the screws, and combine the two accessories of the shower seat.



or

1.Use a flat-blade screwdriver to insert into the separation hole, press to separate the two accessories.