

## Lathe™ | K-R31627

Pull-down kitchen sink faucet with three-function sprayhead

### Features

- Three-function pull-down sprayhead with touch control allows you to switch between aerated stream, ring spray and Boost technology
- Ring spray provides powerful jets of water for rinsing your dishes and sink
- Boost technology increases the flow rate by 30% with the press of a button. Use Boost with stream for faster filling or with ring spray for more powerful cleaning
- DockNetik® secure docking system locks sprayhead into place when not in use
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- High-arch swivel spout offers superior clearance for filling pitchers and cleaning
- Single lever handle is simple to use and makes adjusting water temperature easy
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- Box includes: Assembled faucet, supply lines, escutcheon plate



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

- SN Vibrant Polished Nickel
- VS Vibrant Stainless
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- BSN Matte Black & Polished Nickel
- BMB Matte Black with Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
3-27-2026 19:32 - US-CA

## Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372  
ADA  
ICC/ANSI A117.1  
CSA B651

## Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

## Technical Information

All product dimensions are nominal.

### Handle

Handle Style/ Type: Lever

### Spout

Spout Reach: 9-1/16" (230 mm)

### Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

## Valves

Included Valve: Ceramic disc

## Material


- Premium material construction for lasting durability
- KOHLER finishes resist corrosion and tarnishing
- Spot Repel® finish resists fingerprints, smudges, and water spots (Matte Black finish only)
- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use

## Recommended Products/Accessories

K-23723 Faucet cleaner



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
3-27-2026 19:32 - US-CA

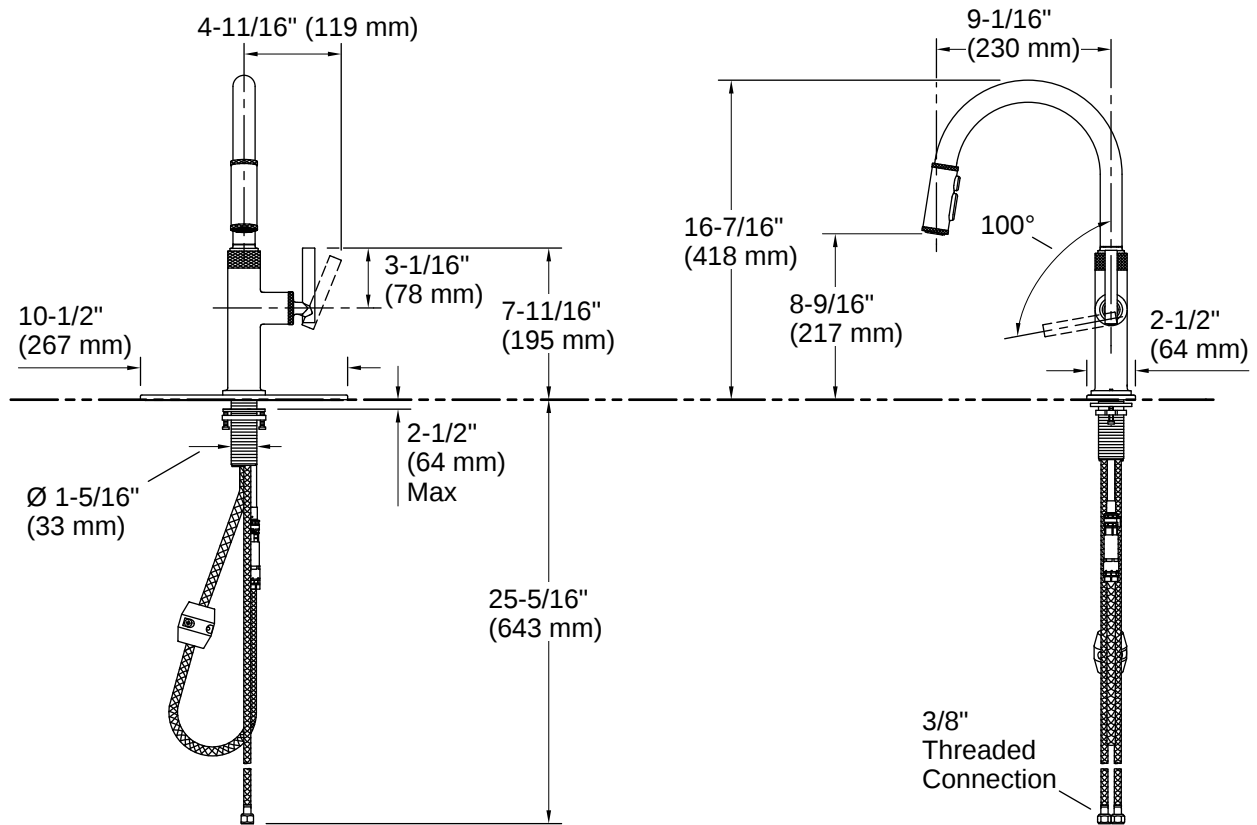

## Installation

- Installs with 1- or 3-hole sink
- Flexible supply lines and quick-connect fittings simplify installation
- Longer shank works with countertops up to 2-1/2" (63.5 mm) thick and is easy to install

## Installation Notes

*Install this product according to the installation instructions.*

ADA compliant for faucet handles only  
 ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

