


MR16

GU5.3 "Twist & Lock" Base



50w*
Equivalent

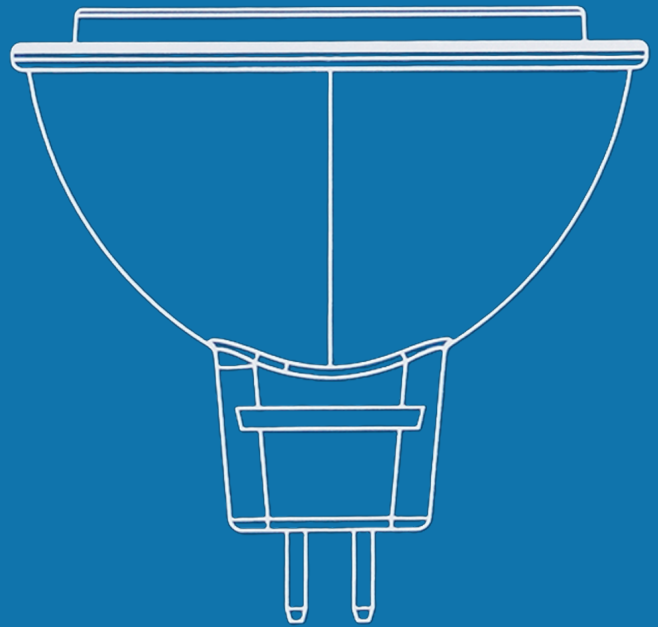

6w
Actual Wattage



550
Lumens



90
Color Rendering Index (CRI)



\$79⁸⁶
Lifetime Savings



40°
Beam Angle



Wet Rated



**Suitable for
Enclosed
Fixtures**



Dimmable

How to install GU5.3 base bulbs:

Turn off the power



Turn off the light switch or flip the corresponding circuit breaker to ensure power is completely disconnected before touching the fixture.

Access the socket



(if applicable) Remove or pull down any outer coverings on the fixture to access the existing bulb. Then, remove the existing bulb by twisting it counter clockwise (to the left) and pulling down.

Align the pins



The base of the GU5.3 bulb has two small pins protruding from it. Align these pins with the matching holes in the socket.

Push & twist



Gently press the bulb up into the socket so the pins sit securely into the holes. Then, twist the bulb clockwise (roughly a quarter to a half-turn) until it stops and locks into place.

Minimum operating temperature: -4F

*Light output similar to 50-watt halogen bulb

**Life based on 3hrs/day

Each bulb saves up to \$79.86 USD in energy costs over the rated life (16,500 hours) of the bulb compared to a 50-watt (1000 hours) halogen bulb. Based on 11c/kWh.

3-YEAR WARRANTY: This bulb has a 3-year warranty. If it fails or you are not satisfied with the performance, return it to the place of purchase for a replacement. This replacement is the sole remedy available and liability for incidental or consequential damage is expressly excluded.



RoHS
Compliant

This bulb meets European Union restrictions on hazardous substances.