



# Ensemble™

60" x 30" Vikrell® bath, right above-floor drain

71171122



## Features

- 18-3/4" (476 mm) apron
- 3" (76 mm) drain-to-floor clearance for above-floor drain installation
- Suitable for tile-down applications
- Integral apron for quick installation

## Material

- Made from solid Vikrell® material for strength, durability, and lasting beauty

## Installation

- Alcove
- Right drain
- Above-floor-drain (AFD) rough-in

## Recommended Products/Accessories

K-23726 Drain treatment  
K-23733 Vikrell® cleaner



ADA

OBC

## Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
ADA  
ICC/ANSI A117.1  
OBC  
HUD, UM Bulletin 73  
IAPMO Certification


## STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description


	0	White
---	---	-------

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

9-30-2024 23:35 - US/CA

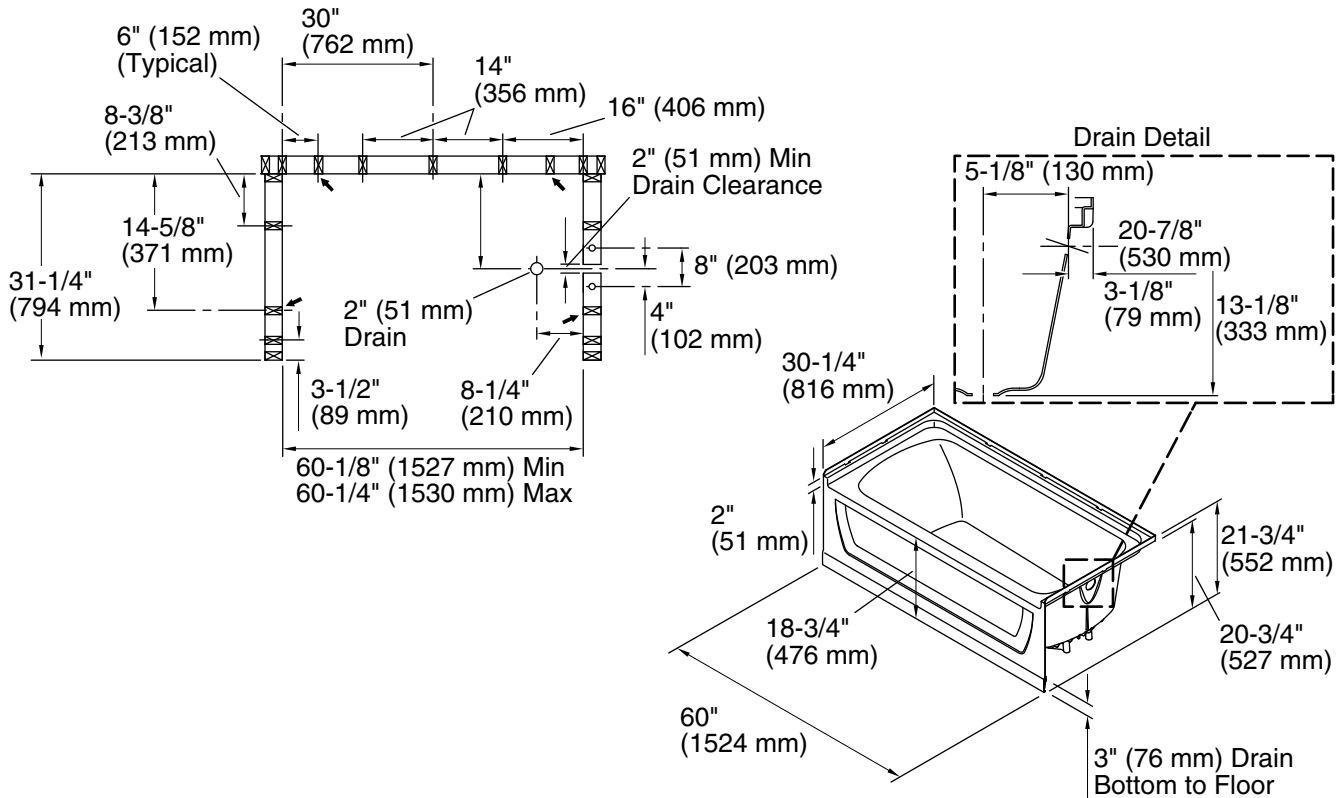

### Technical Information

All product dimensions are nominal.

Drain location:	Right
Basin area, bottom:	45" x 20" (1143 mm x 508 mm)
Basin area, top:	53" x 23" (1346 mm x 584 mm)
Water depth:	11-1/4" (286 mm)
Water capacity:	44 gal (166.6 L)
Minimum flat for door:	2-3/4" (70 mm)
Maximum door width:	57-11/16" (1465 mm)

### Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown. Double studding is recommended for pivot shower door installations.

Felt pad not required for installation.

ADA, OBC compliant when installed to the specific requirements of these regulations.