

INSTALLATION INSTRUCTIONS

*American
Standard*

AXIS 72 x 38 NEO ANGLE SHOWER DOOR MODEL: AM3838N1400 SERIES

Thank you for selecting American Standard – the benchmark of fine quality for over 100 years. To ensure this product is installed properly, please read these instructions carefully before you begin. (Certain installations may require professional help.) Also be sure your installation conforms to local codes.

GENERAL INFORMATION

Please inspect the product immediately upon receipt for transit damage, missing packs/parts or manufacturing fault. Damage reported later cannot be accepted. Please handle the product with care avoiding knocks and shocks, or loading to all sides and edges of the glass.

IMPORTANT: TEMPERED GLASS CANNOT BE DRILLED, CUT OR MODIFIED.

READ THE INSTRUCTIONS CAREFULLY

Familiarize yourself with all the parts as shown in the assembly drawing. The assembly drawing will also provide a helpful reference when relating the location of the various parts and how they are mounted.

Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.

Note: This product is heavy and may require two people to install.

For product quality or installation issues, we would like to hear from you. Please do not hesitate to call American Standard at 1-800-442-1902 and follow the prompts for consumer/shower doors.


AFTER-CARE INSTRUCTIONS

After use, your shower should be cleaned with soap and water. This is particularly important in hard water districts where insoluble lime salts may be deposited and allowed to build up. Cleaners of a gritty or abrasive nature should not be used. Care should be taken to avoid contact with strong chemicals such as organic solvents and strippers.


Glass cleaners can be used, but with caution; if in doubt, contact the manufacturer of the cleaner in question.

Please keep these instructions for aftercare and customer service details.


REQUIRED TOOLS AND MATERIALS




Caulking Gun & Silicone



Drill




1/4" & 1/8" Drill Bits
#2 Square Drive Bit



Utility Knife




Safety Glasses




Regular Screwdriver



Hammer



Tape Measure




Pencil



Phillips Screwdriver




Level

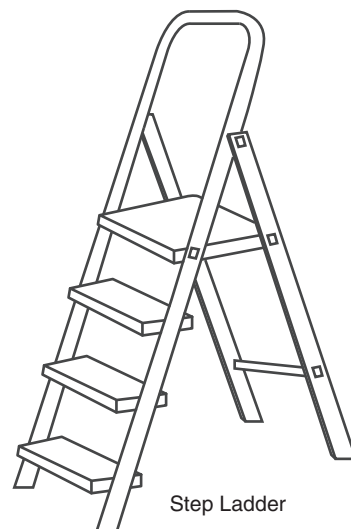

Step Ladder

BOX CONTENTS


2 Wall Posts




2 Corner Posts



1 Installation Instructions



8 Wall Anchors
8 Screws M4x35



16 Screws M4x10
4 Screws M4x12
16 Screw Cover Caps



2 Top Corner Caps
8 Screws M4x12
8 Screw Cover Caps
2 Wall Jamb Caps




2 Door Bottom Gaskets




1 Door Panel



2 Fixed Panels

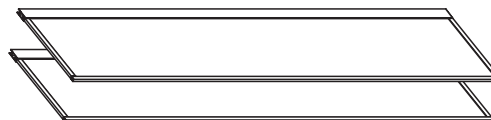

ASSEMBLY DRAWING

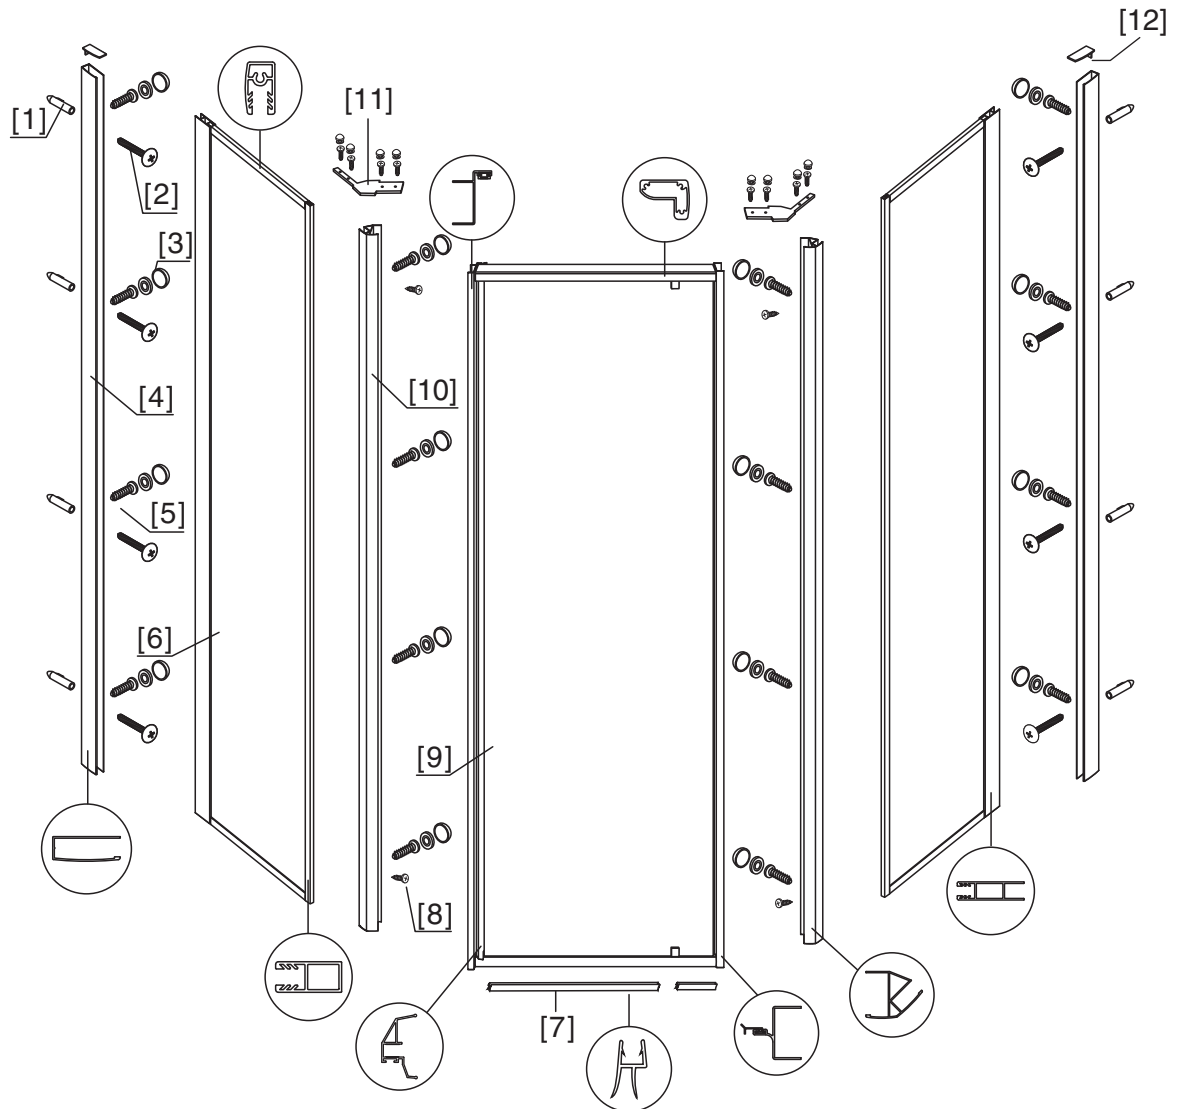

- [1] 8 Wall Anchors/Plugs
- [2] 8 Screws M4x35
- [3] 24 Screw Cover Caps
- [4] 2 Wall Posts
- [5] 16 Screws M4x10
- [6] 2 Fixed Panels

- [7] 2 Door Bottom Gaskets
- [8] 12 Screws M4x12
- [9] 1 Door Panel
- [10] 2 Corner Posts
- [11] 2 Top Corner Caps
- [12] 2 Wall Jamb Caps

INSTALLATION NOTES:

This unit is best installed by two people.

Cover drain with tape prior to installation to prevent the loss of small parts.

Unpack your unit carefully and inspect for freight damage. Lay out and identify all parts using instruction sheet as a reference. Before discarding the carton check to see that no small hardware parts have fallen to the bottom of the box. If any parts are damaged or missing refer to the description noted in the instructions when inquiring about replacements.

Handle the glass panels carefully and protect the edges. Although tempered glass is very resistant to breakage the glass can still break if unequal pressure is applied during installation and the sharp corners of the panel can damage tile and flooring surface.



Be sure to wear safety glasses whenever drilling or cutting. When drilling holes in ceramic tile or marble use a center punch and hammer to carefully break the glazed surface. This will prevent skidding when drilling.

NOTE: TEMPERED GLASS CANNOT BE DRILLED, CUT OR MODIFIED.

1

ATTACHING WALL POSTS



1. With the shower base and walls installed, use a level to mark vertical lines at the outside edge of the shower base as shown.
2. Position a Wall Post [4] 1" (25 mm) from the line. Ensure that it is plumb and mark the location of the mounting holes on the wall. Remove the post and using a 1/8" drill bit drill holes where marked on the wall. Ensure that the holes on the side of the wall post face the inside of the shower enclosure. Fasten the wall post to the wall using the M4x35 Flat Screws [2].
Note - if not using the Axis Shower Wall (Model 3838CW) then the Wall Anchors [1] must used.
3. Repeat above for the second wall post.

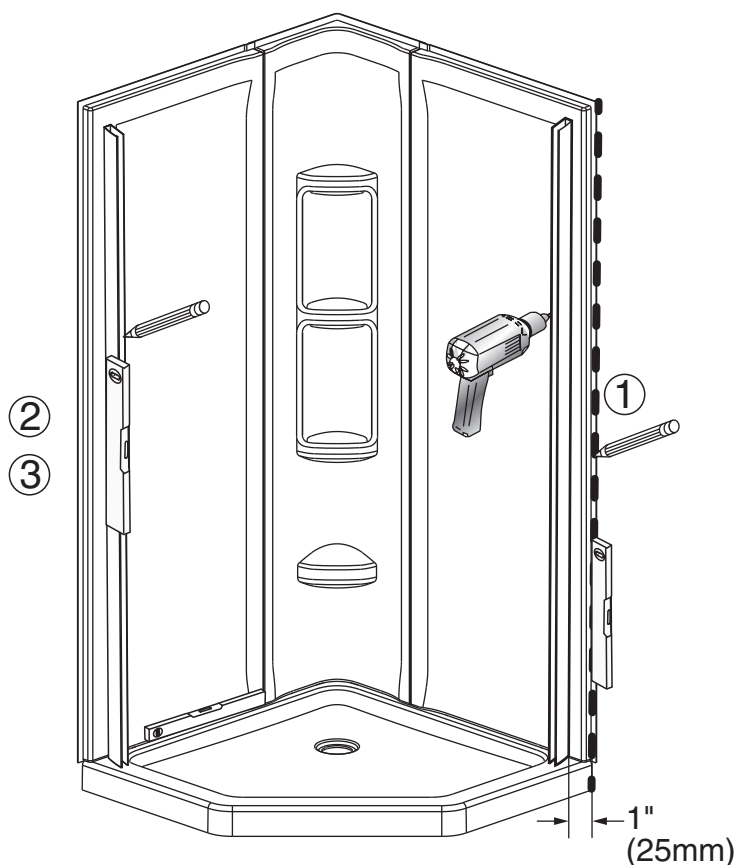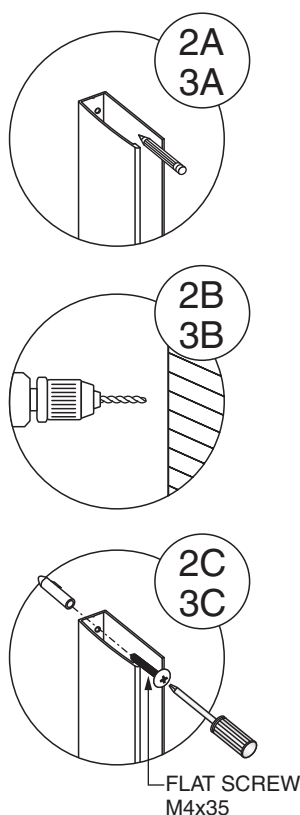

2

ASSEMBLING FIXED PANELS AND CORNER POSTS



1. Insert the Fixed Panels [6] into the wall posts.
2. Attach the Corner Posts [10] to the fixed panels with the hole facing the inside of the enclosure and secure using the M4x12 screws [8].

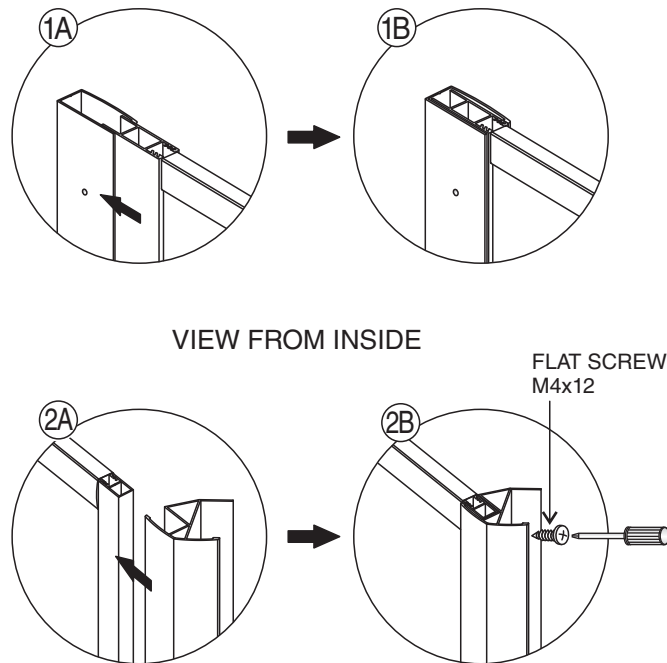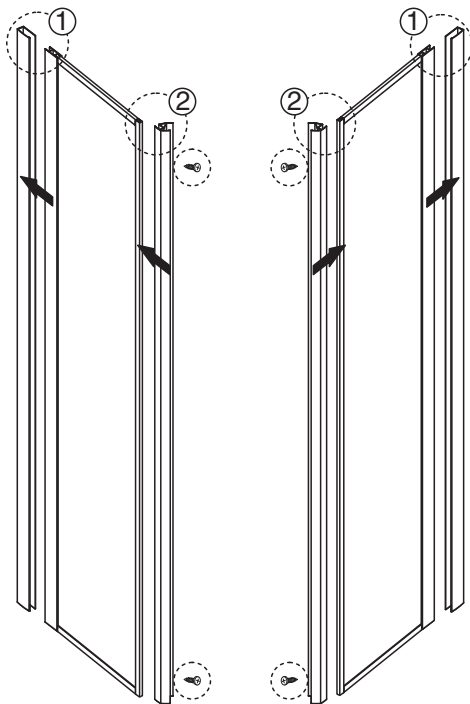

3

ASSEMBLING DOOR PANEL



1. Insert the Door Panel [9] into the corner posts.
2. Using a 1/8" drill bit, drill holes in the door panel using the holes in the corner posts as location guides. Secure the corner posts to the door panel using the M4x10 screws [5] and washers. Place Screw Covers Caps [3] over the screw heads.

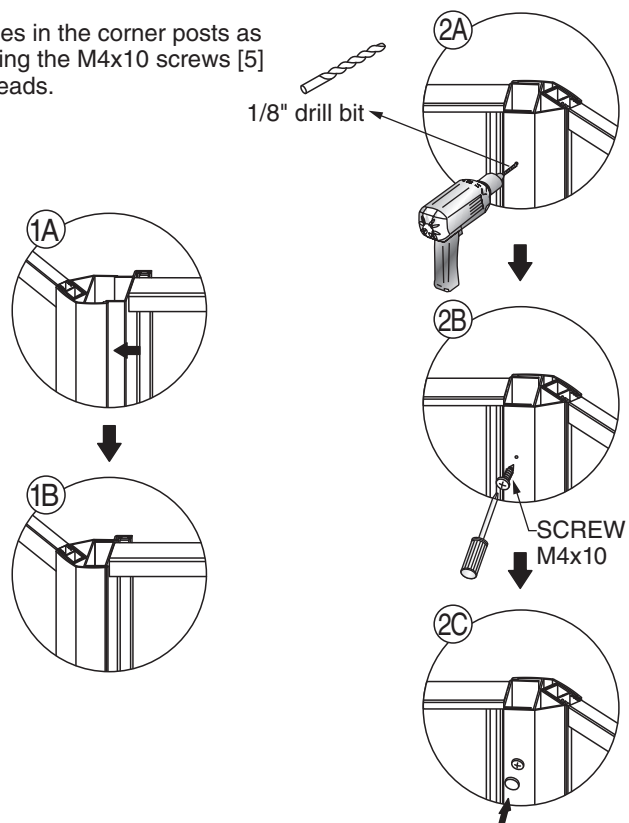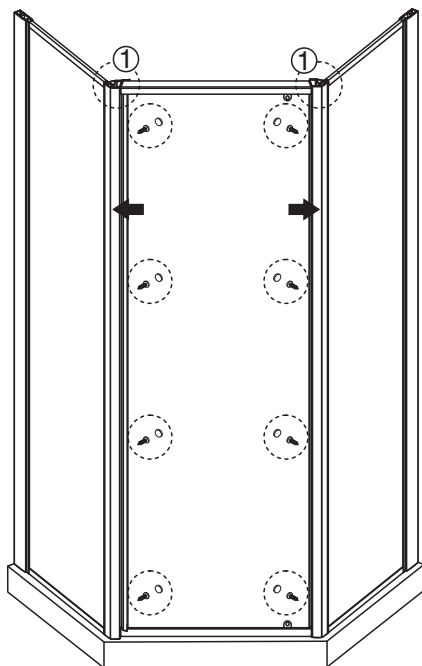

4

INSTALLING WATER DEFLECTORS/GASKETS

1. Install the Door Bottom Gaskets [7] on the bottom of the door as shown. Be sure that the gaskets extend from the door pivot to the end of the door. Some trimming of the gaskets may be required.

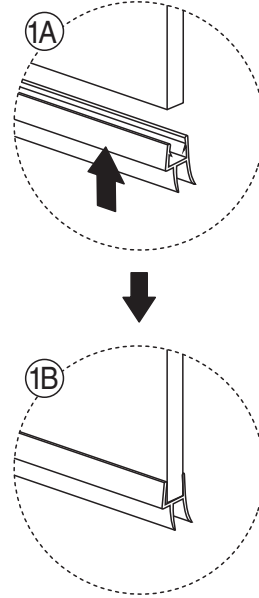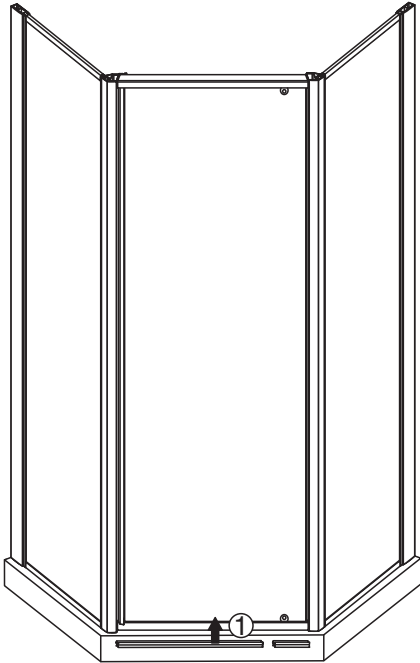



5



NOTE: Ensure that the fixed panels are plumb. Adjust the enclosure to be square and plumb. The enclosure should be adjusted to square the door and ensure it opens smoothly.

FIXING THE ASSEMBLY TO THE WALL POSTS

1. Using a 1/8" drill bit, drill holes in the fixed panels using the holes in the wall posts as location guides. Secure the wall posts to the door panel using the M4x10 screws and washers. Place Screw Covers Caps over the screw heads.



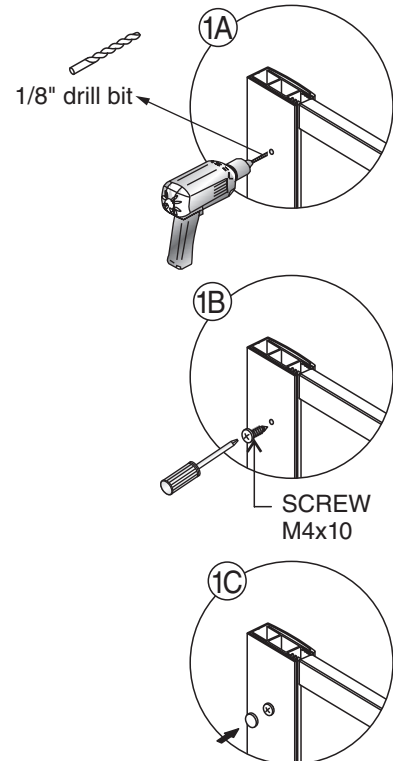
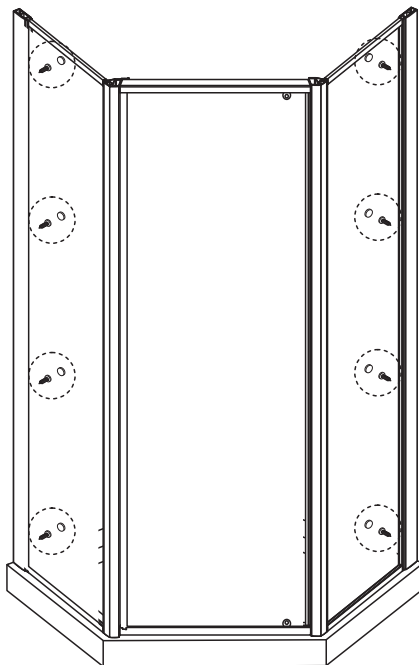


VIEW FROM INSIDE

6

INSTALLING TOP CORNER CAPS


1. A - C Place the Top Corner Caps [11] on the top of the corner posts. Using a Step Ladder will be helpful for this step. Mark the hole locations and drill holes in the tops of the door and fixed panels using a 1/8" drill bit as shown. Secure the Top Corner Caps using the M4x12 Screws and Washers. Place Screw Cover Caps over the screw heads.

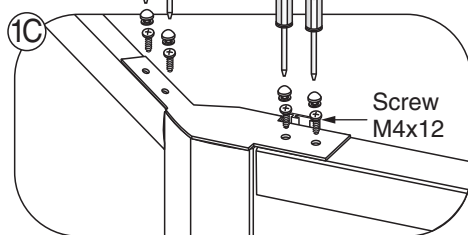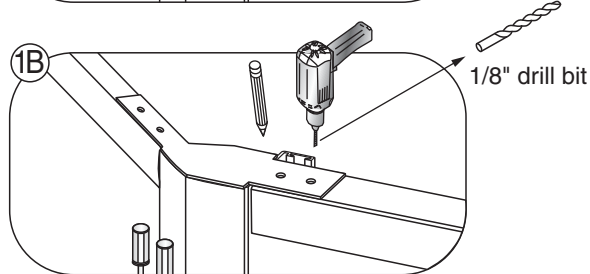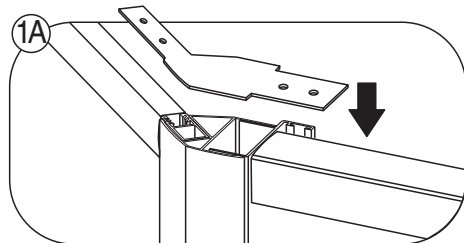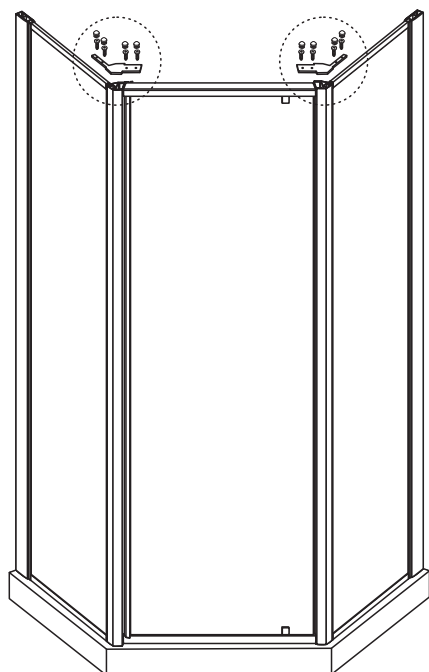

7

APPLYING SILICONE and INSTALLING PROFILE COVERS

1. Install the Profile Covers [12] on the top of the Wall Posts.



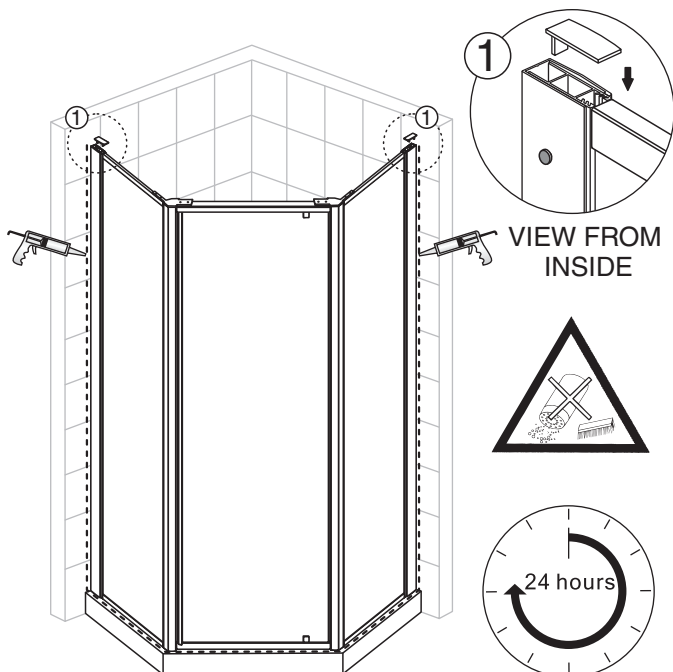


**NOTE: ALLOW
24 HOURS FOR
SILICONE TO DRY
BEFORE USE.**

CHANGING SIDES OF DOOR OPENING

FULL LENGTH
HANDLE

If the door is to be assembled so the door opens on the right side, rotate the door panel as shown below.

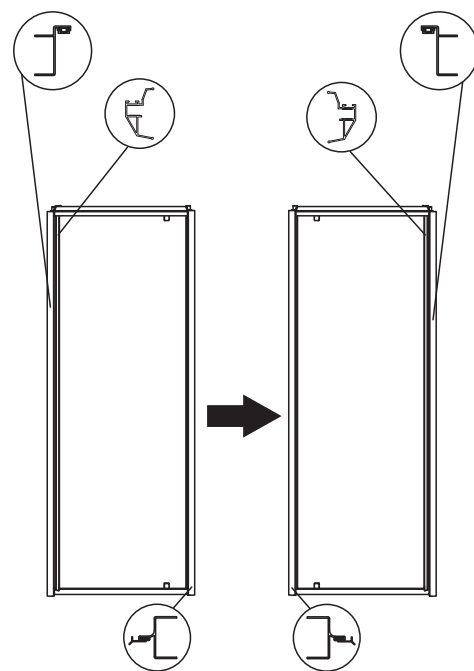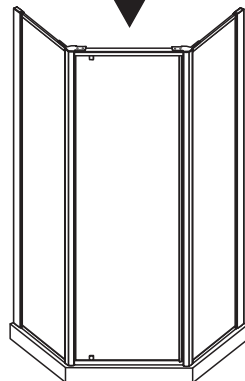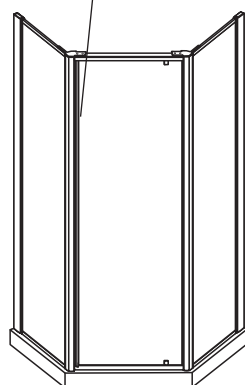

MAINTENANCE:

Two primary materials are used to manufacture your new American Standard shower enclosure: tempered glass and anodized aluminum. To assure a long lasting finish on the enclosure, wipe it down with a towel after each use.

For occasional, more concentrated cleaning efforts **Lysol Non-Abrasive Bathroom Cleaner** works extremely well. Be sure that any over spray falling on the aluminum frame is rinsed thoroughly and dried. Many over-the-counter cleaners, if applied to the aluminum and left on, will harm the metal finish and cause permanent damage even though their directions indicate safe use on shower doors. Never use a scouring agent to clean the aluminum.

AS AMERICA, INC. LIMITED LIFETIME WARRANTY FOR SHOWER DOORS

AS America, Inc. ("American Standard") warrants to the original consumer purchaser that it will, at its sole option, repair or replace this product or any part of this product, if it confirms that the product is defective in materials or workmanship under normal use and maintenance for the lifetime of this product.

This warranty does not apply to commercial installations. Commercial installations shall have a limited warranty of 3 year(s).

This limited warranty DOES NOT COVER the following:

- 1.. Defects or damage arising from shipping, installation, alterations, accidents, abuse, misuse, lack of proper maintenance and use of other than genuine American Standard replacement parts, in all cases whether caused by a plumbing contractor, service company, the owner or any other person.
2. Deterioration through normal wear and tear.
3. HARD WATER DAMAGE, OR DAMAGES RESULTING FROM ABUSE OR MISUSE OR FROM FAILURE TO INSTALL OR MAINTAIN THIS PLUMBING PRODUCT IN ACCORDANCE WITH THE WRITTEN INSTRUCTIONS FURNISHED BY AS AMERICA, INC.
4. USE OF CLEANING PRODUCTS CONTAINING CALCIUM HYPO CHLORITE (CHLORINE), SCOURING POWDERS OR PADS SHALL NOT BE COVERED.
5. THE USE OF SCENTED CANDLES IN CLOSE PROXIMITY WITH THIS PRODUCT CAN RESULT IN PERMANENT STAINING OF THE FINISH.
6. Expense of normal maintenance.
7. All costs of removal, transportation, labor, reinstallation or other costs including postage and/or shipping costs to obtain warranty service shall be paid by the consumer.
8. ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, ALL OF WHICH ARE HEREBY EXPRESSLY DISCLAIMED. ANY IMPLIED WARRANTIES, INCLUDING THOSE OF MERCHANTABILITY OR FITNESS FOR PURPOSE INTENDED ARE SPECIFICALLY EXCLUDED. (Some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so these limitations and exclusions may not apply to you.)
9. Responsibility for compliance with local code requirements ARE EXCLUDED FROM THIS WARRANTY. (Since local code requirements vary greatly distributors, dealers, installation contractors and users of plumbing products should determine whether there are any code restrictions on the installation or use of a specific product.)

This limited warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or from province to province, in which case this limited warranty does not affect such statutory rights.

For service under this warranty, it is suggested that a claim be made through the contractor or dealer from or through whom the product was purchased, or that a service request (including a description of the product model and of the defect) be sent to the following with proof of purchase or original receipt:

In the United States:

American Standard Brands
P.O. Box 6820
Piscataway, New Jersey 08855
Attention: Director of Consumer Affairs

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902
www.americanstandard.com

In Canada:

AS Canada ULC
5900 Avebury Rd.
Mississauga, Ontario
Canada L5R 3M3


Toll Free: (800) 387-0369
www.americanstandard.ca

In Mexico:

American Standard B&K Mexico
S. de R.L. de C.V.
Via Morelos #330
Col. Santa Clara
Ecatepec 55540 Edo. Mexico
Toll Free: 01-800-839-1200
www.americanstandard.com.mx

AXIS 72" x 38"
NEO ANGLE SHOWER DOOR

MODEL NUMBER:
AM3838N1400 SERIES

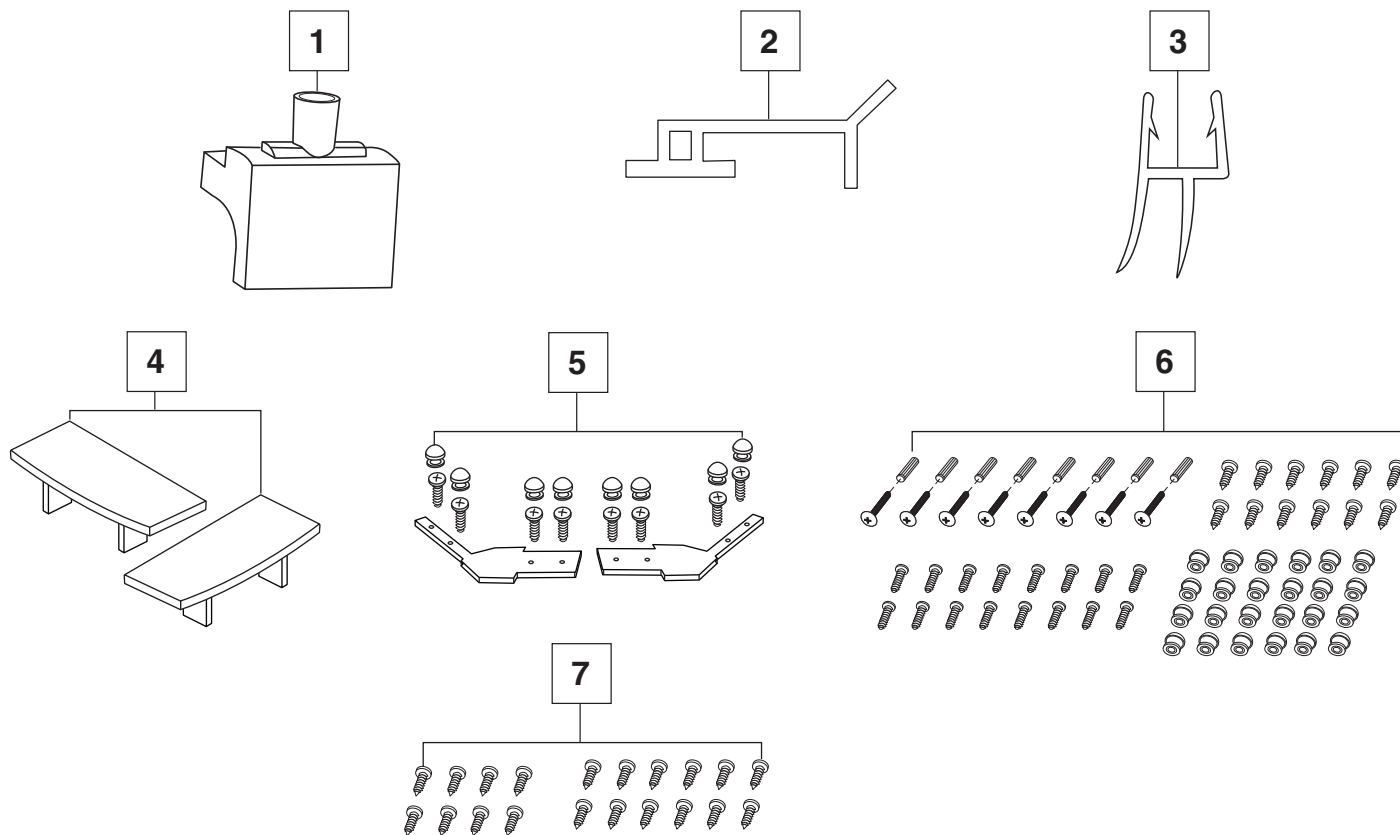

NO.	DESCRIPTION	PART #	FINISH	QTY/UNIT
1	Pivot with Screw— 2 pieces	710366-101.0200A	White	1 Set
2	Door Panel Side Gasket	710367-101.0070A	N/A	1 Piece
3	Door Bottom Gasket 502 mm, 53 mm — 1 for each	710368-101.0070A	N/A	1 Set
4	Wall Jamb Cap — 1 Left, 1 Right	710369-101.0200A	White	1 Set
5	Top Corner Cap with Screw — 2 pieces	710370-101.0200A	White	1 Set
6	8X Wall Plug, 8X Screw 4x35, 12X Screw 4x12, 16X Screw 4x10, 24X Screw Cap	710371-101.0200A	White	1 Set
7	12X Screw 4x25, 8X Screw 4x35	710372-101.0070A	N/A	1 Set