


# STAINLESS STEEL BRAIDED FLEXIBLE SUPPLY LINE

3/8" Compression x 1/2" FIP



*Peace of Mind for the Professional Plumber*

## TECHNICAL DATA

**DESCRIPTION:** Stainless Steel Braided Flexible Supply Line - 3/8" Comp x 1/2" FIP

**CONSTRUCTION:**

**Braiding** - 304 Stainless Steel

**Internal Hose** - Polyvinyl Chloride (PVC)

**Metal Nuts** - Nickel Plated Brass Alloy

**Ferrule** - Steel

**Washer** - Rubber

**TECHNICAL SPECIFICATIONS:**

**Working Pressure** - 125 PSI

**Burst Pressure** - 1500 PSI

**Working Temperature** - 40° F to 150° F


**Max Temperature** - 180° F

Connectors are lead free and contain a weighted average lead content of ≤ 0.25%.

| PART#  | Dimension<br>"A" | Inner/Master | Pack | UPC          |
|--------|------------------|--------------|------|--------------|
| 48030  | 9"               | 25/100       | Bulk | 091712480303 |
| 48003  | 12"              | 25/100       | Bulk | 091712211945 |
| 48004  | 16"              | 25/100       | Bulk | 091712480044 |
| 48005N | 20"              | 25/100       | Bulk | 091712480051 |
| 48006  | 24"              | 25/100       | Bulk | 091712480068 |
| 48007  | 30"              | 25/100       | Bulk | 091712480075 |
| 48008  | 36"              | 25/100       | Bulk | 091712480082 |
| 48301  | 48"              | 25/50        | Bulk | 091712483014 |
| 48302  | 60"              | 25/50        | Bulk | 091712483021 |
| 48303  | 72"              | -/50         | Bulk | 091712483038 |

**MADE IN:** Eastman Factory in China

## ROUGH IN DRAWING

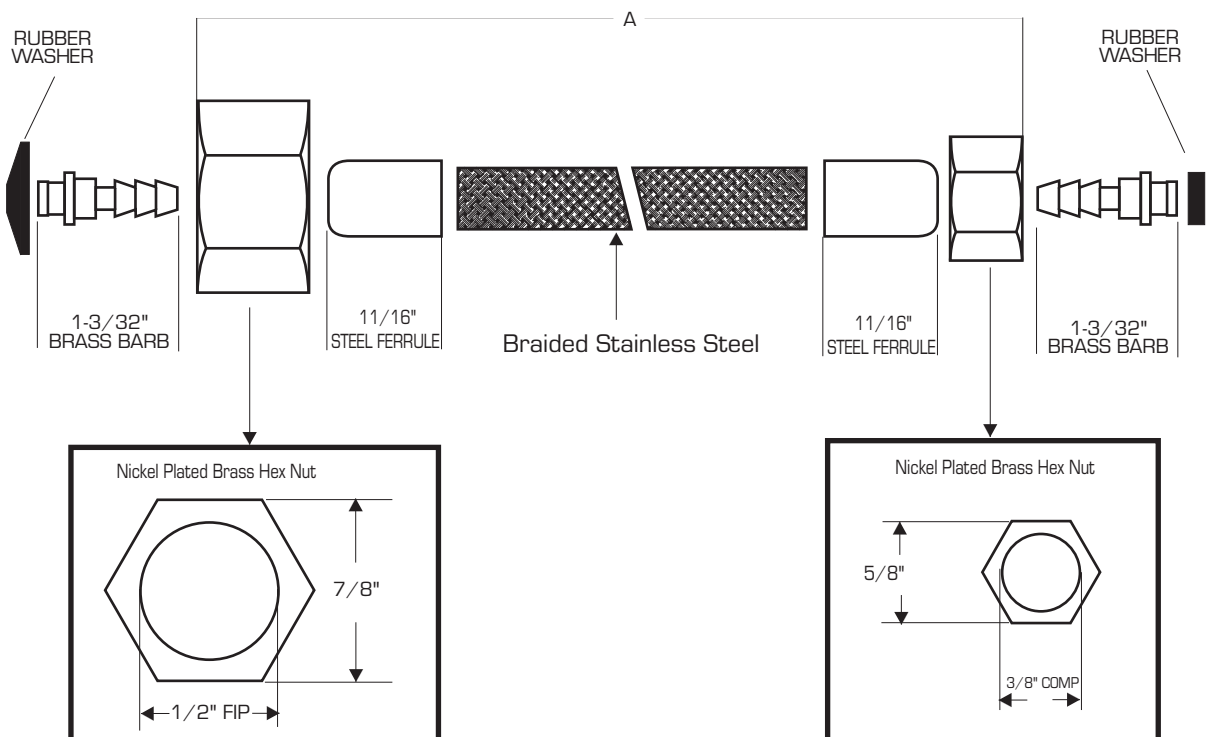

**ALL DIMENSIONS SHOWN ARE NOMINAL**

Meets requirements for NSF-61



Approved



Complies with Low Lead Plumbing Laws