

Wall-mount single-handle bathroom sink faucet, 1.2

Tone[™]

gpm **K-26438-4**

Features

- A single handle controls both on/off activation and temperature setting
- 7-11/16" (195 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Coordinates with other products in the Tone collection
- This product can help a building earn Water Efficiency points in LEED[®] Green Building Rating System

Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Installation

Wall-mount

Recommended Products/Accessories

K-27425 18" towel bar K-27426 24" towel bar K-27427 Robe hook K-27428 Towel ring K-27429 Pivoting toilet paper holder

Optional Products/Accessories

K-7107 Decorative Drain K-7108 Decorative Drain K-7114 Pop-Up Drain K-7114-A Pop-Up Drain K-7127 Drain K-7127 A Drain K-7129 Drain K-7129-A Bathroom sink grid drain with overflow K-33151 Clicker drain without overflow K-25322 Clicker drain with overflow







Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

СР	Polished Chrome
BN	Vibrant® Brushed Nickel
BL	Matte Black
2MB	Vibrant® Brushed Moderne
	Brass Matte Black with Moderne



KOHLER, Faucets

Tone[™] Wall-mount single-handle bathroom sink faucet, 1.2 gpm K-26438-4

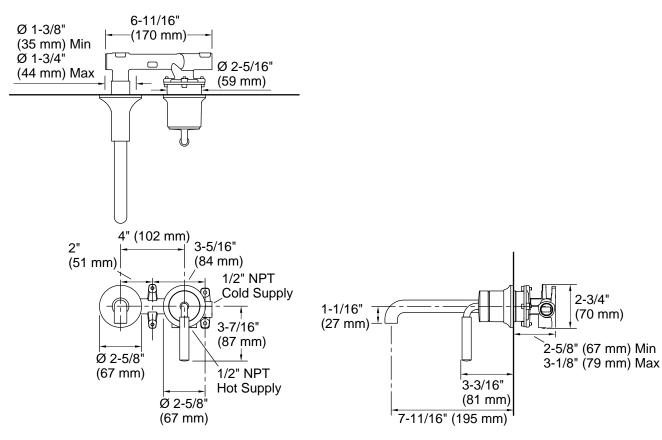

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Drain included:

No

Spout:

Spout reach: 8-3/16" (208 mm)

Handshower:

Rated maximum flow:

0 gal/min (0 l/min)

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

