

Project		Catalog #		Type	
Prepared by		Notes		Date	



Metalux

HBRLD

Round LED High Bay Luminaire

Typical Applications

Light Commercial • Gymnasiums • Industrial • Manufacturing • Warehouse

Interactive Menu

- Order Information page 2
- Product Warranty

Product Certification




Product Features




Top Product Features

- 200W 26,000 lumen output for >30ft mounting heights
- Up to 600W equivalent replacement
- Durable die cast construction with polycarbonate lens
- S-Hook, hardware and 6ft supply cord included
- L70 at 60,000 hrs or 19 years

Dimensional and Mounting Details

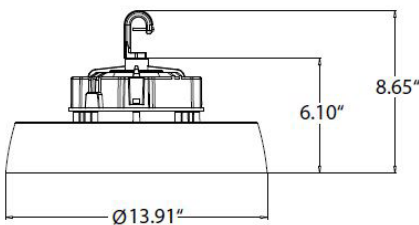

Scale

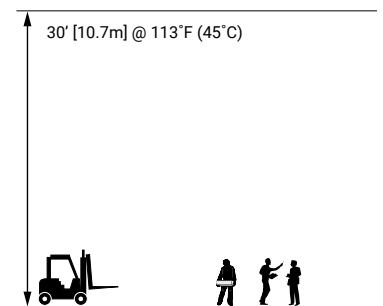

Product Information

Catalog Number	Lumen	Wattage	UPC	I2of5	Unit Weight	Pallet Quantity
HBRLD2440R	26,000	200	080083910755	10080083910752	11.7	20

Product Specifications

Construction

- Round die cast aluminum heat sink
- IP65 rated driver enclosure

Electrical

- 120-277V electronic driver, Class A
- Standard 0-10V dimming to 10%
- 0-10V dimming uses low-voltage grey and purple wire leads
- 6-foot long (nominal) dimming and power cords included for easy installation

Optics

- UV stabilized polycarbonate clear lens covers LEDs
- Wide, large area coverage and distribution

LED and Light Engine

- 4000K CCT and minimum 80 CRI
- L70 at 60,000+ rated life-hours (TM-21), or 19 years at 8.5 hrs/day.
- LED modules comply with IESNA LM-79 and LM-80 standards

Mounting

- Includes S-hook mounting hardware with fastener
- S-hook attaches to fixture via ½" IP threaded hub
- Cable or tether provided for added safety
- Mount fixture using S-hook. Do not mount using cable or cord sets only

Finish

- Standard white polyester powder coat finish painted after fabrication

Feature Header

- cULus listed for damp location
- IP65 hose down rating
- Operating ambient temps -40°C to 45°C (-40°F to 113°F)
- DesignLights Consortium Qualified, refer to www.designlights.org for details

Warranty

- 5-year warranty