Features

- Handshower features transitional design, inspired by nature
- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Thumb tab allows for a smooth transition between sprays
- Spray nozzles cover full area of sprayhead
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) flow rate.
- Requires K-8593, K-9514, K-45981, or K-45982 shower hose (sold separately)
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

Material

- KOHLER finishes resist corrosion and tarnishing

Installation

- Bracket or slidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Required Products/Accessories

K-8593 72" Shower Hose
 or
K-9514 60" Shower Hose
 or
K-45981 72" ribbon hose
 or
K-45982 60" ribbon hose

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
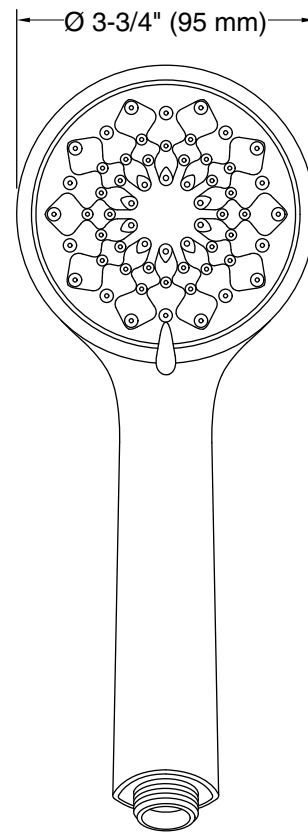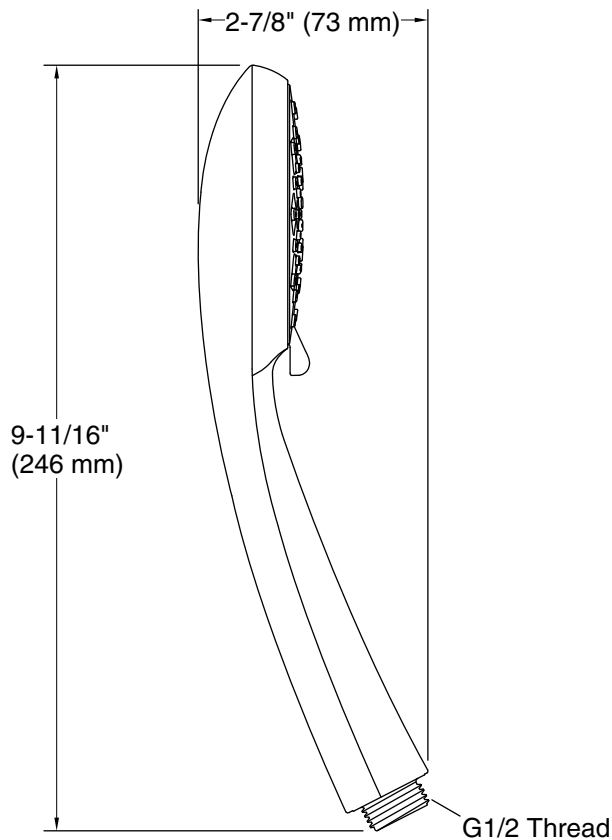NOM Standards
  NOM 008-CONAGUA

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada
8-30-2025 00:03 - US/CA

THE BOLD LOOK
OF **KOHLER**®

2-7/8" (73 mm)

9-11/16"
(246 mm)

G1/2 Thread

Ø 3-3/4" (95 mm)

Technical Information
All product dimensions are nominal.
Spout:
Handshower rated max flow: 1.75 gal/min (6.6 l/min)

Notes
Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshower. Please consult with local plumbing officials.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshower. Please consult with local plumbing officials.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada
8-30-2025 00:03 - US/CA

THE BOLD LOOK
OF KOHLER®