

## S5998TRM Shower/Hand Shower Trim Specification Submittal

Location:

### Model Numbers

- ☐ **S5998TRM**  
Shower/Hand Shower Trim

#### Valve Options:

- S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier
- S162 Series Temptrol VersaFlex Shower Valve requires TC modifier

### Compliance

- ASME A112.18.1 / CSA B125.1.
- WaterSense 1.5 gpm (5.7 L/min) / 2.0 gpm (7.6 L/min).
- Lever handle and hand shower meet ADA requirements for operation.



### Warranty


**Limited Lifetime** - for residential installations.  
**10 Years** - for commercial/industrial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



### Feature Highlights

- Birch® Shower/Hand Shower Trim.
- Requires Temptrol® Pressure Balancing Tub/Shower Valve.
- Integral diverter control.
- Metal lever handle.
- 30" slide bar for hand shower wand.
- Dual checks for backflow protection.
- 60" flexible metal hose.
- Single-mode HydroMersion™ hand shower with Non-Positive Shutoff (NPSO).
- Single-mode HydroMersion showerhead.
- 2.0 gpm (7.6 L/min) flow restrictors.
- Components made from metal and nonmetal materials, plated in standard Polished Chrome finish.

### Modifications

- ☐ **15**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L2** Less hand shower
- ☐ **L3** Less showerhead and hand shower
- ☐ **L4** Less showerhead, arm and flange
- ☐ **L7** Less handle
- ☐ **STN** Satin Nickel finish
- ☐ **TC** Test Cap Trim (includes TA-10 & T-12A) *used with S162 series Temptrol Valve*

### SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S5998	STN	L3		TRM	TC	S5998STNL3TRMTC
S5998	STN			TRM		S5998STNTRM

**Note:** No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

### Architectural/Engineering Specification

Symmons Birch® Shower and Hand Shower Trim \_\_\_\_\_ Includes Birch® Shower and Hand Shower Trim powered by Temptrol® Pressure Balancing Tub/Shower Valve, integral diverter control. Features include metal lever handle, 30" slide bar for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, single-mode HydroMersion hand shower with NPSO, single-mode HydroMersion showerhead, 2.0 gpm (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials, plated in standard Polished Chrome finish. 10 Year Commercial Warranty. ASME A112.18.1 / CSA B125.1 and WaterSense 1.5 / 2.0 complaint. Lever handle and hand shower meet ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower, L3 = Less showerhead and hand shower, L4 = Less showerhead, arm and flange, L7 = Less handle, STN = Satin Nickel finish, and TC = Test Cap Trim.

## Dimensions

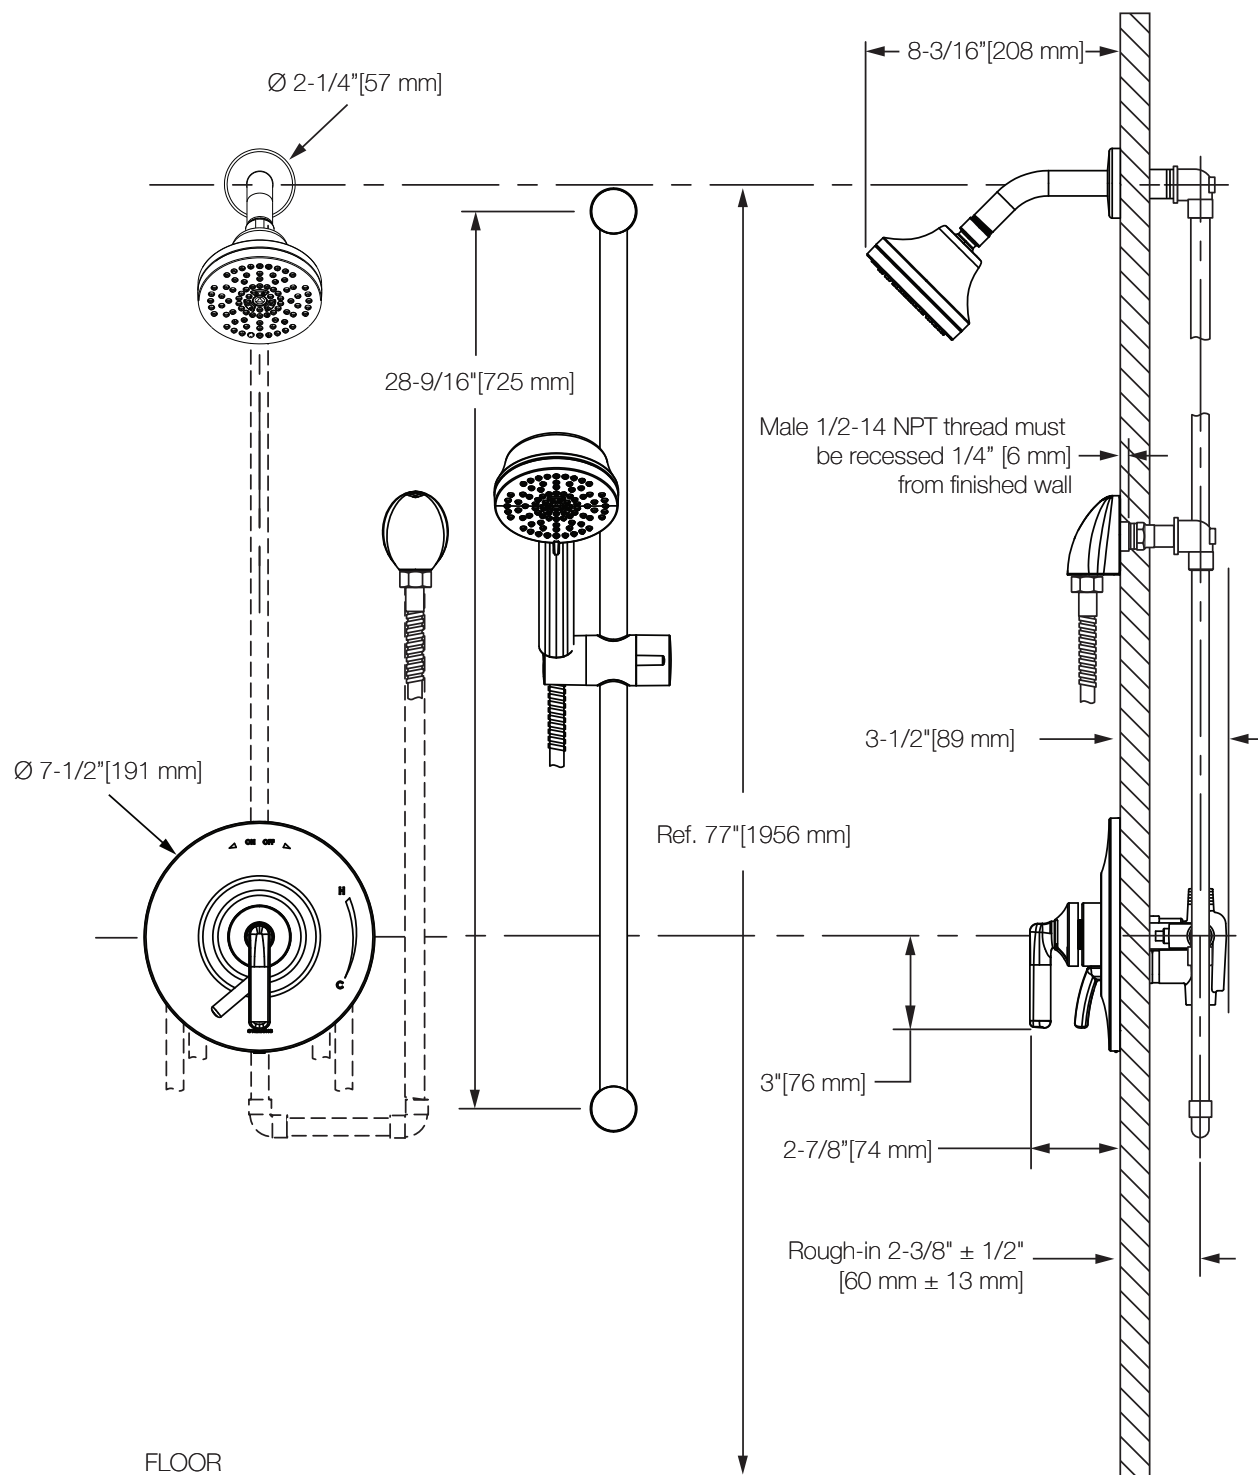

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls  $1/2"$  or greater.
- 3) All dimensions measured from nominal rough-in (see  $2\text{--}3/8" \pm 1/2"$  [60 mm  $\pm$  13 mm] as reference).
- 4) Dimensions subject to change without notice.