

OVERVIEW

This plug-and-play lamp offers a simple and efficient lighting solution for task lighting. Its instant-on soft white light is ideal for brightly illuminating spaces without overpowering them. A 50,000-hour lifespan means less bulb replacement.

KEY FEATURES

- Operation temperature: -4°F - 104°F
- Storage temperature: -4°F - 104°F
- THD: 20%
- Target replacement: 26W/G24Q or GX24Q
- Direct replacement/Ballast compatible: New or existing ballast is required for operation; can work with ballast bypass
- Shatter-resistant

Catalog #		Type
Project		
Comments		Date
Prepared by		



DAMP-
RATED



INSTANT-
ON



VERTICAL
INSTALLATION



BEAM
ANGLE



50,000
HOURS



ORDERING INFORMATION

SOURCE	WATTAGE	LAMP TYPE	BASE	CCT	ORIENTATION
L = LED Linear	12 = 12W	PL = PL Lamp	G24D UNIVERSAL	35 = 3500K 40 = 4000K 50 = 5000K	V = Vertical


*See ballast compatibility chart at www.amconservationgroup.com

SPECIFICATIONS


CATALOG #	WATTS	EFFICACY	CCT	LM	CRI	VOLTAGE	PF	HZ	DIM
L12PL40G24DV	12W	100 lm/W	4000K	1200 lm	≥80	120-277V	≥0.9	60 Hz	No
L12PL50G24DV	12W	100 lm/W	5000K	1200 lm	≥80	120-277V	≥0.9	60 Hz	No

DIMENSIONS

PRODUCT



CASE

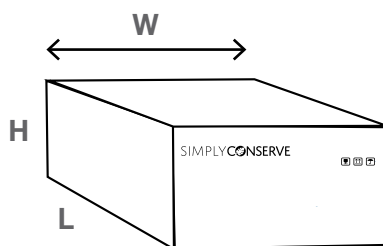

CATALOG #	L	W	BASE
L12PL40G24QH	4 47/50	1 19/20"	G24D UNIVERSAL
L12PL50G24QH	4 47/50	1 19/20"	G24D UNIVERSAL

L	W	H	CASE QTY	GROSS WT
32 1/5"	27 21/100"	21 6/25"	60	10.3 lb.
32 1/5"	27 21/100"	21 6/25"	60	10.3 lb.

5-Year Limited Warranty



If this PL lamp fails to operate for a 5-year period under normal consumer use (6 hours/day, 7 days/week), from the date of purchase or distribution by an energy conservation program and has been properly installed, AM Conservation Group will replace the lamp free of charge.

For warranty claims, please contact:

customercare@amconservationgroup.com

To learn more, please visit:

www.amconservationgroup.com