» Features






» Drawing

pad Print

Q&A

Under Counter

» Specification Table » Installation Instructions

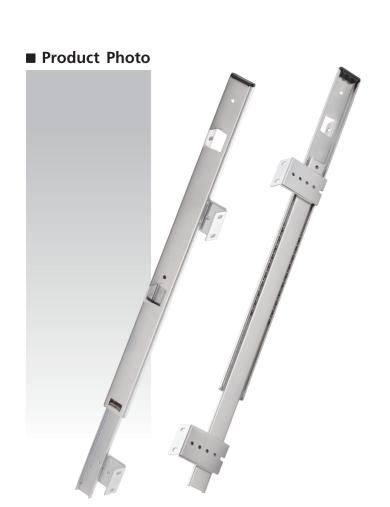

Features

Mounting | Bottom mount on shelf tabs of outer members, inner members mount to the underside of desk or table by mounting brackets.

Slide Clearance | 1-1/16" of inboard position, 1-17/32" of outboard position each side.


1-17/32" of outboard position each side. **Height |** 2-29/64" to 3-99/128" of overall adjustable

height. **Loading** | 50 pound (22 kgs) class.

Size | 12"(300 mm) through 24"(600 mm) at 2"(50 mm) increment.

Feature | Hold-out design holds keyboard in open possition. Hold-in design to prevent bounce back. Shelf tab design for easy drop-mounting. 4 different adjustable heights, mounting bracket.

Option | None.

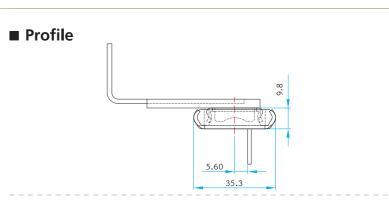

■ Surface Treatment


■ Clear Zinc■ Black Zinc■ White E Coating■ Stainless Steel■ Galvanized Steel

■ Packaging

■ Distribution / 20 pairs per box

*Box QTY might vary with different length, the info provided here is based on 18" (450 mm)

Drawing

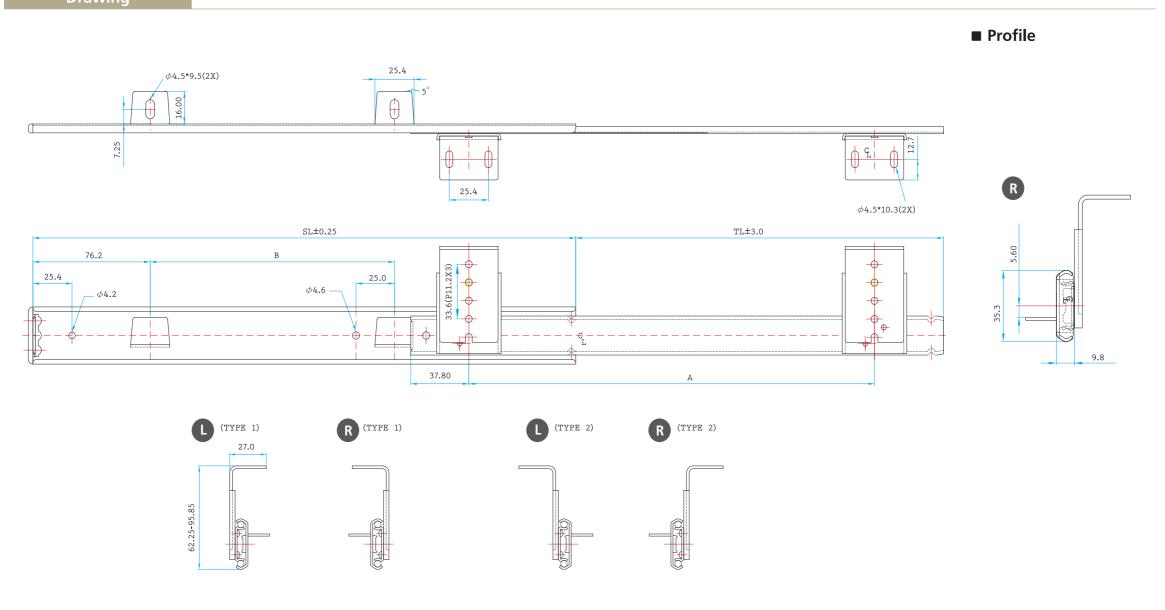


Specification Table

	SIZE		TL		В
12"	(300mm)	302.05	201.0	212.7	107.9
14"	(350mm)	352.85	239.0	263.5	158.7
16"	(400mm)	403.65	277.0	314.3	184.1
18"	(450mm)	454.45	315.0	365.1	209.5
20"	(500mm)	505.25	353.0	415.9	260.3
22"	(550mm)	556.05	391.0	415.9	311.1
24"	(600mm)	606.85	442.0	415.9	361.9

Installation Instructions


QUICK INSTALLATION GUIDE OF NJ-26016

Under Counter Slides, 50 pound (22 kgs) loading

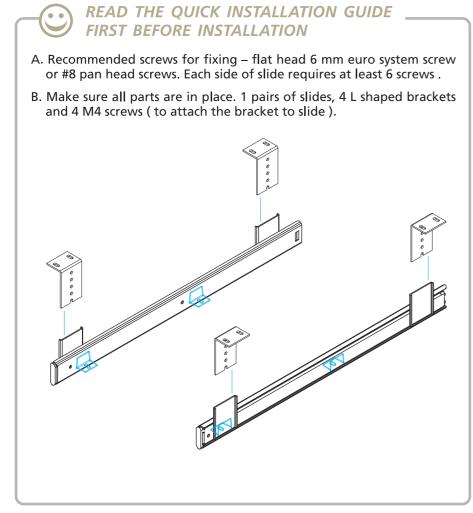

Step 1 > Install the keyboard shelf to the slides

place keyboard shelf on the shelf tab as shown on fig 1. (Figure 1-1)

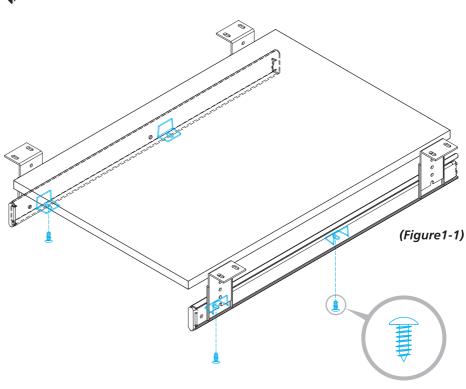


Screw the shelf through the slot on shelf tab from the bottom.

Step 2 > Install the shelf to the desk bottom

Select L shaped bracket direction (inboard or outboard) and height (62.25 mm~95.58 mm), then secure the brackets with M4 screws. (Figure2-1)

Attach brackets to the desk bottom ad screw them with 2 #8 screws per bracket.

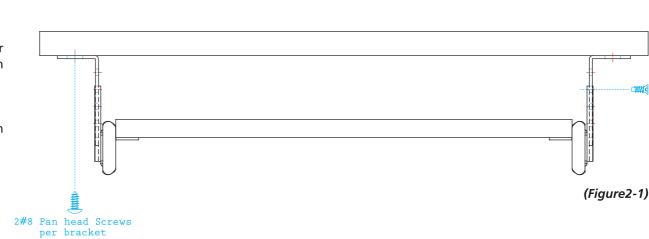

Final Adjustment......

Try to open and close the drawer to see if lock open and slides function correctly. If so, secure the screws and install additional screws as necessary.

*This instruction is for reference only. It may vary due to different applications.

