

NARROW WIDTH, GLASS DOOR MERCHANDISER REFRIGERATORS

MODEL: ☐ MXM2-36RHC ☐ MXM2-36RBHC ☐ MXM2-36RSHC ☐ MXM2-36RSBHC



MXM2-36RHC



MXM2-36RBHC



MXM2-36RSHC



MXM2-36RSBHC


Maxx Cold Narrow Width, Double Glass Door Merchandisers are ideal for compact environments offering an attractive display for last minute purchases or storage depending on the foodservice, beverage and retail application. The upright refrigerated cabinets are available in two door, self-closing swing doors or sliding doors. Smooth, powdered coated steel exterior is available in either white or black with an illuminated top to personalize your advertising message. Refrigerated Merchandiser units are supplied with four (4) adjustable shelves per door, lock and key set and interior LED lighting to display merchandiser contents. Electronic thermostat and digital LED temperature display regulate accurate temperature, prolonging and preserving shelf life of products. Not only are controls simple to use, operation is energy efficient with CFC refrigerant and foam insulation.

FEATURES AND CONSTRUCTION

- Smooth, powder coated steel exterior available in either white or black
- Low-e double pane glass doors
- Four (4) adjustable heavy-duty PE-coated wire shelves per door, include pricing strips
- Electronic thermostat and digital LED temperature display
- HC refrigerant R290
- CFC refrigerant and foam insulation
- Self-closing swing doors or sliding doors available, both are provided with lock and key set for security
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed
- Interior LED lighting
- Designed with an illuminated plastic merchandising top panel

ELECTRIC

115V / 60Hz / 1Ph
6' (2m) power cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
TechnicalServices@TheLegacyCompanies.com or 877.368.2797

NOMINAL STORAGE CAPACITY

MXM2-36RHC/36RBHC..... 36 Cu Ft (1019 L)

MXM2-36RSHC/36RSBHC..... 36 Cu Ft (1019 L)


TEMPERATURE

Holding temperature 33°F to 41°F (1°C to 5°C)


- Oversized refrigeration system delivers optimum storage temperature and rapid temperature recovery




MXM2-36RHC/36RBHC

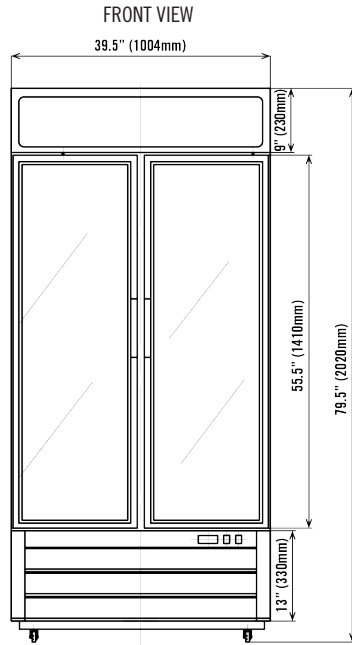




SIDE VIEW

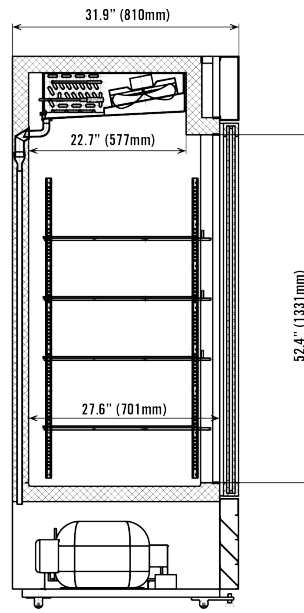

TOP VIEW

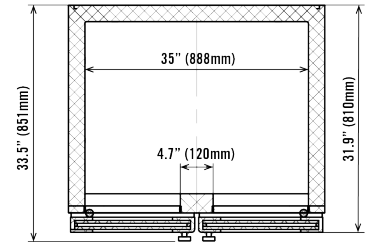

MXM2-36RSHC/36SRBHC

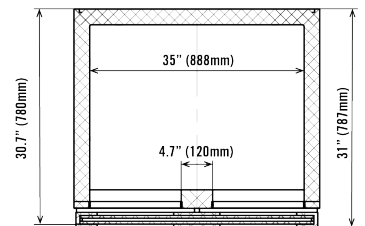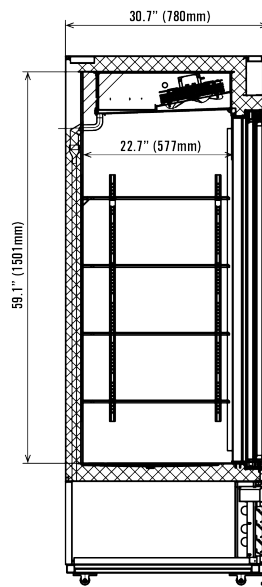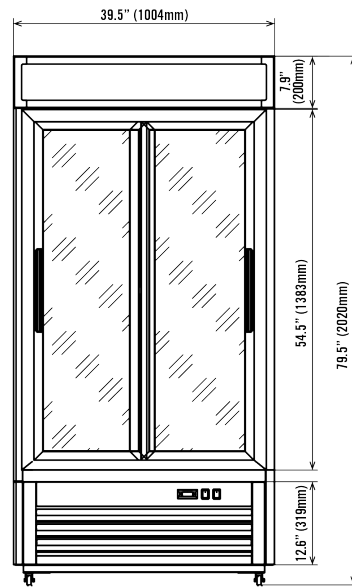

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS	ELECTRICAL
MXM2-36RHC	39.5" x 33.5" x 79.5" (1119 x 851 x 2019 mm)	35" x 27.6" x 52.4" (889 x 701 x 1331 mm)	36 Cu Ft (1019 L)	33°F to 41°F (1°C to 5°C)	4.5A	430 lbs (196 kg)	R-290A 3.07 oz (105 g)	2 Swing	115V / 60Hz / 1Ph
MXM2-36RBHC	39.5" x 33.5" x 79.5" (1119 x 851 x 2019 mm)	35" x 27.6" x 52.4" (889 x 701 x 1331 mm)	36 Cu Ft (1019 L)	33°F to 41°F (1°C to 5°C)	4.5A	430 lbs (196 kg)	R-290A 3.07 oz (105 g)	2 Swing	115V / 60Hz / 1Ph
MXM2-36RSHC	39.5" x 31" x 79.5" (1119 x 787 x 2019 mm)	35" x 22.7" x 52.4" (889 x 577 x 1331 mm)	36 Cu Ft (1019 L)	33°F to 41°F (1°C to 5°C)	4.5A	430 lbs (196 kg)	R-290A 3.07 oz (105 g)	2 Sliding	115V / 60Hz / 1Ph
MXM2-36RSBHC	39.5" x 31" x 79.5" (1119 x 787 x 2019 mm)	35" x 22.7" x 52.4" (889 x 577 x 1331 mm)	36 Cu Ft (1019 L)	33°F to 41°F (1°C to 5°C)	4.5A	430 lbs (196 kg)	R-290A 3.07 oz (105 g)	2 Sliding	115V / 60Hz / 1Ph

INSTALLATION

- Units are equipped with roller wheels and leveling feet.
- Door Handles are removable if unit is needed to fit through a 32" width door frame.