Please do not tighten any bolts until everything is in place, just barely get the bolts and nuts on. To save your time, watch the assembly video first. Please follow the assembly steps strictly.

Tips: single alphabet is bar, double alphabet is screws






Please scan the QR code for the assembly video

Dear Customer, Thank you for your order.


If you have questions or quality problems during the installation and use, please email us at first thought your order(or email to us: service@homezillions.com). we will reply you within 12 hours and solve your problem as soon as we can. We hope our products will give you a great shopping experience. Thank you!


Here is the installation video on YOUTUBE for your referance. Not the same products. The Youtube code is Tu-6SAc_dGA You just search the code on YOUTUBE, the video will be there.


Hareware List

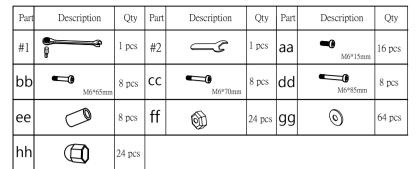


Part List

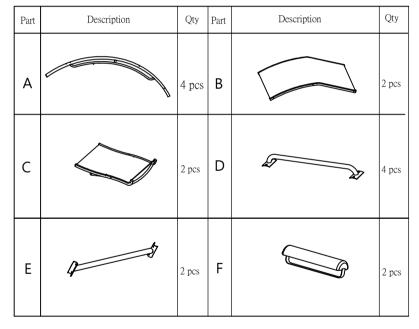







SCREW UP

TURNOVER

UNSCREW

Dear Customer, Thank you for your order.

If you have questions or quality problems during the installation and use, We hope our products will give you a great shopping experience. Thank you! please email us at first thought your order(or email to us: service@homezillions.com). we will reply you within 12 hours and solve your problem as soon as we can.

Q&A

Q1: Here is the installation video on YOUTUBE. The Youtube code is kpO4Q5vkq1Y you just search the code on YOUTUBE, the video will be there. Just remind: Do not tighten too tightly when installing, You should just put the nuts thread to the screws, no more tight. Please tighten after installing. (This is the most important step.)

Q2: Why doesn't the hole position match my product? It Can't be installed.

A2: You can loose all the screws. Just little on the nuts thread. As the photo shows. And then adjust the shell frame. You will match the holes.



Q3: Why I can't fix the middle seat to the shell frame. It has a long distance.

Because we use high-quality Teslin cloth, based on the micro-elasticity of Teslin cloth. To prevent for long time using, the cloth will be loosed and the fabric of the seat will sink, which will affect the appearance and comfort.

A3: Step 1: Loose all the screws. Just little on the nuts thread. As the up photo shows.

Step 2: Fix the shell frame as the instruction. And then put the two feet seat together first, Keep this Step about 12 hours. (make sure to Keep the seat fabric in a stretched state.)

Step 3: You can fix the middle seat nuts thread as the instruction shows.

Step 4: Youtube code is $kpO4Q5vkq1Y\;$ this is the YOUTUBE VEDIO show how to fix the seat.

Q4: The plastic part of my backrest is crooked. The location is incorrect.

A4: You can use the tool to loose the nuts thread of the plastic parts, and adjust the position to

correct.



Part No.:B



Make sure the curved part is in the front of the chaise lounge.

WHAT'S APP: HOMEZ

