

## Features

- · Solid brass body
- · Ceramic disk cartridge
- Single lever handle
- 180 degree swivel spout
- Installation in a 1-3/8" hole
- 1-1/2" maximum deck thickness
- High arc spout with pull-out spray head
- Dual function ABS pull-out spray head aerated stream or spray
- 1.8 gpm max. (6.8L/min) @ 60psi saves 20% more water
- Flexible supply lines with 3/8" compression fittings


### **Optional Accessories**

• T3600 soap dispenser.

### Warranty

- · Lifetime Limited Warranty for residential use
- 5 Year Limited Warranty for commercial use



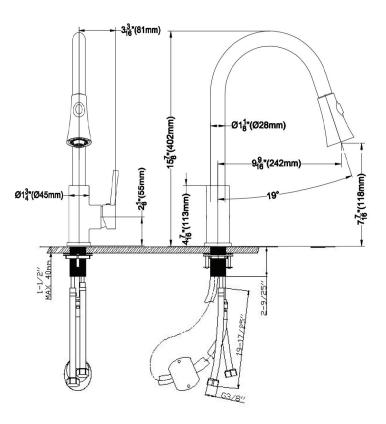

### **Specified Model**

Model	T3580
Faucet Height	15 <sup>7</sup> / <sub>8</sub> " (402 mm)
Spout Reach	9%16" (242 mm)
Deck to Aerator	7 <sup>7</sup> / <sub>16</sub> " (118 mm)
Flow Rate	1.8 gpm max (6.8L/min) @ 60 psi
Shipping Weight	9 lbs.
Material	brass construction
Installation	deck mount, single hole

## To Be Specified:

Finish
PC Polished Chrome
LS Luxe Stainless

## **Codes/Standards**

Certified to CUPC Certified to AB1953 Certified to NSF/ANSI 61 Complies with Federal Lead Plumbing Law as certified with IAMPO R&T inc. ADA complaint for lever handle



# Notes

Install this product according to the installation instructions.

# Single Lever Pull-Out Spray HOLMES T3580