


TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET  
WITH RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH AND FLEXIBLE UNDERBODY



6540.270 Shown

MODEL NUMBER:

- ❑ **6540.270 Widespread Lavatory**  
Flexible underbody for installation on 6" - 12" centers. 1.5 gpm Pressure compensating aerator. Field-convertible rigid/swivel gooseneck spout. Vandal-resistant wrist blade handles. Less drain and pop-up hole.
- ❑ **6540.275 Widespread Lavatory**  
Flexible underbody for installation on 6" - 12" centers. 0.5 gpm Pressure compensating multi-laminar spray. Field-convertible rigid/swivel gooseneck spout. Vandal-resistant wrist blade handles. Less drain and pop-up hole.

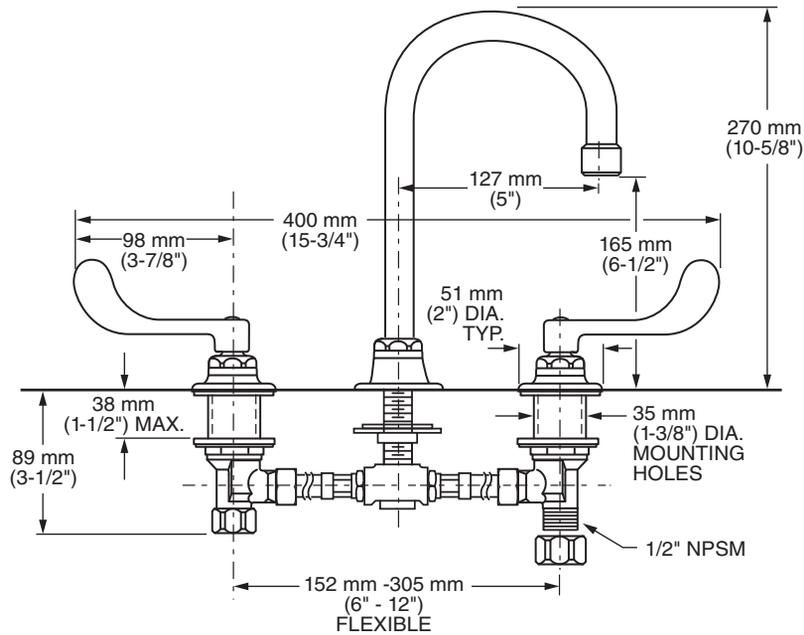

GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with flexible underbody for installation on 6" - 12" centers. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout. Vandal-Resistant Wrist Blade handles with blue & red color indexes.

PRODUCT FEATURES:

**Pressure Compensating Aerator:** Provides a constant water flow throughout the pressure range.

**Solid Brass Construction:** Durable. Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assure a lifetime of drip-free performance.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

SUGGESTED SPECIFICATION

Two handle widespread lavatory faucet shall feature cast brass valve bodies with flexible underbody for installation on 6" - 12" centers. Shall feature water-conserving Pressure Compensating Outlet. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature field-convertible rigid/swivel spout. Fitting shall be American Standard Model # 6540.27\_002.




**MONTERREY®**

**TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET  
WITH RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH AND FLEXIBLE UNDERBODY**

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF 372**

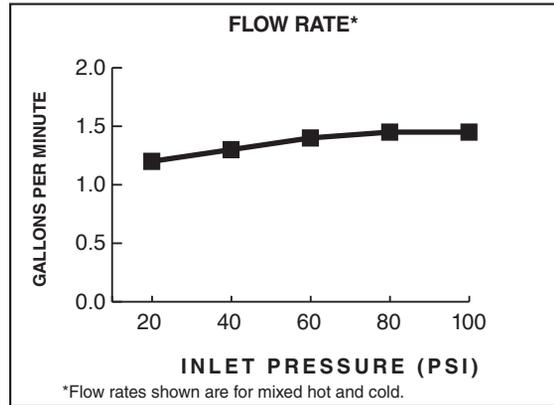

Product Number	Description	Finish
		Polished Chrome
		002
6540.270	Widespread Lavatory with field-convertible rigid/swivel gooseneck spout. Flexible underbody for installation on 6" - 12" centers. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-resistant wrist blade handles. Less drain and pop-up hole.	
6540.275	Widespread Lavatory with field-convertible rigid/swivel gooseneck spout. Flexible underbody for installation on 6" - 12" centers. 0.5 gpm/1.9L/min pressure compensating multi-laminar spray. Vandal-resistant wrist blade handles. . Less drain and pop-up hole.	



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

**Other Aerators Available:**

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
V05*	0.5 gpm (1.9 Lpm) Vandal-Resistant PCA Multi-Laminar Spray
V035*	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Multi-Laminar Spray

PCA - Pressure Compensating  
\*Meet CALGreen Code