


Light Commercial Levers

Specifications


Door Preparation:	Cross bore 2 1/8-in edge bore 1-in, 1-in x 2 1/4-in latch mortise
Backset:	2 3/8-in or 2 3/4-in
Door Thickness:	1 3/8-in to 2-in
Cylinder:	SC1, 5 pin
Chassis:	Tubular
Faceplate:	2-1/4-in square corner
Strikes:	Full lip strike and T-strike
Bolt:	1/2-in Throw
UL:	3 HR fire rated
ADA:	Yes
Door Handing:	All hardware is reversible for left or right handed doors.
ANSI Grading:	Meets Grade 2 standards
Rosette Diameter:	2-5/8-in




Functions




ANSI F81 Keyed Entry



ANSI F76B Privacy




ANSI F75 Passage



ANSI F86 Storeroom

Dimensions

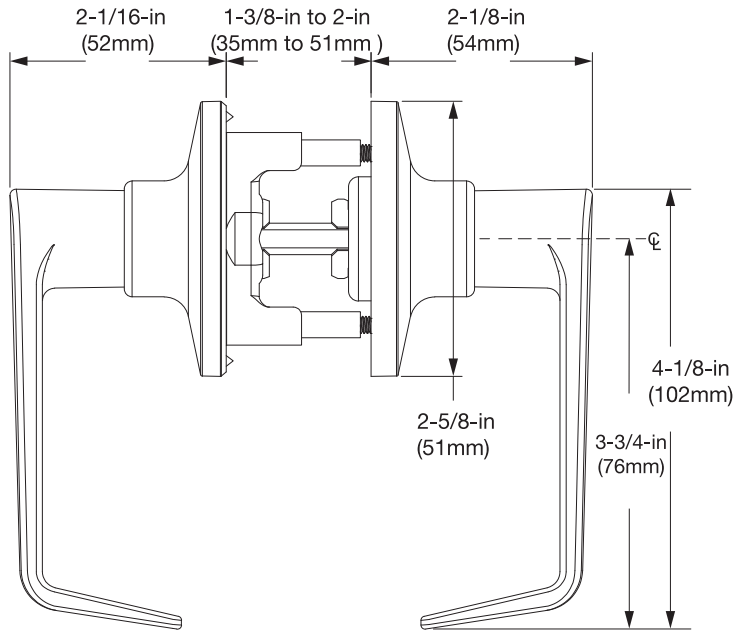

Finishes



Satin Chrome



Matte Black