


ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0481

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.


Hardware Package (included):

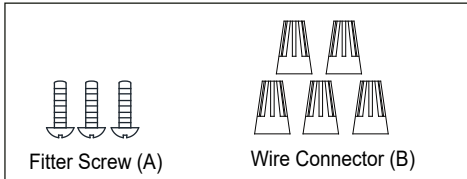

Installation Steps

Turn off the power at fuse or circuit box

1. Unscrew the finial and the rubber pad on the upper cover.
2. Unscrew set screws and remove the threaded pipe and iron plate from the metal frame.
3. Gently place four glass panels into the metal frame, then press the clips to secure the glass panels. (Fig.1)

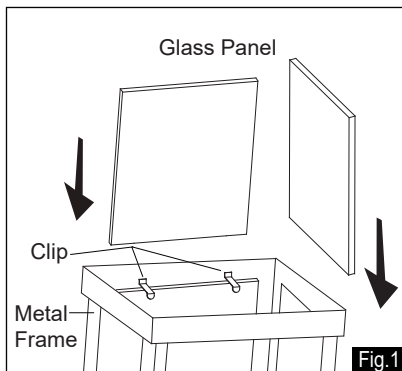


4. Attach the candle tubes onto the sockets.
5. Install three bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
6. Pull out the wires and grounding wire from the post. Make wire connections using the wire connectors (B):
 - The black wire from the fixture to the black wire from the post.
 - The white wire from the fixture to the white wire from the post.
 - The grounding wire from the fixture to the grounding wire from the post.Carefully put the wires back into the post.



7. Place the fitter on the post, then secure it with the fitter screws (A).

CAUTION: With silicone caulking compound, caulk completely around where the fitter meets with the post surface to prevent water from seeping into the post.

Turn on the power at fuse or circuit box

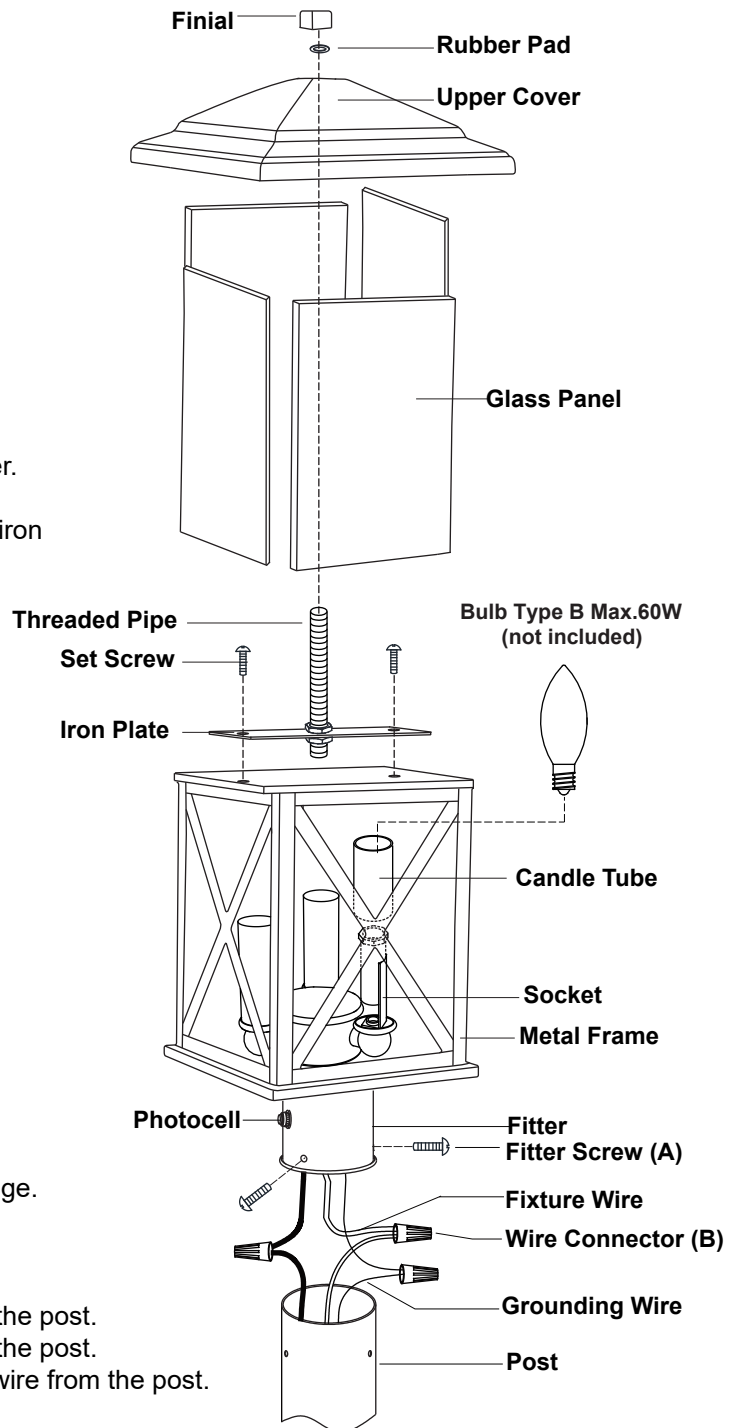

Operation the Unit Without Photocell

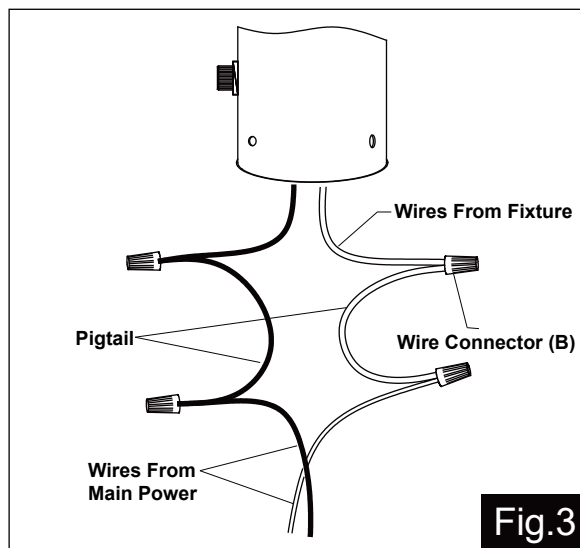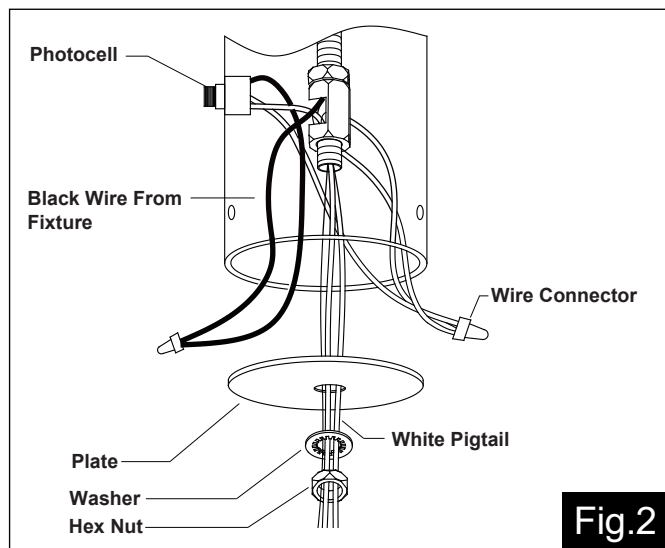


1. Turn off the power at the fuse or circuit box before starting installation.
2. Unthread the fitter screw and plate, and then Loosen the wire connectors connected with the wires from photocell. (See Fig.2)
Note: Do not move the photocell to prevent water from seeping into the outlet box.
3. Take a white pigtail and black pigtail and make wire connections using wire connectors (B) : (See Fig.3)
 - a. The black wire from the fixture to one end of the black pigtail.
 - b. The white wire from the fixture to one end of the white pigtail.
 - c. The other end of the black pigtail to the black wire from the power source.
 - d. The other end of the white pigtail to the white wire from the power source.
 Put all wires back into the back plate of the fixture.


Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.


Spare Parts List:

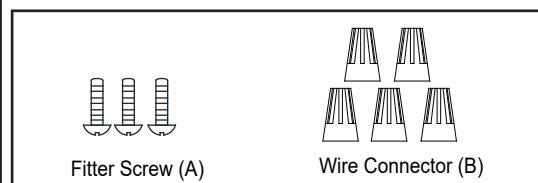

Assembly Kit
6048MM (1SET)



Glass Shade
10066RG (4PCS)

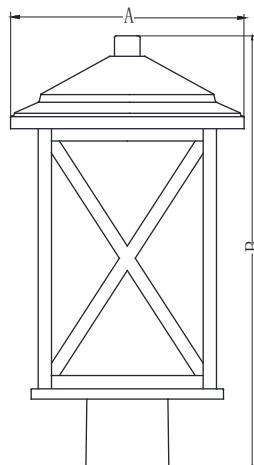

A:9"
B:16-3/4"