Assembly Instructions

Caution: You must read this before you proceed

Care & Maintenance



Not for commercial use. For residential use only.



 Furniture may scratch floors. We recommend using furniture pads to protect your floors.



Do not put hot items directly on furniture surface.



• Do not clean furniture with harsh cleansers or polish.



• Do not place furniture under direct sunlight.



Do not place furniture near heating or cooling vents.



 Do not write on furniture without a padded barrier to protect the surface.



Do not place furniture outside . For indoor use only.



 Stains may be removed with mild soap solution and damp cloth.



Children should not climb or jump on the furniture.



 Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in boxes for hardware packs and legs. Sets often ship in multiple boxes and may arrive a day or two apart.


Barstool




Parts List				
Label	Picture	Description	QTY	
Α		Backrest	1	
В		Seat	1	
С		Front Foot Pedal	1	
D		Back Foot Pedal	1	
E		Left Foot Pedal	1	
F		Right Foot Pedal	1	
G		Front Left Foot	1	
Н		Front Right Foot	1	
I		Back Left Foot	1	
J		Back Right Foot	1	

Hardware				
Label	Picture	Description	QTY	
1)		Bolt (M8X70mm)	9	
2	(3111111111111)	Bolt (M4X60mm)	9	
3		Spring Washer	9	
4		Flat Washer	9	
(5)		Allen Wrench	1	
6		Screwdriver	1	

Assembly Preparation



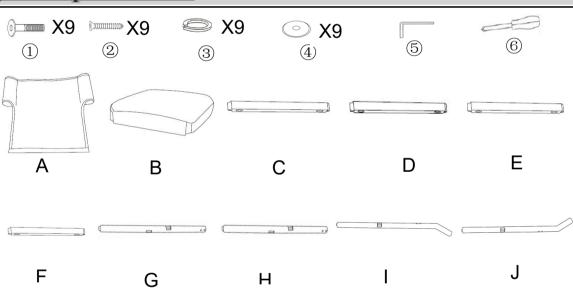



· Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




• Assemble on a clean non-marring surface (packing foam)-




Save all packaging until finished-

Assembly Steps

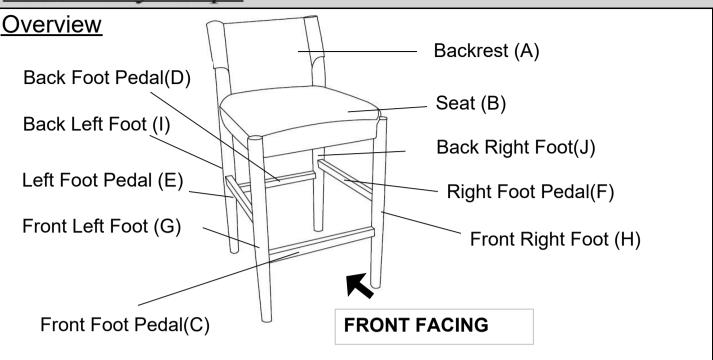


This Barstool has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Barstool parts, the above picture is provided to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

Friendly reminder: Tighten all the screws after all holes are installed.

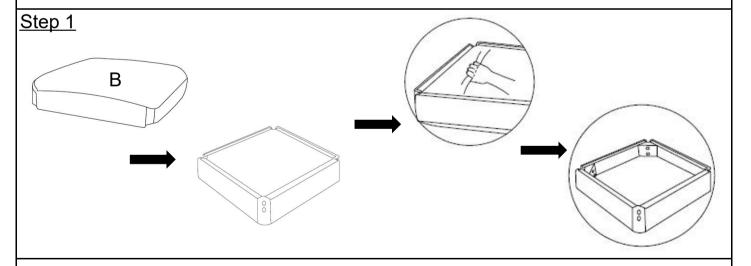


Take out Seat(B)


Tear off the Velcro on the non-woven fabric at the bottom of the seat to expose the lock hole of the internal frame of the seat.

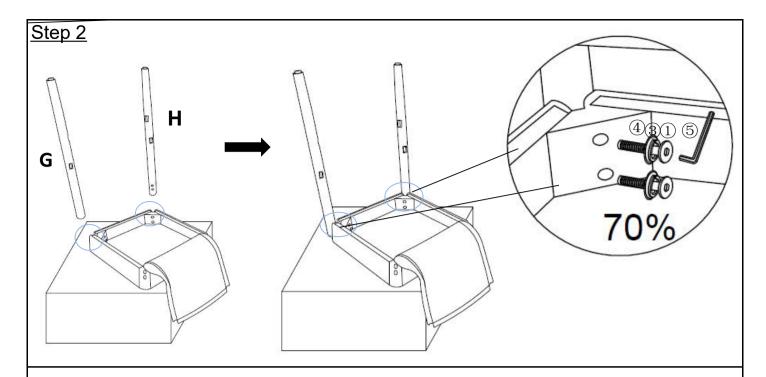


Take out Front Right Foot(H) and Front Left Foot(G)
Attach them to front of Seat(B) as shown
Using Bolt(①) and Spring Washer(③) and Flat Washer(④) with Allen Wrench (⑤) as shown **Do Not Fully Tighten the Bolts.**

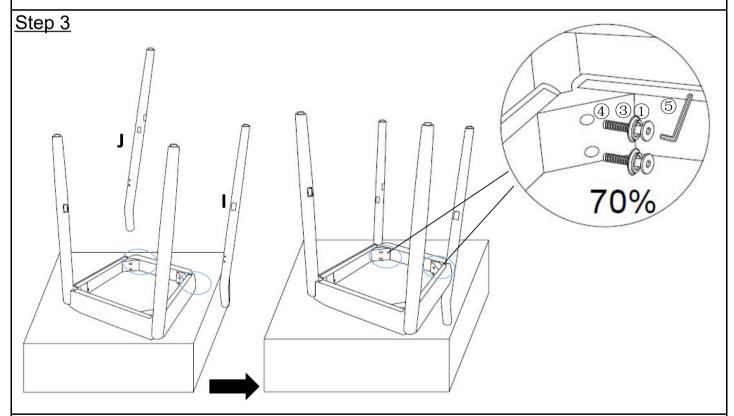


Take out Back Left Foot(I) and Back Right Foot(J)
Attach them to back of Seat(B) as shown
Using Bolt(①) and Spring Washer(③) and Flat Washer(④) with Allen Wrench (⑤) as shown **Do Not Fully Tighten the Bolts.**

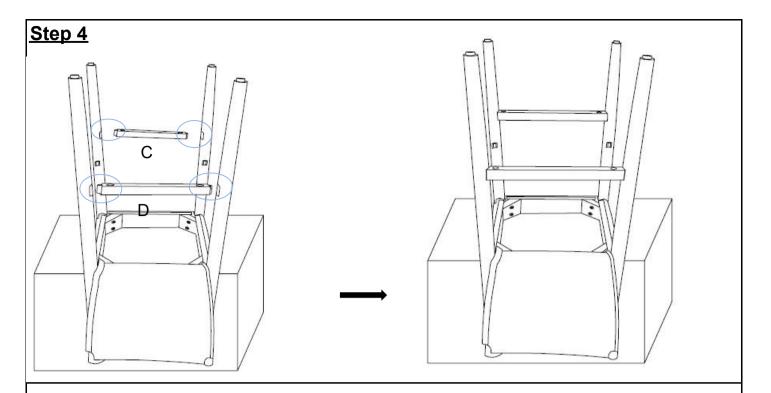

Take out Front Foot Pedal(C) and Back Foot Pedal(D) Insert them into the grooves of legs as shown.

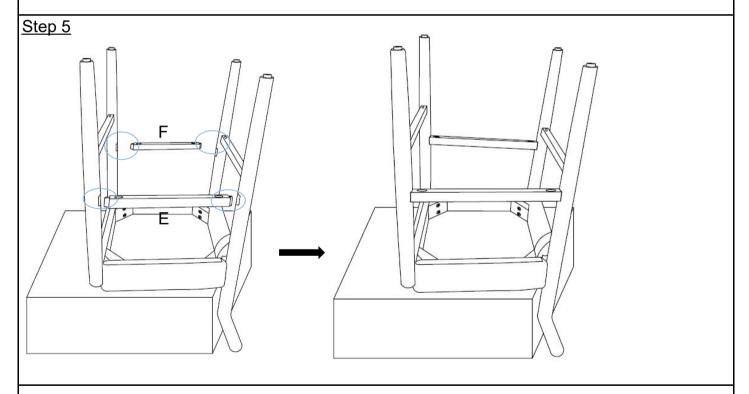

Take out Left Foot Pedal(E) and Right Foot Pedal(F) Insert them into the grooves of legs as shown.

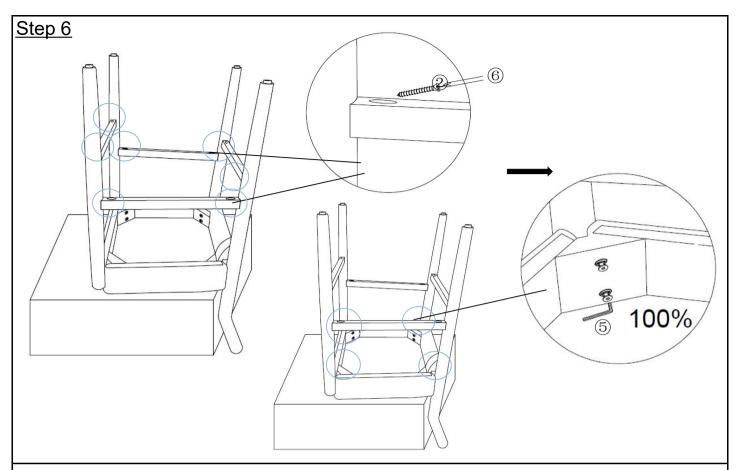


Make sure Front Foot Pedal(C) and Back Foot Pedal(D) and Left Foot Pedal(E) and Right Foot Pedal(F) are insert into the grooves

Then use Bolt(2) with Screwdriver (6) to tighten them


If you lock each gear first and then insert it, you won't be able to lock it.

After all four gears are locked, then use Allen Wrench(⑤) to fully tighten all the Bolts.

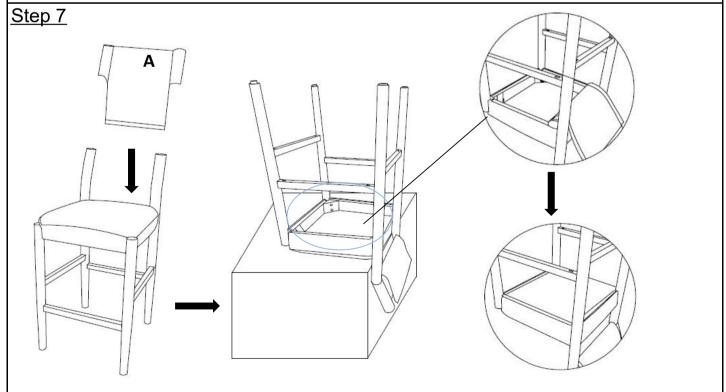

Take out Backrest(A). Insert the leather cover as shown.

Turn around the chair, then reseal the Velcro of seat frame.

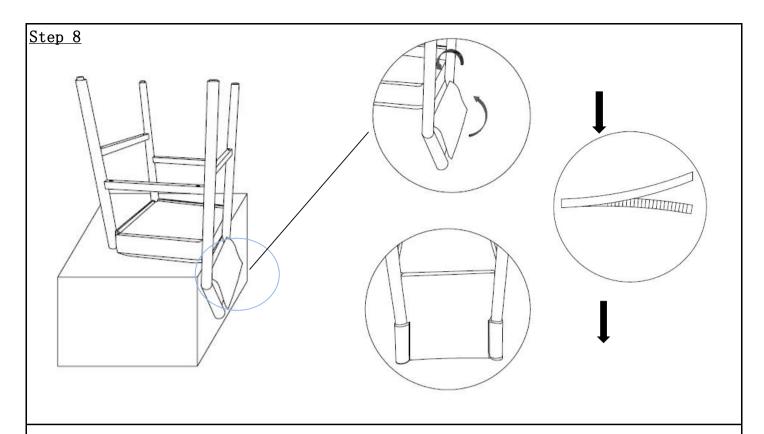

Reseal the Velcro. Attach the fabric behind the backrest along the Velcro to cover the exposed part of the back seat frame as shown.

Step 9



Place the Barstool right side up and tested for stability. **Fully Tighten all the bolts.**

Your Chair is ready for use.

This CHAIR can only be used on a flat, level surface.