


## Technical Information — Sizes

### Moisture Resistant Quarter Round

Quarter Rounds are used to conceal the required expansion space between the wall and the laminate flooring.

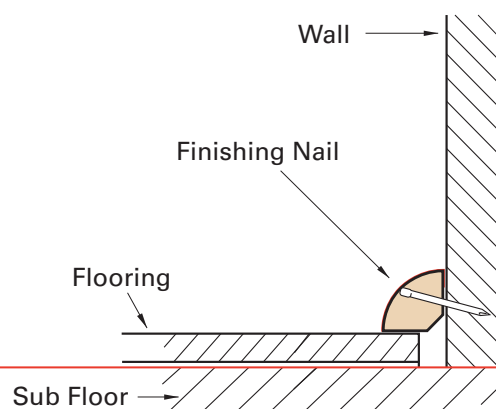
**Surface Material:** Decorative Paper

**Core Material:** Exterior Grade Composite Wood Product

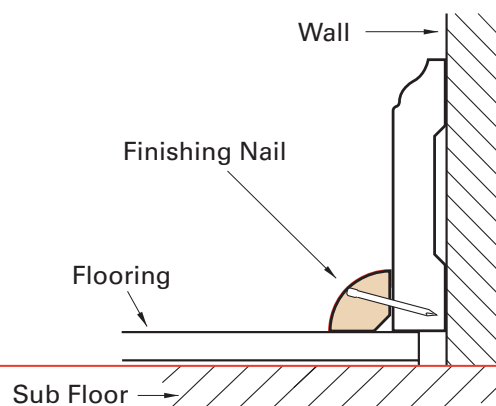


## Applications

### Quarter Round Installed Without a Wall Base

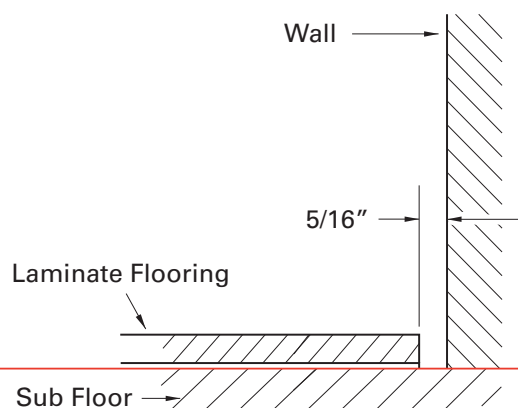


### Quarter Round Installed With a Wall Base

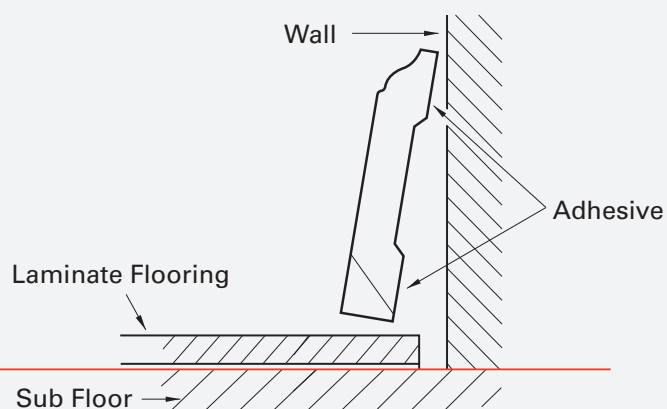


## Quarter Round

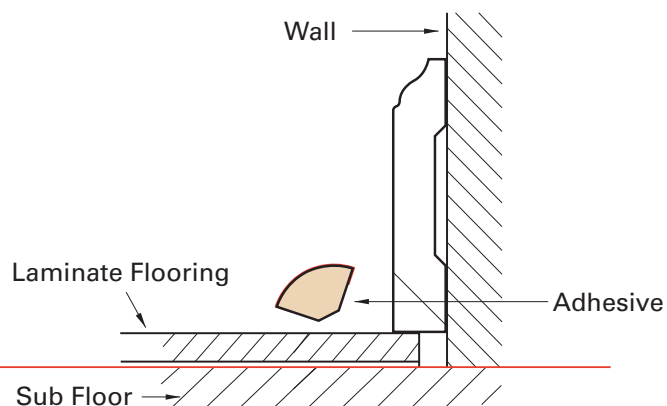
Leave a gap between the wall and the floor as suggested by the manufacturer of the floor, but no more than 1/2" to allow the molding to sit on the floor!

**Step 1**

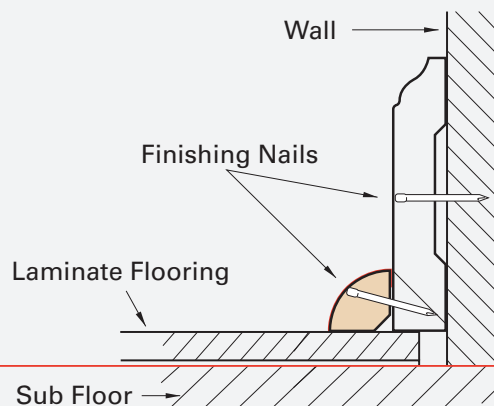
Apply two beads of adhesive on the back side of the wall base molding as shown in the picture and then gently press against the wall and support it with something heavy until it has cured so that it will not pop off the wall.

**Step 2**

Apply one thin bead of adhesive to the back of the Quarter Round and attach it to the wall base molding and support it with a heavy object until the adhesive has cured so it won't pop off the wall base molding (about 24 hours).

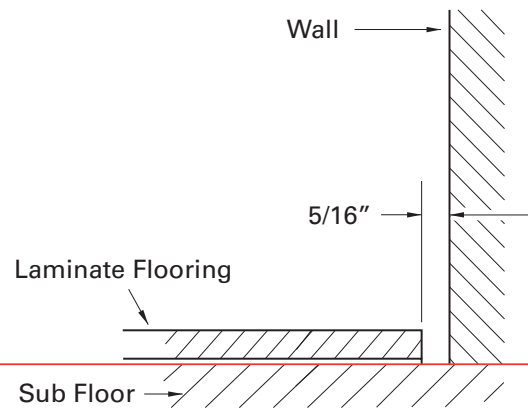
**Step 3**

**Optional Step:** Use finish nails in the wall base molding every 16" and also through the Quarter Round and into the wall base molding. Finish up the nails with a color matching Color Fill!

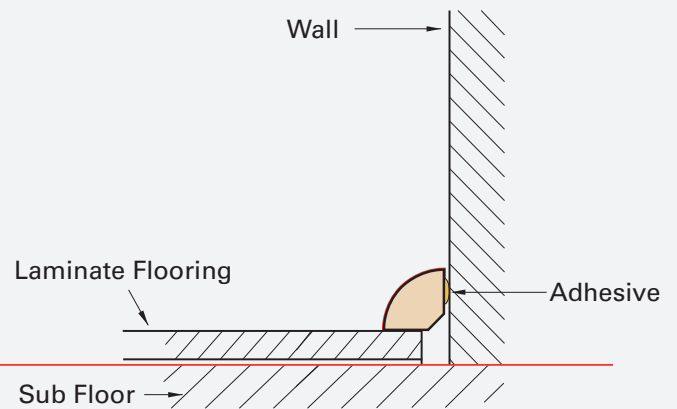
**Step 4**

## Quarter Round

Leave a gap between the wall and the floor as suggested by the manufacturer of the floor, but no more than 1/2" to allow the molding to sit on the floor!

**Step 1**

Apply one thin bead of adhesive to the back of the Quarter Round and attach it to the wall. Support it with a heavy object until the adhesive has cured so it won't pop off the wall (about 24 hours).

**Step 2**

*Optional Step:* Use finishing nails in the Quarter Round molding every 16".

**Step 3**