




HOLDRITE®

QUICK STRAP® EXPANSION TANK BRACKETS

QUICK STRAP® QS-5 QUICK STRAP® QS-12

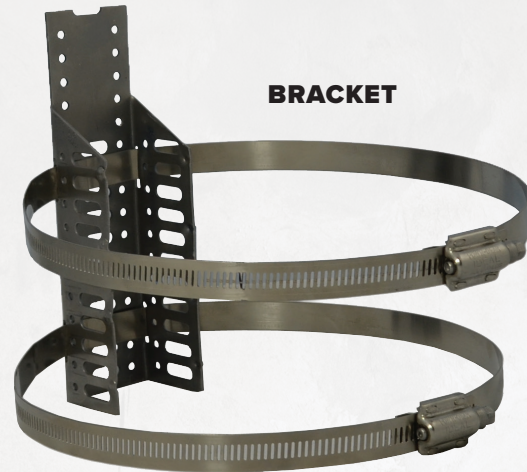

QUICK STRAP® QS-5

Expansion Tank Mounting Brackets

- Secures tank to wall and takes weight load off pipes
- Galvanized and stainless steel construction
- QS-5 Supports tanks up to 9" diameter
- Includes mounting bracket, (2) support straps, and #8 x 1½" mounting screws

QUICK STRAP® QS-12

Expansion Tank Mounting Brackets

- Secures tank to wall and takes weight load off pipes
- Galvanized and stainless steel construction
- QS-12 Supports tanks from 9½" to 13" diameter
- Includes mounting bracket, (2) support straps, and #8 x 1½" mounting screws

Model#	Description	Box Qty	Pallet Qty
QS-5	Up to 2.5 Gallons; Up to 9" Diameter	15	120
QS-12	Up to 5 Gallons; Up to 9.5" to 13" Diameter	15	120



HOLDRITE®

QUICK STRAP® EXPANSION TANK BRACKETS

INSTALLATION INSTRUCTIONS

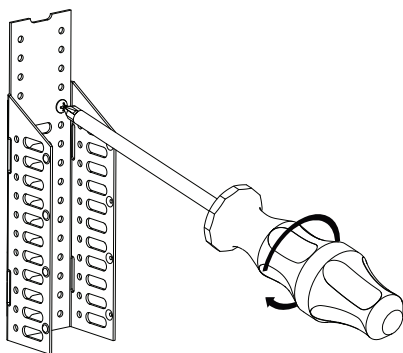


FIGURE 1

Step 1:

Orient mounting bracket vertically. Locate and mark two mounting holes at least 4" apart. Place one hole above upper strap slots in bracket and the other hole below lower strap slots.

Step 2:

Drill pilot holes approximately 1/16" - 3/32" for included screws. For hollow wall or concrete, install appropriate anchors at locations marked in Step 1 (Figure 1). Install screws or anchors.

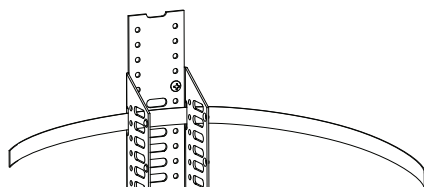


FIGURE 2

Step 3:

Slide the straps through side slots in bracket (Figure 2), and pull about half way through.

Step 4:

Center expansion tank on bracket aligning notch in bracket with rib on tank (if applicable). Tighten straps around tank with 5/16" socket/nut driver. To avoid damaging tank, do not over-tighten (Figure 3).

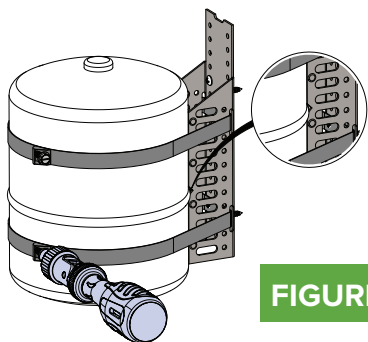


FIGURE 3



#LT66 - 06/17