



## Two-piece elongated toilet, dual-flush K-6393-RA

### **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Right-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf)
- Combination consists of the K-4373 bowl and the K-4458-RA tank
- Dual-flush technology allows you to choose between a full or partial flush
- Eligible for consumer rebates in some municipalities
- 2-1/8" (54 mm) fully glazed trapway

### Installation

- Seat sold separately
- 10" (254 mm) rough-in
- Three-bolt quick-connect installation

### **Recommended Products/Accessories**

K-5588 Purefresh® Deodorizing elongated toilet seat K-4108 PureWash® E750 Elongated bidet toilet seat with remote control

K-5420 Low-Profile Bolt Caps

K-9236 Trip Lever Dual Flush

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

K-4636-RL Cachet® ReadyLatch® Quiet-Close™ elongated toilet seat

### **Included Components**

K-4373 Elongated toilet bowl K-4458-RA Toilet tank, dual-flush





### Codes/Standards

ASME A112.19.2/CSA B45.1 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

### **KOHLER® Toilets and Seats Limited Warranty**

See website for detailed warranty information.


### Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Riscuit



# Two-piece elongated toilet, dual-flush K-6393-RA

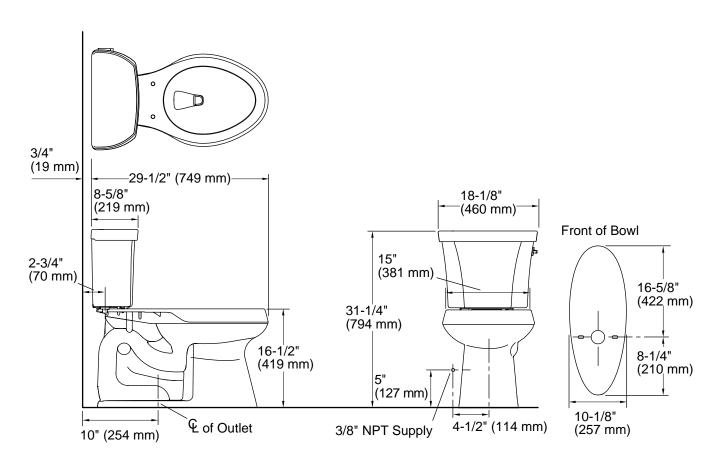

### **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Class Five
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

5-3/8" (137 mm)

Rim to water

surface:

Rough-in: 10" (254 mm) Seat-mounting 5-1/2" (140 mm)

holes:

### **Notes**

Install this product according to the installation instructions.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

