

# One-light Wall Bracket

Wall mounted • Damp location listed



## Description:

Invite the luxurious demeanor of this angelic wall sconce to illuminate your home with a divine ambience. A dainty, etched glass shade is crafted in an elongated cup-like shape. The shade is held in place by a beautiful black frame sure to look stunning in your home decor design.

## Specifications:

- Black (-031) (Painted)
- Steel Construction
- Etched Glass Shade
- Invite the luxurious demeanor of this angelic wall sconce to illuminate your home with a divine ambience.
- A dainty, etched glass shade is crafted in an elongated cup-like shape.
- The shade is held in place by a beautiful black frame sure to look stunning in your home decor design.
- Ideal for any bathroom, hallway, foyer, or stairway.
- Perfect for transitional, modern, or contemporary settings.
- Measures 6-inch width by 11-inch height.
- Uses one integrated LED bulb (9w max).
- Able to be fully dimmable with dimmable bulbs.
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting Round Mounting Plate for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

## Performance:

|                        |                                    |
|------------------------|------------------------------------|
| Number of Modules      | 1                                  |
| Input Power            | 9w                                 |
| Input Voltage          | 120 V                              |
| Input Frequency        | 60 Hz                              |
| Lumens/LPW (Source)    | 624/66 (LM-82)                     |
| Lumens/LPW (Delivered) | /                                  |
| CCT                    | 3000 K                             |
| CRI                    | 90 CRI                             |
| Life (hours)           | 60,000 (L70/TM-21)                 |
| FCC                    | FCC Title 47, Part 15, Class B     |
| Min. Start Temp        | -30 °C                             |
| Warranty               | 5-year limited warranty            |
| Labels                 | cCSAus Damp location listed        |
|                        | ENERGY STAR® qualified             |
|                        | Meets California Title 24 JA8-2016 |

**P710079-031-30**

## Images:



## Dimensions:

Width: Depth: 4"  
Height: 11"  
H/CTR: 3-1/2"

Width: 5-3/4"  
Height: 10-5/16"

# One-light Wall Bracket

Wall mounted • Damp location listed



## Photometrics:

**P710079-031-30**

| ELECTRICAL DATA       |  | P710079-031-30                 |
|-----------------------|--|--------------------------------|
| Input Voltage         |  | 120 V                          |
| Input Frequency       |  | 60 Hz                          |
| Input Current         |  | 0.078                          |
| Input Power           |  | 9                              |
| Power Factor          |  | Greater than 0.90              |
| THD                   |  | <20%                           |
| FCC                   |  | FCC Title 47, Part 15, Class B |
| Operating Temperature |  | -30 °C to                      |
| Dimming               |  | Yes*                           |

\*See Dimming Notes for more information

### P710079-031-30


LED Light Engine: 3000 K 90 CRI

System Wattage: 9

Fixture delivered lumens: 335

Fixture Efficacy: 35.8

Spacing Criteria: 3.44 | 2.86 | 0.35

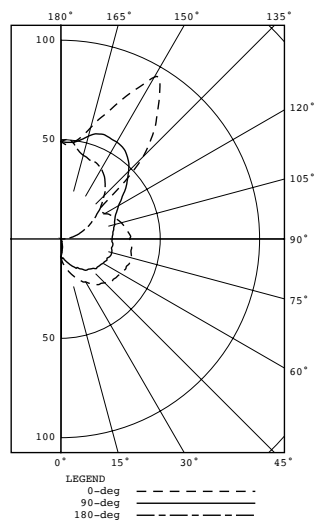

Test 19.00716 Test Date 04/24/19

| CANDELA DISTRIBUTION |              |      |       |       |      | ZONAL LUMEN SUMMARY |        |        |       |
|----------------------|--------------|------|-------|-------|------|---------------------|--------|--------|-------|
| CANDELA              | DISTRIBUTION |      |       |       |      | FLUX                | ZONE   | LUMENS | %FIXT |
| 0.0                  | 45.0         | 90.0 | 135.0 | 180.0 |      |                     | 0-30   | 11     | 3.2   |
| 0                    | 8.9          | 8.9  | 8.9   | 8.9   | 8.9  |                     | 0-40   | 21     | 6.2   |
| 5                    | 12.4         | 11.6 | 9.8   | 7.8   | 6.8  | 1                   | 0-60   | 53     | 15.7  |
| 15                   | 17.6         | 15.7 | 12.1  | 6.5   | 2.7  | 3                   | 0-90   | 119    | 35.6  |
| 25                   | 23.0         | 20.7 | 15.5  | 6.8   | 1.2  | 6                   | 90-120 | 74     | 22.0  |
| 35                   | 27.4         | 25.1 | 18.5  | 6.8   | 0.0  | 10                  | 90-130 | 100    | 30.0  |
| 45                   | 31.2         | 28.8 | 21.3  | 6.8   | 0.0  | 14                  | 90-150 | 169    | 50.6  |
| 55                   | 33.9         | 31.9 | 23.6  | 6.9   | 0.0  | 18                  | 90-180 | 216    | 64.4  |
| 65                   | 35.9         | 34.3 | 25.5  | 7.1   | 0.3  | 21                  | 0-180  | 335    | 100.0 |
| 75                   | 36.7         | 35.5 | 26.5  | 7.0   | 0.0  | 23                  |        |        |       |
| 85                   | 35.7         | 35.1 | 26.3  | 6.8   | 0.1  | 23                  |        |        |       |
| 90                   | 34.7         | 34.2 | 25.8  | 7.6   | 0.7  |                     |        |        |       |
| 95                   | 34.3         | 34.0 | 26.3  | 9.8   | 4.1  | 24                  |        |        |       |
| 105                  | 31.5         | 32.1 | 28.1  | 14.2  | 9.1  | 25                  |        |        |       |
| 115                  | 27.9         | 29.7 | 30.7  | 19.7  | 15.4 | 25                  |        |        |       |
| 125                  | 24.1         | 29.4 | 37.9  | 26.0  | 22.3 | 27                  |        |        |       |
| 135                  | 58.5         | 53.5 | 48.2  | 33.1  | 30.7 | 34                  |        |        |       |
| 145                  | 86.3         | 69.5 | 55.3  | 38.5  | 38.2 | 35                  |        |        |       |
| 155                  | 80.1         | 72.5 | 56.6  | 41.1  | 42.2 | 27                  |        |        |       |
| 165                  | 58.0         | 58.2 | 53.5  | 45.6  | 43.6 | 15                  |        |        |       |
| 175                  | 48.1         | 48.1 | 48.8  | 50.2  | 50.1 | 5                   |        |        |       |
| 180                  | 49.0         | 49.0 | 49.0  | 49.0  | 49.0 |                     |        |        |       |

# One-light Wall Bracket

Wall mounted • Damp location listed



## P710079-031-30

### Dimming Notes:

---

P710079 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Leviton SureSlide 6672

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYLV-600P

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.