


Benchmark®, Gas hob, 30", Stainless steel NGMP059UC

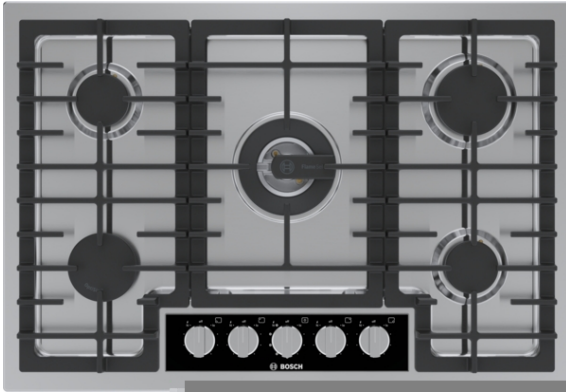

Included accessories

1 x nozzle set for liquid gas
1 x cast iron pan support

Optional accessories

HEZ298102 : Wok ring
HEZ9GR58UC : Griddle

- Seamless, One-Piece Stainless Steel Design Makes Clean-up Simple
- FlameSelect® - Allows for a Precise Adjustment of the Flame Size with Nine Defined Power Levels
- Continuous Grates Make Moving Heavy Pots Easier
- OptiSim® Burner - Simmer delicate sauces and melt chocolate without scorching
- Digital display indicates the power level selected and informs you of the burner's residual heat.

Technical Data

Product name/family : gas hob w integrated controls

Built-in / Free-standing : Built-in

Energy input : Gas

Total number of positions that can be used at the same time : 5

Type of control setting devices : sword knobs

Min. required niche size for installation (HxWxD) : 97 x 735-735 x 486-486 mm

Width of the appliance : 788 mm

Dimensions : 95.2 x 788 x 540 mm

Dimensions of the packed product (HxWxD) : 210 x 870 x 610 mm

Net weight : 10.9 kg

Gross weight : 21.0 kg

Residual heat indicator : yes

Location of control panel : Front

Basic surface material : Stainless steel

Color of surface : Stainless steel, Stainless steel

Color of frame : Stainless steel

Length electrical supply cord : 101.6 cm

Knob Material : Full metal

Sealed Burners : Yes

Type of pan support : Elongated cast iron pan support

Natural Gas Connection Rating : 43750 Btu

LP Gas Connection Rating : 43750 Btu

Power of heating element (kW) : 1 kW

Power of 1st burner : 3400 Btu

Power of 3rd heating element (kW) : 1.75 kW

Power of 3rd burner : 6000 Btu

Power of 5th heating element (kW) : 3 kW

Power of 5th burner : 10300 Btu

Connection Rating : 360 W

Gas connection rating : 12800 W

Fuse protection : 15 A

Voltage : 120 V

Frequency : 60 Hz

Universal Product Code : 825225972624

Energy input : Gas

Gas type : Natural gas 15 mbar (USA)

Alternative gas type : Liquid gas 27,5 mbar (USA)

Length of electrical supply cord (in) : 40"

Plug type : 120V-3 prong

Required cutout/niche size for installation (in) : 3 13/16" x 28 15/16" x 19 1/8"

Minimum distance from counter front (in) : 1 7/8"

Minimum distance from rear wall (in) : 3"

Appliance Dimensions (h x w x d) (in) : 3 13/16" x 31" x 21 1/4"

Dimensions of the packed product : 8 3/8" x 37 1/8" x 24 3/4"

Net weight : 24.000 lbs

Gross weight : 46.000 lbs

Total number of positions that can be used at the same time : 5

Length electrical supply cord : 101.6 cm

Min. required niche size for installation (HxWxD) : 97 x 735-735 x 486-486 mm

Dimensions : 95.2 x 788 x 540 mm

Dimensions of the packed product (HxWxD) : 210 x 870 x 610