



★★★★☆ **CARPET TILE**


L6071 REGENT

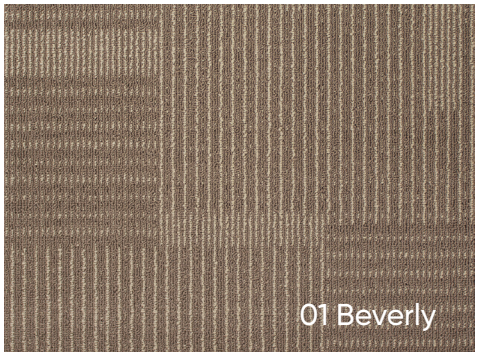


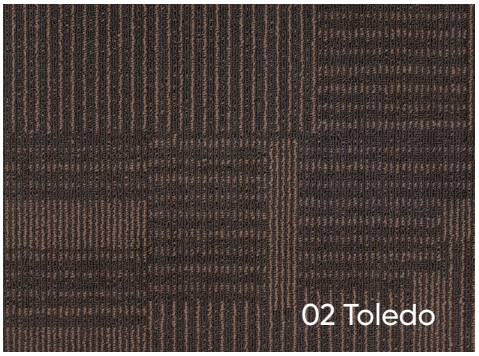

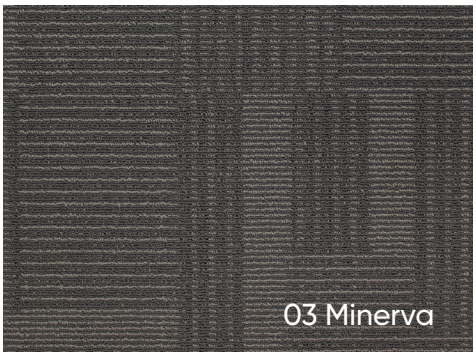

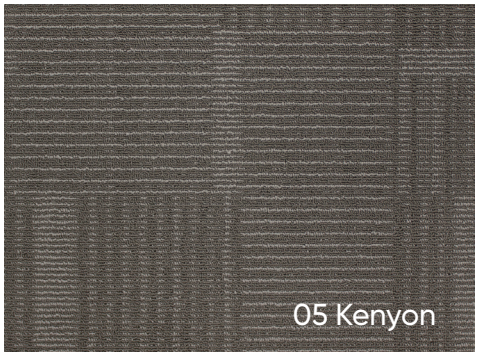

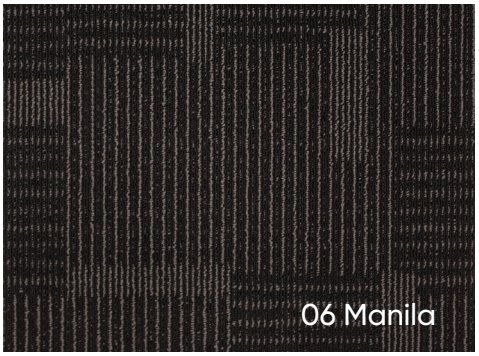

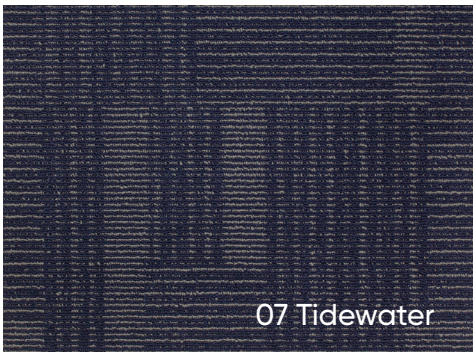

SPECIFICATIONS

Fiber System:	100% BCF Polypropylene	
Modular Size:	19.7" x 19.7"	50 cm x 50 cm
Backing System:	EuroBac™	
Construction:	Multi Level Scroll Loop	
Gauge:	1/12	47.2 rows/10 cm
Stitches:	10 s.p.i.	39 stitches/10 cm
Density:	6400	9.16 kilotex/cm^2
Pile Height:	0.12"	3 mm
Pile Weight:	18 oz./y^2	620 g/m2
Static generation:	3.0 kV or less (AATCC 134)	
Flammability:	ASTM E648 - Class I (direct glue) DOC FF 1-70 - passes	
Colorfastness to light:	5.0 (AATCC 16)	
CRI/CCI air quality test:	Green Label Plus	
Environmental:	Eligible for any recycling program	
Recycled Content:	EuroBac™ Modular backing - min. 20% pre-consumer	

CARTON CONFIGURATION

Pcs/Carton: 20 | 36 lbs/carton

Packaging: 53.82 sq.ft./carton | 32 cartons/pallet

Installation: Use any good quality pressure sensitive adhesive

WARRANTIES

10 Year Commercial Wear
10 Year Backing Performance
10 Year Stain Proof - No Exceptions™

INSTALLATION METHODS

Quarter-Turn

FEATURES

Wear Our carpet tile is guaranteed to withstand the wear and tear of daily life. Built to perform, Regent carpet tile offers strength from face fiber to secondary backing.

Backing Performance Regent carpet tiles are manufactured to provide dimensional stability and will not delaminate from face fiber or edge ravel. Our Backing Performance warranty guarantees that the backing on this product will not shrink, grow, cup or dome, which ensures easy installation and product longevity.

Polypropylene | 10 YEAR Backing Performance | 10 YEAR Commercial Wear | 10 YEAR Stain Proof | EuroBac™ | floor score by SCScertified

LOWES.COM

The natural characteristics of geometric or linear patterns in carpet tile can result in double-dark or double-light lines at the seam and to some degree a pattern run-off or bias. This is not a manufacturing defect. These characteristics should always be taken into consideration when choosing the installation method of a modular carpet. Product image colors may vary due to print processes and monitor display settings. To ensure that the installation meets the manufacturers requirements please note that a good quality pressure sensitive adhesive is recommended and required for this product. Failure to use this type of adhesive may void any warranty related claims. Please see installation instructions for full details. See Lowes.com for latest specifications.