Features
- Two-function pull-out sprayhead allows you to switch from aerated stream to Sweep® spray.
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean.
- DockNetik® magnetic docking system securely locks sprayhead into place when not in use.
- ProMotion® technology's light, quiet braided hose and ball-joint swivel make the pull-out sprayhead easier and more comfortable to use.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch spout offers vertical clearance for tall cookware and pitchers.
- Single lever handle makes adjusting water temperature easy.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- Box includes: Assembled faucet, supply lines, soap/lotion dispenser, and escutcheon plate.

Material
- Premium material construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.
- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use.

Installation
- Installs with 1-, 2-, 3-, or 4- hole sink (escutcheon plate included).
- Flexible supply lines and quick-connect fittings simplify installation.
- Longer shank works with countertops up to 2-1/2" (63.5 mm) thick and is easy to install.

Recommended Products/Accessories
K-23723 Faucet cleaner

| ADA | CSA B651 |

Codes/Standards
ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651

KOHLER® Faucet Lifetime Limited Warranty
See website for detailed warranty information.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
10-2-2022 21:30 - US

THE BOLD LOOK OF **KOHLER.**

4-5/8"
(117 mm)

8-13/16"
(224 mm)

13-5/8"
(346 mm)

10-1/2"
(267 mm)

3-13/16"
(97 mm)

3-1/2"
(89 mm)

2"
(51 mm)

90°

8-7/8"
(225 mm)

3-5/16"
(84 mm)

2-7/8"
(73 mm)

2-1/2"
(64 mm)

Ø 1-5/16"
(33 mm)

2-1/2"
(64 mm)
Max

Ø 1-1/16"
(27 mm)

2-1/2"
(64 mm)
Max

12-7/8"
(327 mm)

26-13/16"
(681 mm)

Ø 2-5/8"
(67 mm)

3/8" Threaded Connection
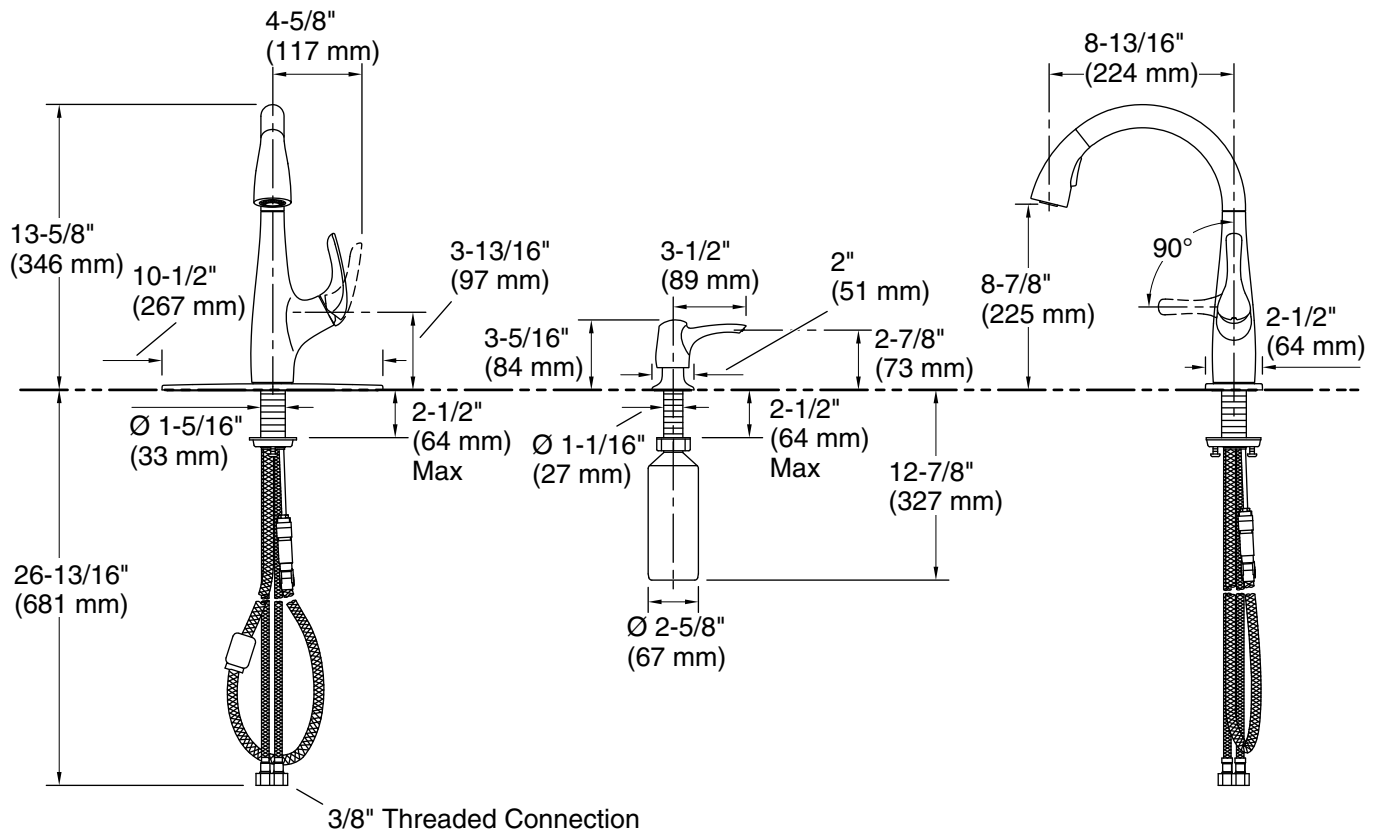
Technical Information
All product dimensions are nominal.

Drain included: No

Notes
Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
10-2-2022 21:30 - US

THE BOLD LOOK
OF KOHLER.