

Features


- Compression molded from our exclusive solid Vikrell® material
- 10-year consumer/3-year commercial limited warranty
- Tongue-and-groove 3-piece modular design allows for easy "snap together" installation
- Durable high-gloss finish
- Tile design
- Wall surround allows for attachment of grab bars
- 40-1/4" (102.2 cm) x 40-1/4" (102.2 cm) x 80-3/8" (204.2 cm) unit rough-in dimensions include flange
- 39" (99.1 cm) x 39" (99.1 cm) x 79-1/8" (201 cm) complete unit finished dimensions

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- HUD, UM Bulletin 73A
- NAHB Research Foundation, Inc.

39" NEO-ANGLE SHOWER BASE, SURROUND & BACKER BOARDS 72040106

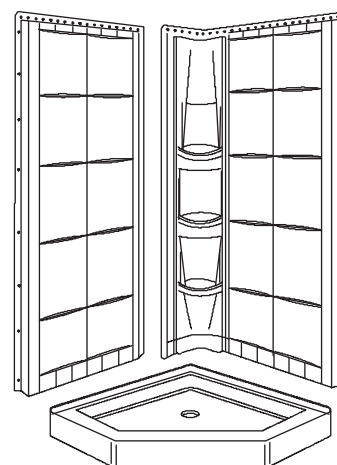

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
72040106	39" (99.1 cm) neo-angle shower base and wall surround with backer boards	☐ 0	☐ Other_____
Model	Component Description	Colors/Finishes	
72041100	39" (99.1 cm) neo-angle shower base only	☐ 0	☐ Other_____
Model	Wall Component Description	Colors/Finishes	
72044106	Complete wall set with backer boards	☐ 0	☐ Other_____

Technical Information

Model	door maximum width	door maximum height
72040106	15-7/8" (40.3 cm) x 27-3/8" (69.5 cm) x 15-7/8" (40.3 cm)	74" (188 cm)

Installation Notes

Install this product according to the installation guide.


Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for roofing nail installation.

Attach grab bars at the specified backer board locations only.

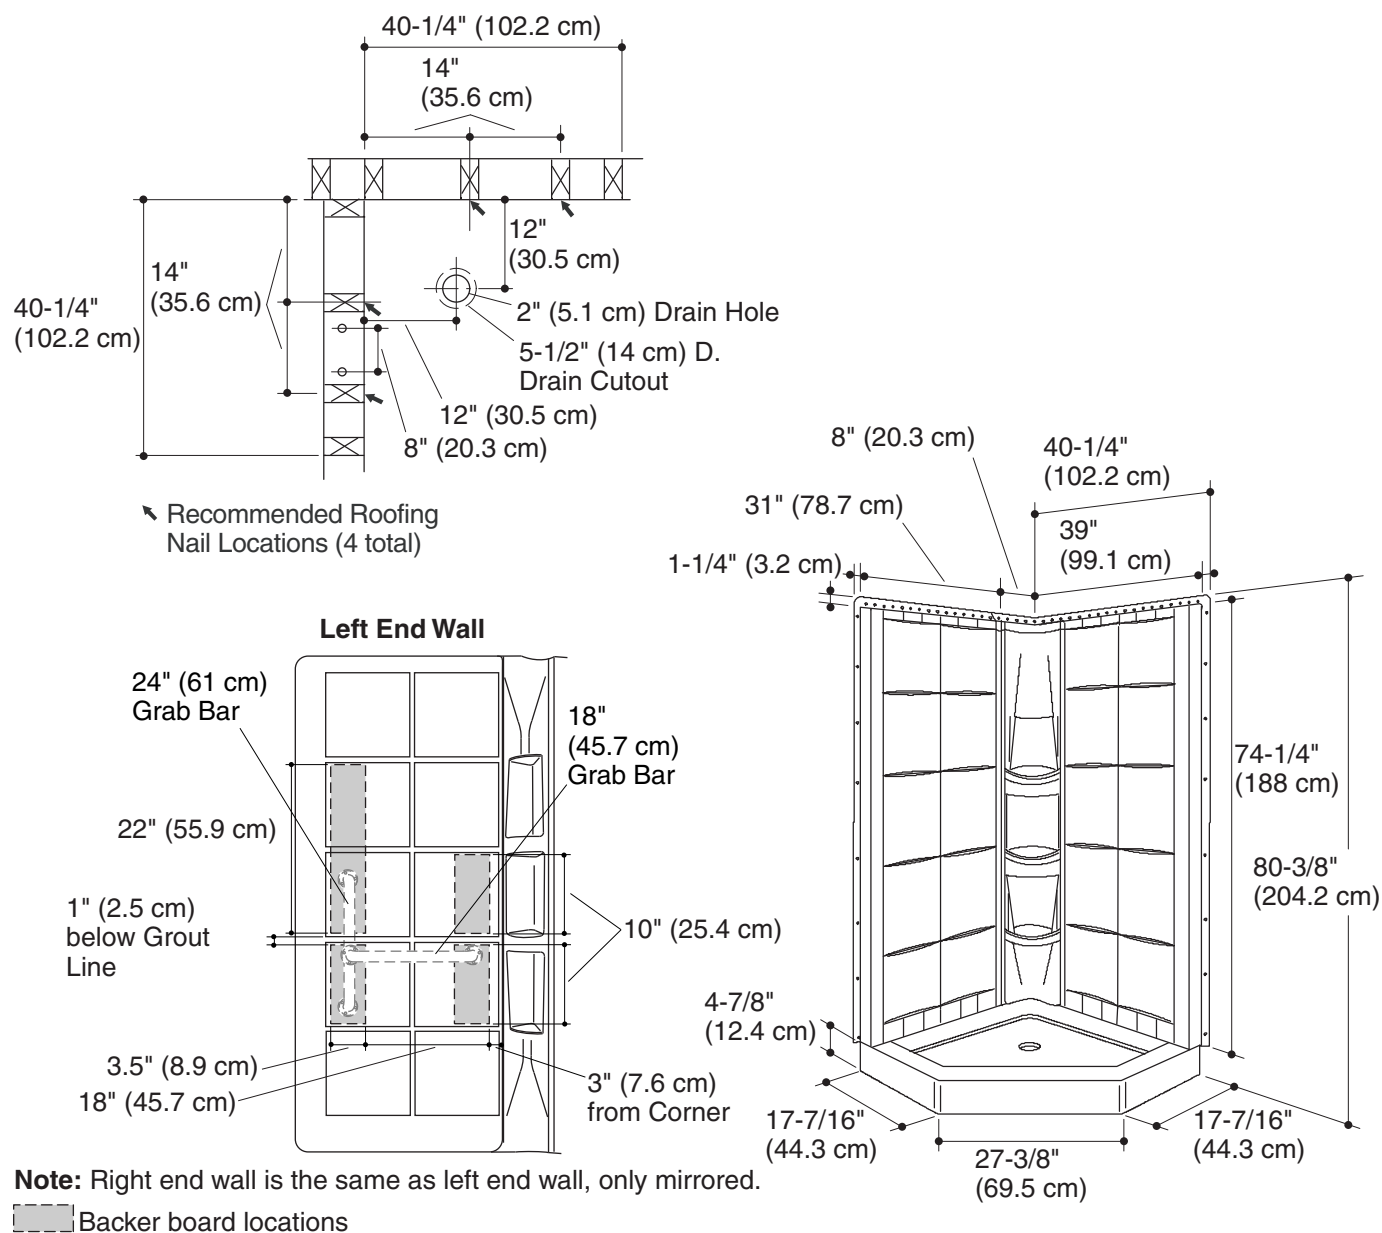

Product Diagram