

EVOLUTION™ 5' X 36"

Bathing design with form-fitted backrest and molded-in armrests

- 2771V (specify color)**
 - Acrylic with fiberglass reinforcement
 - Deep Soak Overflow Drain for maximum water depth
 - 1.4 HP self-draining pump/motor
 - Eight flow adjustable jets including:
 - Two adjustable Ideal Flow Comfort Jets™
 - Six adjustable Comfort Jets™
 - Two silent air volume controls
 - Side-mounted On/Off control
 - Complete factory installed and tested whirlpool system
 - Self leveling feet
 - Designed for undermount installation option

- 2771VC (specify color)**
 - Same as above with the EverClean™ whirlpool system featuring Antimicrobial AlphaSan®

- 2771VAC EverClean™ Air Spa**
 - Features Antimicrobial AlphaSan®
 - 1.25 HP single speed pump/motor
 - Side mounted air switch On/Off
 - Eight Comfort Air jet system
 - Quick connect EZ Install heater system (must order EZ Install heater separately)

- 2771VA Air Spa**
 - Same as 7236 VAC without Antimicrobial AlphaSan®

Nominal Dimensions:

60" x 36" x 19-3/4"
(1524 x 914 x 502mm)

**Compliance Certifications -
Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS




Components Required:

- Bath Filler*: (specify finish)
- Bath Drain: 1599.205.XXX (specify color)
- Five Foot Apron: 9261.019.XXX (specify color)
- E-Z-Install™ Whirlpool Heater - EZHEAT-100
- Tile Bead Kit: TILE-BEAD

* See American Standard Faucet Selector

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

NOTE: E-Z-Install™ Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

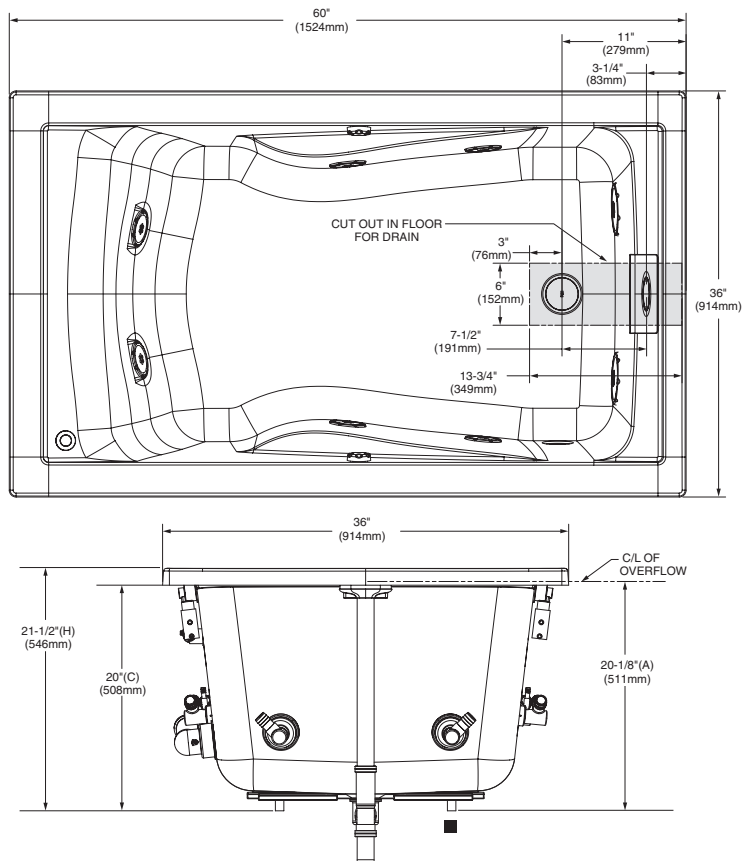

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1 AND A112.19.7.

GENERAL SPECIFICATIONS FOR 2771V WHIRLPOOL	
INSTALLED SIZE	60 x 36 x 21-1/2 In. (1524mm x 914 mm x 546mm)
WEIGHT	75 Lbs. (34 Kg.)
WEIGHT w/WATER	800 Lbs. (363 Kg.)
GAL. TO OVERFLOW	87 Gal. (329 L.)
MIN. OPERATING GAL.	50 Gal. (189 L.)
BATHING WELL AT SUMP	41-1/4 x 26-1/4 In. (1048mm x 667mm)
BATHING WELL AT RIM	52-1/2 x 30 In. (1334mm x 762mm)
WATER DEPTH TO OVERFLOW	18-1/2 In. (470mm)
FLOOR LOADING (PROJECTED AREA)	53 Lbs./Sq. Ft. (260 Kgs/Sq. m.)
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
PUMP	1.4 HP, 9.7 AMPS, 120V.

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

■ OPTIONAL 3 WALL TILING BEAD. KIT No. TILE-BEAD AND APRON No. 5FT-APRON AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.