



Seattle

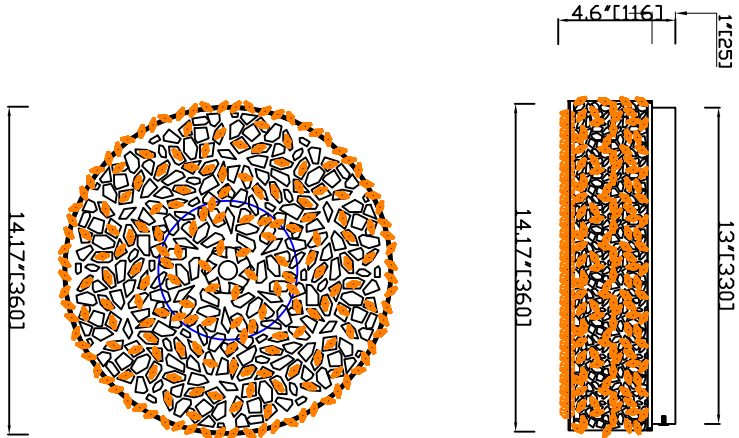

Seattle

- AA 2X BB 2X CC 2X DD 2X EE 2X FF 2X HH 3X

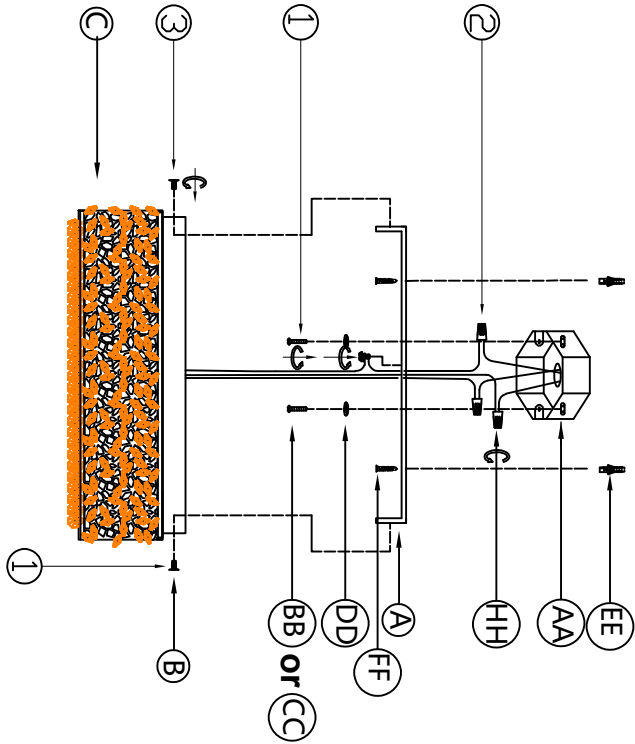

Installation steps:

1. Loosen screw B to remove mounting plate A from the lamp body, then secure mounting plate A to the junction box by rotating screw (BB or CC) through washer (DD).
2. Use (HH) to connect the lamp body's hot (live), neutral, and ground wires to the corresponding wires in the junction box.
3. Rotate B to attach lamp body C to mounting plate A.