

TOP FEATURES

5^{YR}
WARRANTY

COOL WHITE
3000K
KELVIN

CRI
90+
TRUECOLOR

LED
LENS

DAMP
RATED

IC
RATED

110°
BEAM
ANGLE

1100
LUMENS

15W
=100W POWER

120 VOLT

DIMMABLE
100-10%

DIE-CAST
ALUMINUM

INDOOR &
OUTDOOR

CERTIFICATIONS

SPECIFICATIONS

5/6 INCH LED | 30K

THIN DISK LIGHT | WHITE ROUND | RETROFIT OR SURFACE MOUNT

NW-R-DSK-6-15W-30K

The NUWATT thin led disk can be directly wired to a 4"/6" junction box which means they do not need a can. Directly install to the ceiling for instant bright light in your laundry room, kitchen, bedrooms, bathrooms, offices and more!

TECHNICAL SPECS



VOLTAGE	AC 120V
WATTAGE	15W
POWER FACTOR	>0.9
LUMENS	1100
CRI	90
EQUIVALENCY	75/100W
DIMMABLE	TRIAC DIMMING
BEAM ANGLE	110°
EFFICACY (LM/W)	67
COLOR TEMPERATURE	3000K
	(-4°F~104°F) -20~40°C
OPERATING TEMPERATURE	IP54
IP RATING	DAMP LOCATION
MOISTURE RATING	

LIFETIME PERFORMANCE

WARRANTY	5 YEAR WARRANTY
LIFETIME HOURS	50,000 HOURS

CONSTRUCTION

HOUSING MATERIAL	ALUMINUM
TRIM MATERIAL	DIE-CAST ALUMINUM
PRODUCT WEIGHT	0.12 KG
PRODUCT DIMENSIONS	7.37 IN. X 7.37 IN. X 1.3 IN.
LENS DIAMETER	Ø4.41 IN.
LENS MATERIAL	NON-YELLOWING ACRYLIC


DURABLE
BUTTERFLY
CLIPS

E26
RETROFIT
PLUG

TECHNICAL

5/6 INCH LED | 30K | THIN DISK LIGHT | WHITE ROUND | RETROFIT OR SURFACE MOUNT

NW-R-DSK-6-15W-30K



HEIGHT
1.3 IN
33 MM

EXTERIOR DIAMETER

Ø7.4 IN • Ø188 MM



**E26
PLUG**





LENS DIAMETER

Ø4.4 IN • Ø112 MM

110°

AVERAGE
BEAM ANGLE

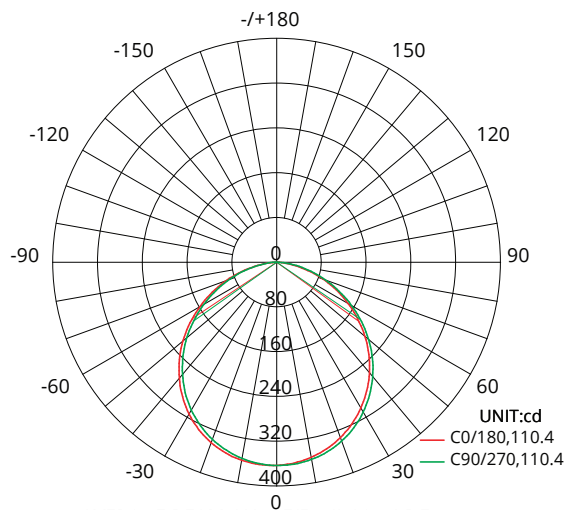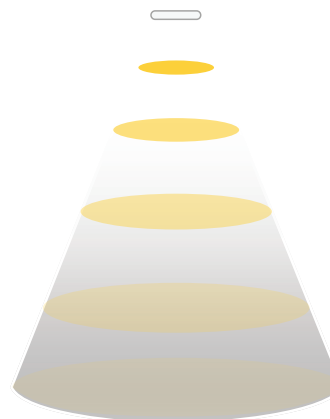

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

1100 LUMENS

IN STORE DISPLAY




GIFT BOX




6 PACK BOX



12 PACK BOX



END CAP



PALLET