
ORBIT SERIES VMCL004101A008BL



TYPE: PROJECT: CATALOG #: DATE:





SKU:	VMCL004101A008BL
FINISH:	BLACK
LUMEN OUTPUT:	502.01
INPUT VOLTAGE:	120V
COLOR TEMPERATURE:	3000K
CRI: 90	90
DIMMING:	ELV
POSITIONING:	ADJUSTABLE 90° AND ROTATABLE 350°
BEAM ANGLE:	36°
WATTAGE:	8 W
CUT OUT:	1.5" Dia.

FEATURES

- LED Adjustable surface mounted spotlight, ORBIT Series
- Aluminum body structure available in 2 finishes Black and White
- · Integrated AC LED fixture, surface mounted
- IC Rated
- OVERALL DIMENSIONS: 2.75" Diameter x 6.25"H
- BACKPLATE DIMENSIONS: 2.75" Diameter x 0.75"H
- LIGHT HEAD DIMENSIONS: 2" Diameter x 5"H
- HOLE SIZE: 1.5" Diameter
- LENS BEAM ANGLE: offered in 3 beam angles 15°, 24°, 36°
- ETL, cETL, Title 20 Compliant, Title 24 Compliant, Prop 65 Compliant, Energy Star Compliant
- 3 Year Limited Warranty
 - ***THE MEASUREMENTS ARE ROUNDED TO THE NEAREST 1/4"***

SAMPLE ORDERING SKU

ENVIRONMENT: DRY/IP20

MOUNTING: SURFACE

1	2	3	4	5	6
VMCL004101A008BL	08	BL	30K	B36	
1 - SKU	2 - WATTAGE	3 - FINISH	4 - COLOR TEMP.	5 - BEAM ANGLE	6 - OTHER OPTIONS
VMCL004101A	08 - 8 W	BL - Black	27K - 2700*	B15 -15°*	EMD - EMERGENCY DRIVER
		WH - White*	30K - 3000	B24 -24°*	EMC - EMERGENCY CIRCUIT
			35K - 3500*	B36 -36°	
			40K - 4000*		

NOTES

VONN, LLC.

3323 NE 163rd St. PH-706

RELATED PRODUCTS AVAILABLE:

VMCL004101A008WH VMCL004101B016BL VMDL004101A008BL VMDL004101A008WH

*ANY CUSTOM MODIFICATION WILL SUBJECT TO MINIMUM ORDER QUANTITY. (M.O.Q.)











PROJECT: TYPE: CATALOG #: DATE:

PHOTOMETRICS

30K - 3000 - STANDARD

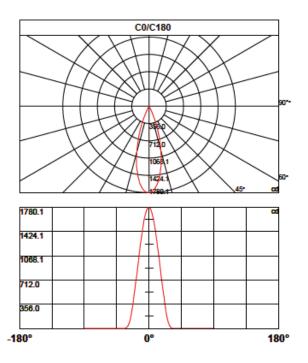

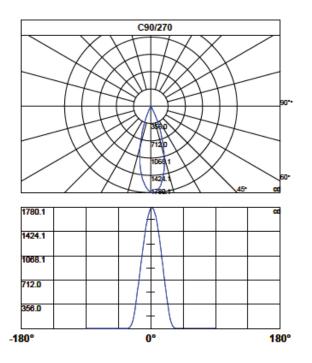

BEAM ANGLE

30K - 3000 - STANDARD

Lux-Distance Curve

