
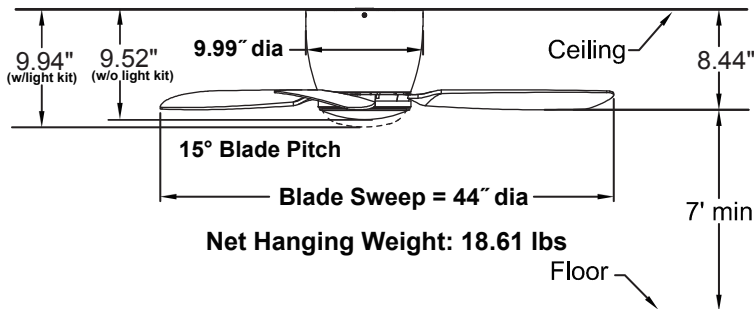


**EMBRACE 44™**

## FPS7981B\*\* Ceiling Fan

**Ceiling Bracket**  
**Width of the screw slot**



### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60Hz, 15 amp circuit.

### MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

### BLADE SET:

A set of three 19" composite blades is included.

### CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC1WH, WC2WH, WR500WH, WR501WH and CWRL4 wall controls, BTR9 and CRL4WH hand-held remote control and BTR9 and WFR50 WiFi receivers unit are available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

One 18-watt LED included.

### LOCATION USE:

Fan is rated for dry location only.

### Available Finishes

BN	Brushed Nickel with Brushed Nickel blades and Opal Frosted Glass / Steel Cap
BL	Black with Black blades and Opal Frosted Glass / Steel Cap
DZ	Dark Brone with Dark Brone blades and Opal Frosted Glass / Steel Cap
GR	Matte Greige with Matte Greige blades and Opal Frosted Glass / Steel Cap
MW	Matte White with Matte White blades and Opal Frosted Glass / Steel Cap

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	176	3950	88	0.37	45
Med	123	2835	117	0.27	24
Low	77	1786	167	0.18	11

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2935	8	97

### Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%