



Maximum weight capacity of **500 lbs** evenly distributed

Tall Storage Cabinet

Use & Care Guide

Read all instructions and warnings before proceeding. If you do not understand any portion of the instructions,

do not attempt assembly;

 $\mathsf{EMAIL}: \ \mathsf{customerservice} @kindred products.net \\$

Call: (866) 456-0866.

This Use & Care Guide Guide provides instructions on how to assemble and use your Everest[™] Tall Cabinet.

It is critical that the Cabinet be assembled correctly and according to the instructions.

The product is intended for use in working areas including offices, homes, craft rooms, garages, etc.

The product is intended to be placed on a level floor.

WARNING!

1. Strictly follow all instructions to avoid an accident, damage to property, personal injury, or death.

2. Do not sit, stand, or climb on cabinet and do not let children do so. Components might fail, causing a person to fall, possibly resulting in serious injury or death.

3. FOR CALIFORNIA RESIDENTS ONLY - WARNING: Cancer and reproductive harm. For full information, go to www.P65Warnings.ca.gov.

It is the consumer's responsibility to:

- Assemble this system in accordance with provided instructions
- Maximum weight capacity of 500 lbs evenly distributed
- \cdot Adjustable shelf supports up to 100 lbs
- \cdot Failure to follow warning could result in serious injury

Preparation

1. Find a soft surface for the assembly process to avoid any scratching (e.g. on top of a rug, a carpet, or the broken down shipping box).

2. One-person assembly is suggested or feel free to invite a friend or family member to help assemble and install.

You may need


- · Phillips Screwdriver
- Drill

Box Includes




UNPACKING AND ASSEMBLING YOUR PRODUCT SAFELY


When you receive your product, please proceed with caution during the unpacking process. The frame of the item is partially assembled, with sides that unfold both upwards and downwards. This is an integral part of the assembly mechanism designed for your convenience. To avoid any potential injury or damage to the product, gently remove the packaging material and carefully allow the frame to unfold as intended. Ensure that you have ample space to work with, avoiding any cramped or cluttered areas that may hinder the smooth expansion of the frame. If necessary, seek assistance to stabilize the components during this process.

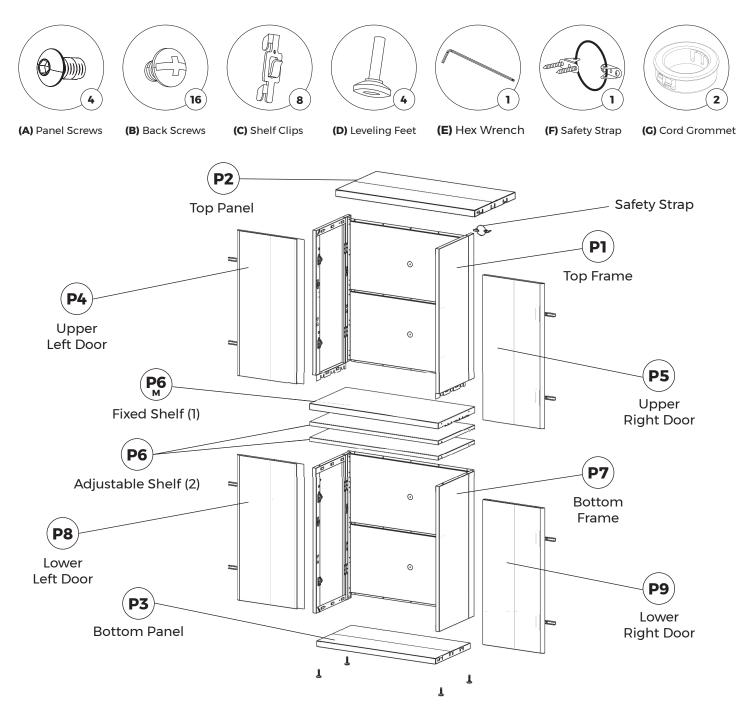


Remove both top and bottom frames **(P1, P7)** and lay on their backs on a protected surface with the sides facing up. Lift each side panel to an upright position.

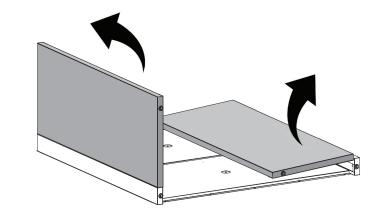


STEP 2

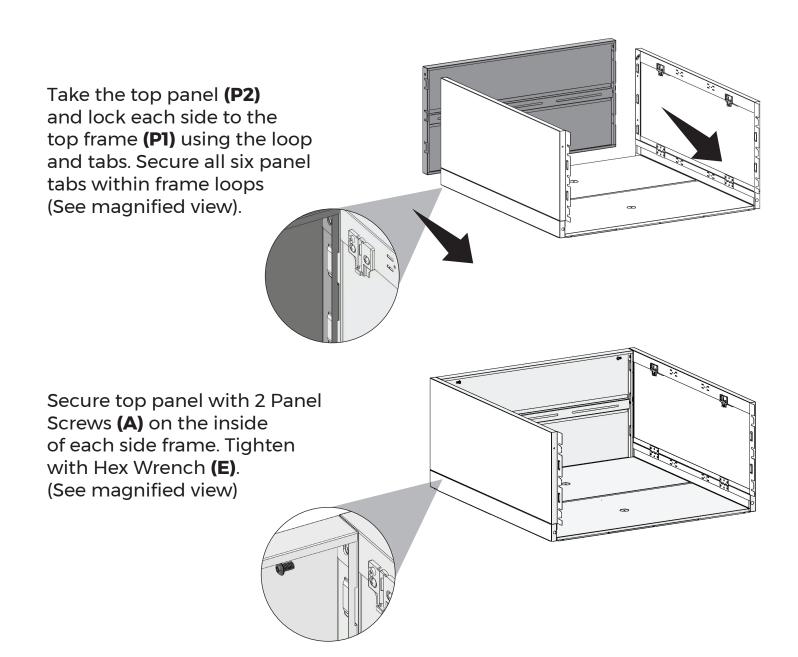

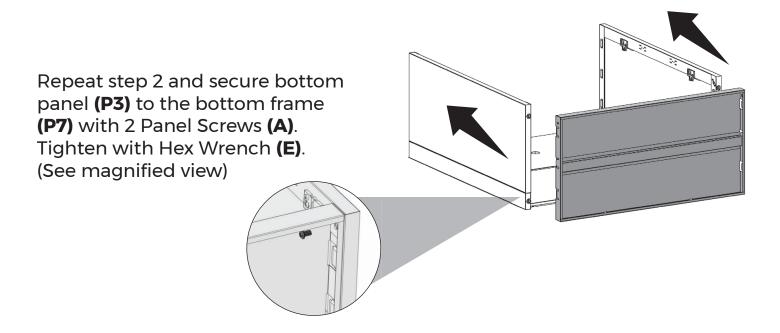

Install 4 leveling feet by screwing clockwise into the underside of the bottom panel **(P3)**.

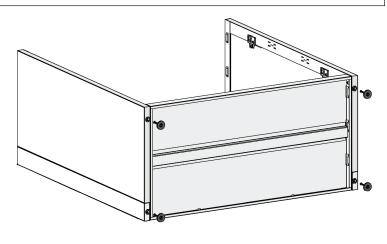

STEP 4


Connect and lock the top and bottom frames by using the loop and tabs for a secure fit, then secure each side with a back screw (B) on the inside of the frame (see magnified view).


Flip cabinet upright. Secure top and bottom panels to frame with 8 Back Screws (**B**) through the pilot holes (see magnified view).

STEP 5

STEP 6

Install the middle fixed shelf by inserting the loop and tabs. Secure all panel tabs with frame loops by pressing firmly in place.

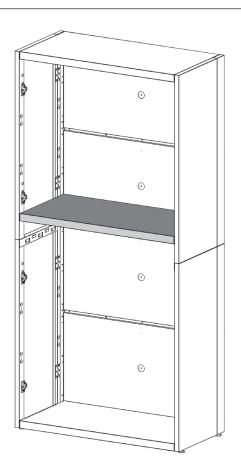


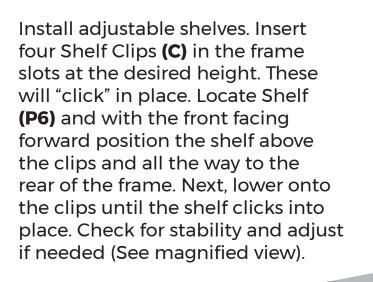

Hinges are already installed and can be quickly connected.

Locate the four doors top left **(P4)**, top right **(P5)**, lower left **(P8)**, and lower right **(P9)**. For all four door panels, extend the hinges in direction off the cabinet frame to attach. It is suggested to begin with the lower left and upper left doors, then attach the lower right and upper right doors.


The Tall Cabinet is designed for either a 2- or a 4-door opening option. To secure doors for a 2-door opening option, link the top door assemblies with the loop and tab to the bottom doors and secure each of them with a panel screw.

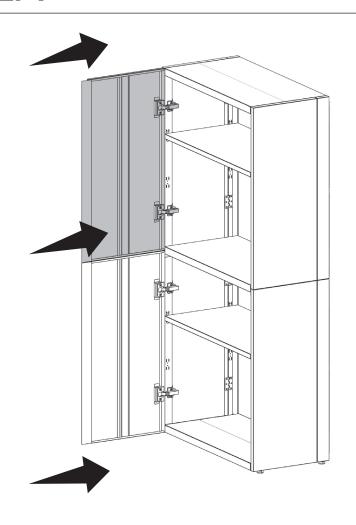


0

 \odot

 \odot




Align the hinge with the hinge plate.



1. Press the back part of the hinge to click into position.

2. To release the hinge, press the back release button.

The Tall Cabinet is designed for either a 2- or a 4-door opening option. To secure doors for a 2-door opening option, link the top door assemblies with the loop and tab to the bottom doors and secure each of them with a panel screw.

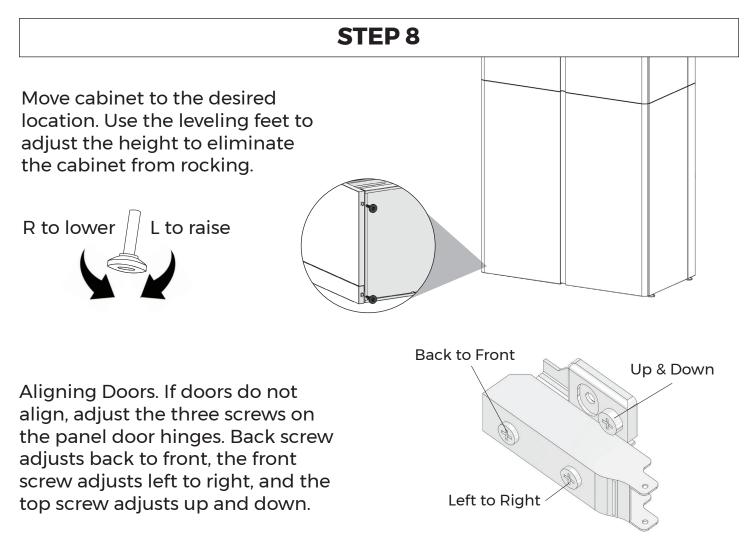

Install Safety Strap (F).

CLEANING

Wipe with soft cloth and a mild dish soap to keep cabinets clean. Dry immediately with a soft, clean cloth.

CONTACT INFORMATION

EVEREST WORLD HEADQUARTERS Kindred Products LLC 2460 M-139 Suite B Benton Harbor, MI 49022-6444

Mailing Address P.O. Box 827 Saint Joseph, MI 49085-0827

Customer Service Phone: (866) 456-0866 Email: customerservice@kindredproducts.net Website: www.Everesthome.com Scan for Warranty Information



Warning and Disclaimer: Kindred LLC Expressly disclaims all liability for personal injury, property damage or loss, whether direct, indirect, incidental, resulting from incorrect assembly, improper use, inadequate maintenance, or neglect. 2024 Kindred. All rights reserved.