

IN11222, IN11223, IN11224

INSTALLATION INSTRUCTIONS

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102
Phone: (706) 868-5451. Fax: (866) 816-6165
www.acclaim-lighting.com



Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION


1. Feed fixture wires and ground wire through rod (19), and fasten rod (19) to the connector (23).
2. Slide spacer (22), lid (21), and cap (20) through rod (19) and place tube (18) through rod (19). Put the cap (17) on the top of tube (18), and secure bottom loop (16) to the end of rod (19).
2. Attach mounting bar (6) to outlet box (1) with two machine screws (9).
4. Fasten one hex nut (8) from one end of nipple (10), then screw same end of nipple (10) into center hole in mounting bar (6). Fasten top loop (12) into one end of nipple (10).
5. Attach quick links (15) to the appropriate amount of chain.
6. Slide lock ring (13) and then canopy (11) down the chain (14). Open the quick link (15) at the other end and then hook onto top of chain (14), and hook the chain onto top loop (12) which has been mounted onto ceiling. Close the quick link (15).
7. Thread the wires through the loops (12 & 16) and chain (14).
8. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections.
 - Ribbed wire (w/o marking) or white wire from light to White wire (2) from power source.
 - Smooth wire (w/o marking) or black wire from light to Black wire (3) from power source.
 - Attach the ground wire (4) to mounting bar (7) with a ground screw (8).
9. Raise canopy (11) against ceiling and lock into position by screwing lock ring (13) onto top loop (12).
10. Remove the socket ring (28) from the socket (24), slide glass (26) and spacer (27) over socket (24) and using socket wrench (29), secure socket ring (28) onto socket (24).
11. Install bulbs: (bulbs not included)
(Don't exceed the maximum capacity recommended on the sockets).

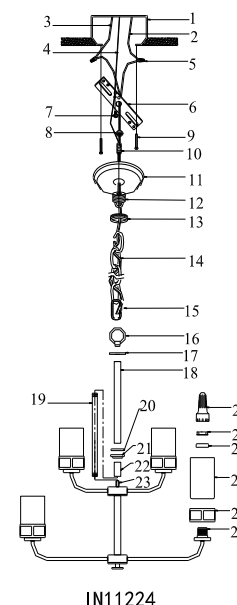

IN11224

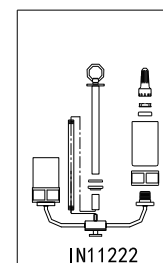

IN11222

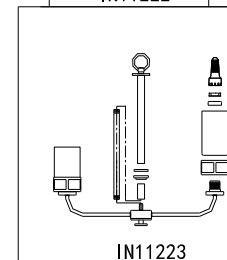

IN11223

1. OUTLET BOX
2. WHITE WIRE
3. BLACK WIRE
4. GROUND WIRE
5. WIRE CONNECTOR
6. MOUNTING BAR
7. GROUND SCREW
8. HEX NUT
9. MACHINE SCREW
10. NIPPLE
11. CANOPY
12. TOP LOOP
13. LOCK RING
14. CHAIN
15. QUICK LINK
16. BOTTOM LOOP
17. CAP
18. TUBE
19. ROD
20. CAP
21. LID
22. SPACER
23. CONNECTOR
24. SOCKET
25. FITTER
26. GLASS
27. SPACER
28. SOCKET RING
29. SOCKET WRENCH