



HOLDRITE®
CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONSSM

TESTRITE® DWV INLINE TESTING SYSTEM

SAFE · DRY · FAST

TESTRITE® Inline DWV Testing System meets Plumbing Code requirements and is rated up to 50 feet of head pressure / 22 PSI / 5 floors.

TESTRITE® is easy to install in all building types and helps keep contractors and job sites safe and dry.

TESTRITE® is designed for PVC, ABS, and cast iron DWV piping systems with 2", 3", 4", and 6" piping solutions.

TESTRITE® performs up to 5X faster than inflatable DWV testing devices.

TESTRITE® Test Wedge lasts at least 2X as long as Inflatable DWV testing devices.

PIPE MATERIAL SYSTEMS



The next generation of DWV testing is here.

Visit www.HOLDRITE.com to view TESTRITE® installation videos, technical information, and list pricing.

* TESTRITE® No-Hub Cast Iron Test Tee is black PVC material for use in markets permitting hybrid systems.

The TESTRITE® System

**TESTRITE®
Cleanout
Plug**

Cleanout
Cover Screw
Receiver

Ideal for
Horizontal
& Vertical
Testing


Performs
Up to 5X
Faster than
Traditional
Methods

**TESTRITE®
Test Wedge
with Valve**


(TRWV) Nothing to Inflate

Includes
Optional 3/4" male hose
threads and Fill/
Drain-Down Valve

Also available
without (TRW).

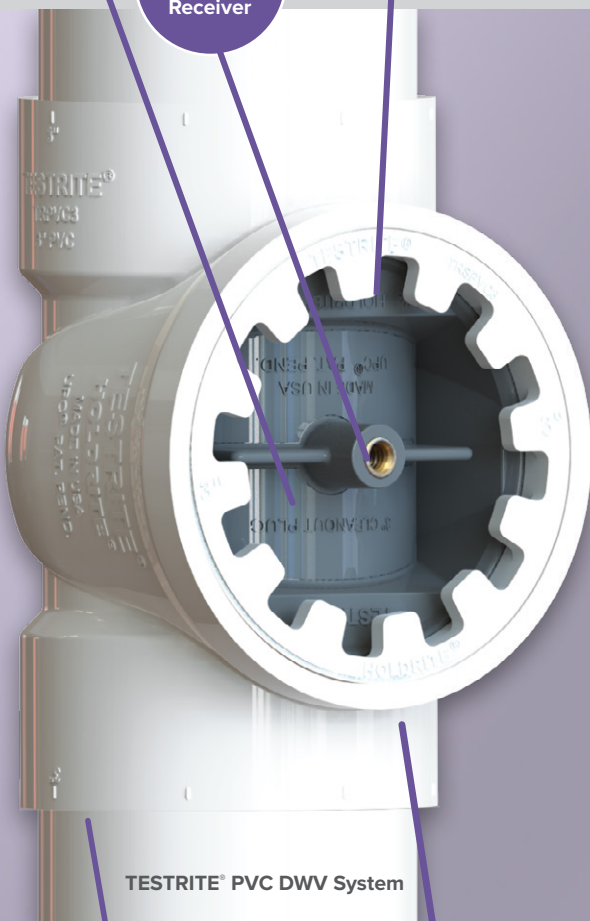

TESTRITE® PVC DWV System

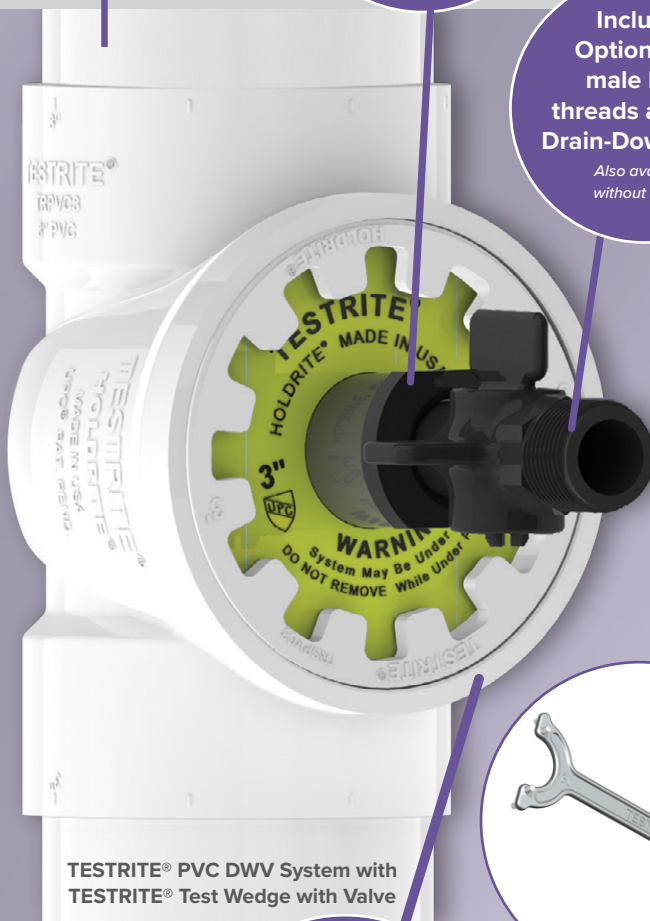

TESTRITE® PVC DWV System with
TESTRITE® Test Wedge with Valve

TESTRITE®
Test Tee

Provides
Permanent
Functional
Test/Cleanout
Port

**Recessed
Plug Fits in
Narrow
Walls**

vs.
standard
tees with
raised plugs

**TESTRITE®
Spanner Ring**

No thread sealant needed.

**Only 1 Tool
Needed!**

TESTRITE® Spanner Ring
Tool (TRT2-3, TRT4-6)



HOLDRITE®
CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS™



SAFE

- Meets Plumbing Code requirements
- Lab-tested and IAPMO (UPC/cUPC/IPC) listed
- Eliminates risks inherent with inflatable test devices
- Made in the USA



DRY

- Prevents water spillage and property damage
- Keeps installers dry
- Provides system fill-up or drain-down option at Test Tee
- Allows for simple re-test
- Conserves water
- Triple seal protection



FAST

- Performs up to 5X FASTER than traditional methods
- Eliminate the need for a multitude of tools
- Quick and easy to install
- Complete test in minutes



COST-EFFECTIVE

- Wedge is reusable
- More durable than inflatable test devices
- Provides at least 2X more uses than inflatable devices
- Get even more uses with available Seal Replacement Kits



VERSATILE

- Available for use with PVC, ABS, or cast iron piping systems
- 2", 3", 4" and 6" piping solutions
- Test Wedge available with or without fill/drain valve



TRW3V

TESTRITE® ADVANTAGES OVER INFLATABLE TEST DEVICES




TESTRITE®



Inflatable Device

	TESTRITE®	Inflatable Device
Safe, Dry, Fast, Versatile, and Cost-Effective	✓	✗
Effectively prevents property damage and mold by eliminating water spillage	✓	✗
Prevents installers from getting wet due to water spillage	✓	✗
Provides system fill-up or drain-down option at Test Tee location	✓	✗
Allows for simple re-test/partial test	✓	✗
Reduces costs by eliminating air pumps, compressors and thread sealants	✓	✗
Easy and fast to install	✓	✗
Requires only one tool	✓	✗
Durable	✓	✗
Replacement Seal Kit allows for even more uses	✓	✗
Provides at least 2X more DWV tests per device	✓	✗
Test water can be re-used, to avoid wasting potable water	✓	✗

TESTRITE® System Installation (base version without 3/4" threads or valve)

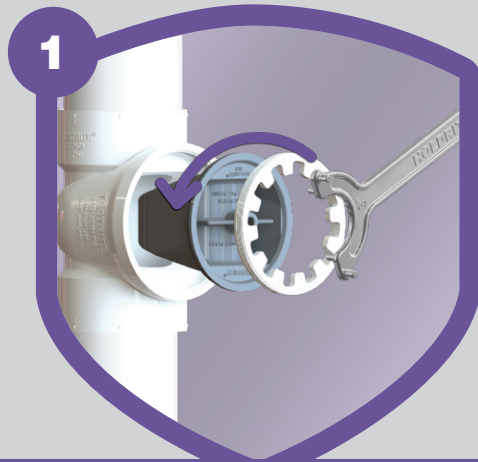

Remove the Cleanout Plug.



Insert Test Wedge and reinstall Spanner Ring, with the pressure arrow pointing up.




Turn the stem to the closed position, turning clockwise until tight. Perform test.***



Open stem by turning counter-clockwise. Drain system completely. Remove Test Wedge.***



Reinstall Cleanout Plug.

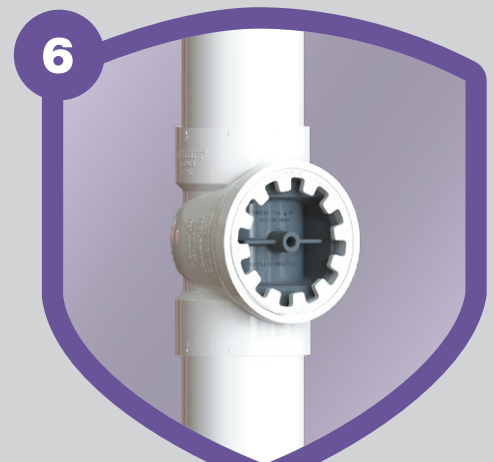

Test complete!

***WARNING: Avoid potential damage or injury - close Spanner Ring securely and DO NOT open while under pressure.

** Air Testing - Always comply with piping manufacturers' guidelines.

Testing non-metallic pipe systems or components with compressed air or gas can result in explosive failure, property damage, severe injury or death. Consult the guidelines of piping manufacturers prior to the use of pressurized air.**



HOLDRITE
CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS™

How to properly operate the TESTRITE® Test Wedge with Valve



Consider Pressure Direction

Always install Test Wedge with valve into the Test/Cleanout Tee with the pressure side up.



Wedge Fit

Always hand tighten (clockwise) the fill/drain stem into the Test Wedge until it is snug.



Fill Method 1

(Filling from Above)

Turn rotor valve to the closed position, then fill the pipe stack.



Fill Method 2

(Filling Through the Valve Stem)

Make sure the rotor valve is in the open position. Fill the pipe stack through the valve, then close the rotor valve.



Drain Method 1

(Releasing Water Down the Stack)

To release water down the stack following the test, rotate the fill/drain stem several full rotations counter-clockwise.



Drain Method 2

(Releasing Water Through the Valve Stem)

To relieve the test water through a hose, simply open the rotor valve and drain the water through the attached hose.

***WARNING: Avoid potential damage or injury - close Spanner Ring securely and DO NOT open while under pressure.

TESTRITE® System Products



TESTRITE® Test Wedge

- Compatible with TESTRITE PVC, ABS, and No-Hub Cast Iron Test/Cleanout Tees
- For use with TESTRITE Test/Cleanout Tee only

Part #	Size	Box Qty.	Case Qty.
TRW2	2"	1	10
TRW3	3"	1	10
TRW4	4"	1	10
TRW6	6"	1	5



TESTRITE® Test Wedge with Valve

- Compatible with TESTRITE PVC, ABS, and No-Hub Cast Iron Test/Cleanout Tees
- Included 3/4" male hose threads on the valve stem allow installer to fill and drain at the test port
- For use with TESTRITE Test/Cleanout Tee only

Part #	Size	Box Qty.	Case Qty.
TRW2V	2"	1	10
TRW3V	3"	1	10
TRW4V	4"	1	10
TRW6V	6"	1	5



TESTRITE® Cleanout Plug

- Compatible with TESTRITE PVC, ABS, and No-Hub Cast Iron Test/Cleanout Tees
- Ready to accept Cleanout Cover Screw
- For use with TESTRITE Test/Cleanout Tee only
- No thread sealant needed

Part #	Size	Box Qty.	Case Qty.
TRC2	2"	1	10
TRC3	3"	1	10
TRC4	4"	1	10
TRC6	6"	1	6

*Suffix "-B" added to the model number provides a 1/4" - 20 female brass thread for cleanout cover screw.



TESTRITE® Spanner Ring Tools

- Nickel-plated
- Ideal for new construction

Part #	Size	Box Qty.
TRT2-3	2" - 3"	1
TRT4-6	4" - 6"	1



TESTRITE® Service Wrench

- Chrome-plated steel
- Fits 2" - 6"
- Adjustable for recessed and/or tight in-wall locations
- Ideal for service and repair

Part #	Size	Box Qty.
TRTSR	2" - 6"	1



TESTRITE® PVC DWV Test/Cleanout Tee with Plug

- PVC Test/Cleanout Tee, Spanner Ring and Cleanout Plug

Part #	Size	Box Qty.
TRPVC2A	2"	10
TRPVC3A	3"	10
TRPVC4A	4"	10
TRPVC6A	6"	6

*Suffix "-B" added to the model number provides a 1/4" - 20 female brass thread for cleanout cover screw.



TESTRITE® PVC DWV Test/Cleanout Tee

- For use with TESTRITE PVC Test/Cleanout Tee Only

Part #	Size	Box Qty.
TRPVC2	2"	10
TRPVC3	3"	10
TRPVC4	4"	10
TRPVC6	6"	6



TESTRITE® PVC Spanner Ring

- For use with TESTRITE PVC Test/Cleanout Tees only

Part #	Size	Box Qty.
TRSPVC2	2"	10
TRSPVC3	3"	10
TRSPVC4	4"	10
TRSPVC6	6"	6



Female Hose x Hose Adapter

- Hose swivel adapter made from high quality brass
- Dual female garden hose standard thread connections
- Includes hose washers

Part #	Size	Box Qty.
TRBHS	3/4" FHT x 3/4" FHT	1



TESTRITE® Test Wedge Seal Replacement Kit

- Replacement kit for TESTRITE Test Wedge
- Three seals per kit

Part #	Size	Bag Qty.
TRR2	2"	1 kit
TRR3	3"	1 kit
TRR4	4"	1 kit
TRR6	6"	1 kit



HOLDRITE
CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS™

For ABS Piping Systems



TESTRITE® ABS DWV Test/Cleanout Tee with Plug

- ABS Test/Cleanout Tee, Spanner Ring and Cleanout Plug

Part #	Size	Box Qty.
TRABS2A	2"	10
TRABS3A	3"	10
TRABS4A	4"	10

*Suffix "-B" added to the model number provides a 1/4" - 20 female brass thread for cleanout cover screw.



TESTRITE® ABS DWV Test/Cleanout Tee

- ABS Test/Cleanout Tee


Part #	Size	Box Qty.
TRABS2	2"	10
TRABS3	3"	10
TRABS4	4"	10



TESTRITE® ABS Spanner Ring

- For use with TESTRITE ABS Test/Cleanout tee only

Part #	Size	Box Qty.
TRSABS2	2"	10
TRSABS3	3"	10
TRSABS4	4"	10

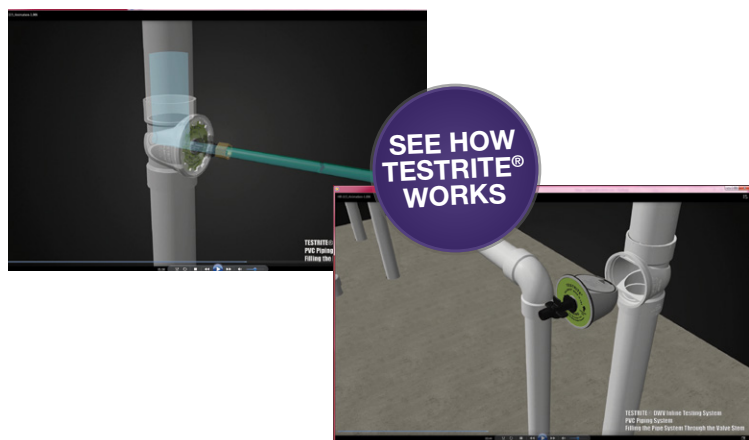

For No-Hub Cast Iron Piping Systems



TESTRITE® No-Hub Cast Iron DWV Test/Cleanout Tee with Plug

- Black PVC Test/Cleanout Tee, black Spanner Ring and Cleanout Plug for no-hub cast iron piping systems
- Designed for markets that allow combined plastic and cast iron piping (hybrid systems) UL fire-ratings available
- Install with standard no-hub couplings
- As quiet as cast iron tees - third-party lab tested

Part #	Size	Box Qty.
TRPVCNH2A	2"	10
TRPVCNH3A	3"	10
TRPVCNH4A	4"	10
TRPVCNH6A	6"	6

*Suffix "-B" added to the model number provides a 1/4" - 20 female brass thread for cleanout cover screw.



TESTRITE® No-Hub Cast Iron DWV Test/Cleanout Tee

- Black PVC Test/Cleanout Tee for no-hub cast iron piping systems
- Designed for markets that allow combined plastic and cast iron piping (hybrid systems) UL fire-ratings available
- Install with standard no-hub couplings
- As quiet as cast iron tees - third-party lab tested

Part #	Size	Box Qty.
TRPVCNH2	2"	10
TRPVCNH3	3"	10
TRPVCNH4	4"	10
TRPVCNH6	6"	6



TESTRITE® No-Hub Cast Iron Spanner Ring

- Black PVC Spanner Ring for no-hub cast iron piping systems
- Designed for markets that allow combined plastic and cast iron piping (hybrid systems)
- For use with TESTRITE black PVC Test/Cleanout tee only

Part #	Size	Box Qty.
TRSPVCNH2	2"	10
TRSPVCNH3	3"	10
TRSPVCNH4	4"	10
TRSPVCNH6	6"	6



www.HOLDRITE.com/videos



Phone: 1 (800) 321-0316
sales@HOLDRITE.com
www.HOLDRITE.com



TEST TEE	COMPLIES WITH ASTM STANDARD
PVC	D2665
ABS	D2661
NO-HUB	A888

Meets CSA B181.1 (ABS) and B181.2 (PVC).

© HOLDRITE 2017. All rights reserved. #LT68 5/17