




Installation Instructions

TOOLS REQUIRED

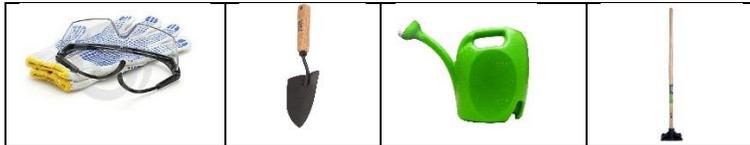

Gloves/Goggles Hand Shovel Watering Can Tamp

PRODUCT DESCRIPTION & COVERAGE

Super Seal® Quick Patch H2O™ is a water activated, fast setting asphalt patch that gives a permanent result. Quick Patch H2O™ utilizes the latest technologies to deliver a VOC friendly patch that cures quickly and leaves a solid black, texturized finish. Traffic ready in 1 hour. Quick Patch H2O's formulation allows it to be applied without sidewalls and is perfect for driveway and parking lot minor depressions, berms, edges, aprons and of course, potholes. It even works on concrete. Product can be applied in most weather temperatures including warm temperatures as well as cold, damp weather.

Coverage Rate: Each 20 lb. pail will yield approximately .25 cubic ft. when compacted properly and will cover an area of approximately 2.75 sq. ft. when placed at a thickness of 1 inch.

INSTALLATION INSTRUCTIONS

Wear gloves and goggles prior to starting project. Remove all loose material from repair including any standing water. Sweep area thoroughly. If temperatures are below freezing make sure to remove ice. Open container and remove bag from pail (do not open bag yet). Work the bag back and forth for a minute or so to help loosen the material. Open the bag and pour the product into the pail. Using a hand shovel, scoop patch material into repair. Level material with back of shovel, trowel, or rake and allow material to stand approximately 1/2" above repair area. Using a watering can, lightly pour / sprinkle repair with water and allow water to fully enter repair. Using a tamper fully compact the repair. You can use a cinder block or any heavy, blunt object. If repair is deeper than 3" we recommend doing a repair in two lifts.

PRECAUTIONS

- Apply Quick Patch H2O at a depth of ¾ - 4 inches (20-100mm). Apply in 2 inch (50mm) lifts /layers so that you are able to fully compact each layer.
- Avoid getting product on hands and clothing.
- When applied in hot conditions do not turn your car tires on fresh repair during first few hours. Turn while moving.
- For sealer application allow 24 hours to cure prior to sealing.

WARRANTY

Dalton Enterprises, Inc. warrants this product to be of merchantable quality when applied in accordance with the stated instructions. This product is not warranted as suitable for any other purpose other than the stated purposes on the packaging copy. Liability under this warranty is limited to the replacement of the product if found to be defective or, at Dalton's option, to refund the purchase price. No warranty will apply if product was altered in a manner that is not consistent with the instructions. There are no express warranties which extend beyond the description on the face hereof, manufacturer disclaims any implied warranties. This warranty does not include labor costs incurred for the application, re-application or consequential damage costs. This warranty gives you specific rights and you may also have other rights which vary from state to state. Original proof of purchase required for all warranty claims. Please email info@super-seal.us or call 800-851-5606 and a customer service representative will send you a form.

**Dalton Enterprises, Inc. • 131 Willow Street
Cheshire, CT 06410, USA
Phone 800-851-5606 • Fax 203-271-3396
info@super-seal.us www.super-seal.us**