
# FIREPLACE TV STAND FP3

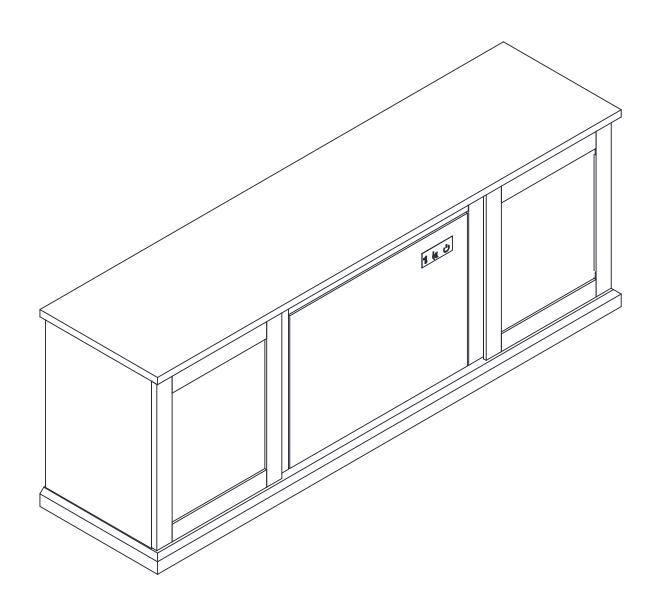

# Table of Contents

# Assembly Tools Required

Part Identification	3	N ODIN C L
Hardware Identification	4	No. 2 Phillips Screwdriver Tip Shown Actual Size
Assembly Steps	5-19	
		Hammer Not actual size 😀

Page 2 FP3


### Part Identification



• While not all parts are labeled, some of the parts will have a label or an inked letter on the edge to help distinguish similar parts from each other. Use this part identification to help identify similar parts.


Α	TOP (1)
В	BOTTOM (1)
С	LEFT END (1)
D	RIGHT END (1)
Е	LEFT UPRIGHT (1)
F	RIGHT UPRIGHT (1)

G	ADJUSTABLE SHELF (2)
Н	BACK (2)
J	LEFT MOLDING (1)
K	RIGHT MOLDING (1)
L	TOP MOLDING (1)
Ν	DOOR (2)
0	MIDDLE SHELF (1)

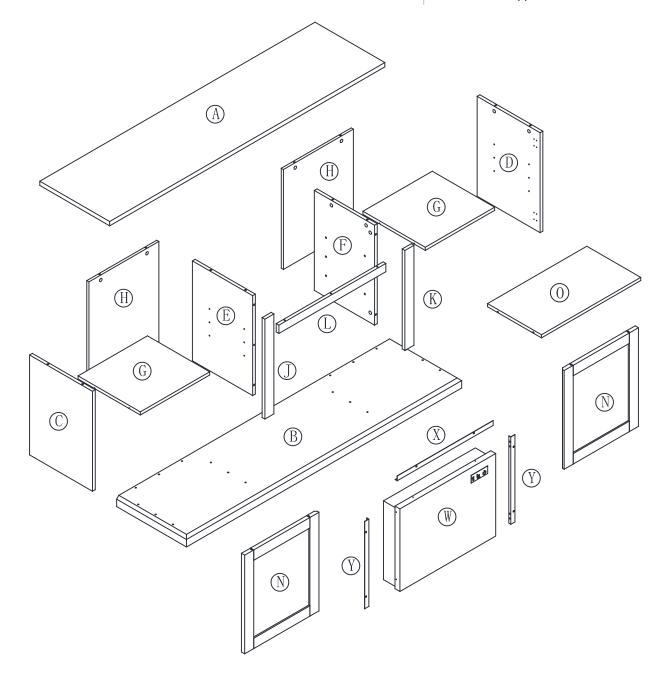

#### Hardware Identification


Screws are shown actual size. You may receive extra hardware with your unit.














4 APPLIQUE CARD- 4




(5) METAL PIN- 12



(6) HINGE-4



7 BUMPER CARD- 1












(10) 1/2" FIAT HEAD SCREW-24















(Refer to the last step for proper location and application)


Page 4

## Hardware Usage Guide


#### HOW TO USE A HIDDEN CAM & CAM SCREW OR CAM DOWEL

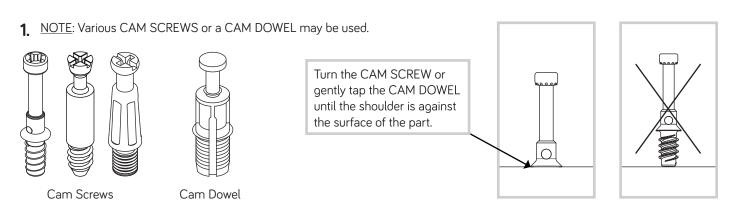

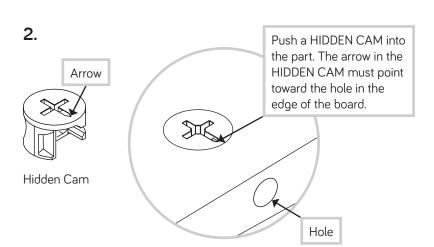




- Assemble your unit on a carpeted floor or on the empty carton to avoid scratching your unit or the floor.
- ◆ Turn sixteen CAM SCREWS (1) into the TOP (A) and MOLDINGS (J and K).

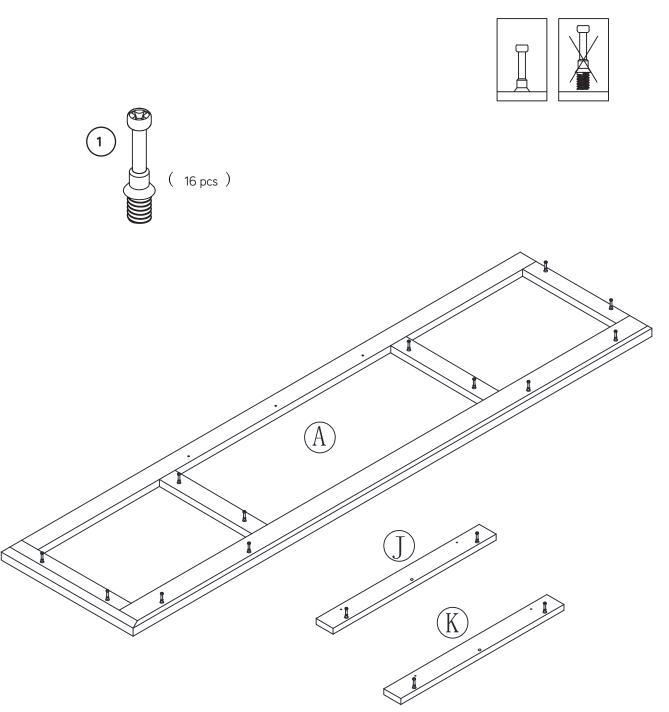

Page 6 FP3


Push sixteen HIDDEN CAMS (2) into the BACK (H), ENDS (C and D) and UPRIGHTS (E and F).

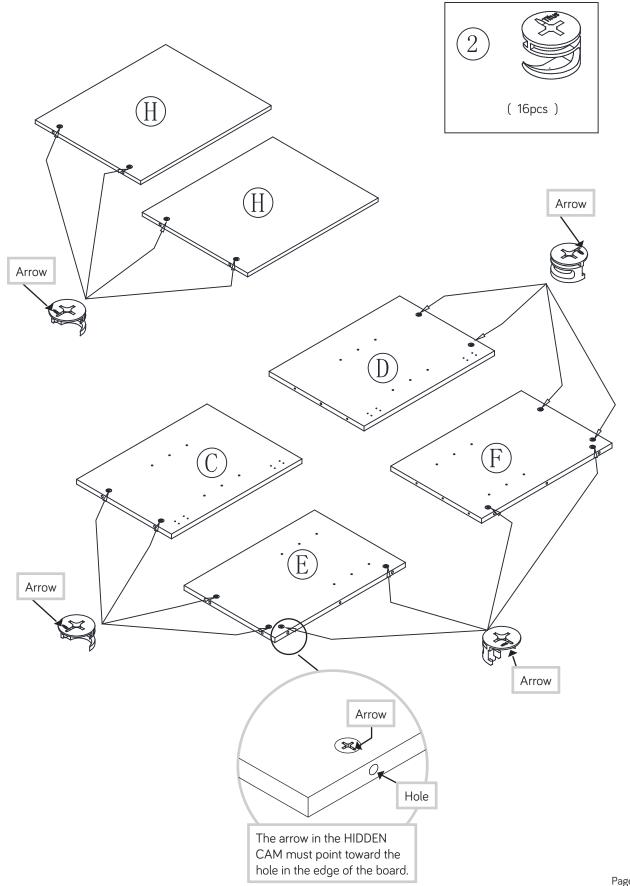


FP3

Fasten the TOP MOLDING (L) to the TOP (A).


 Use three BLACK 1-3/4"PAN HEAD SCREWS through the MOLDING and align to the holes in the top before you fasten.




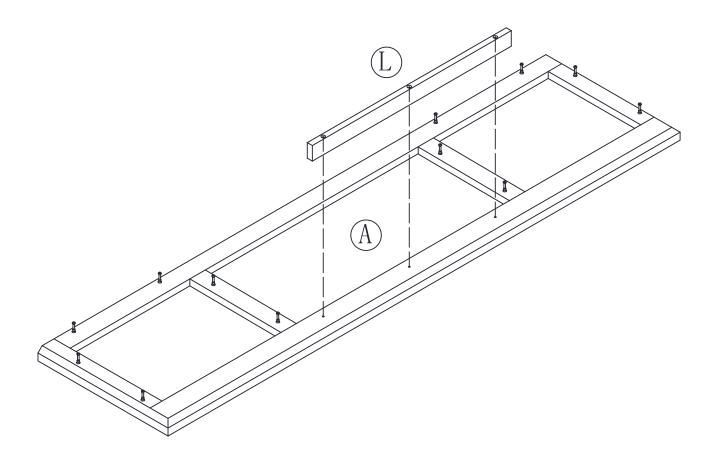


Page 8 FP3

- Push the WOOD DOWELS (3) into the exact hole shown in the UPRIGHTS (E and F).
- Fasten the MOLDINGS (J and K) to the UPRIGHTS (E and F). Tighten four HIDDEN CAMS

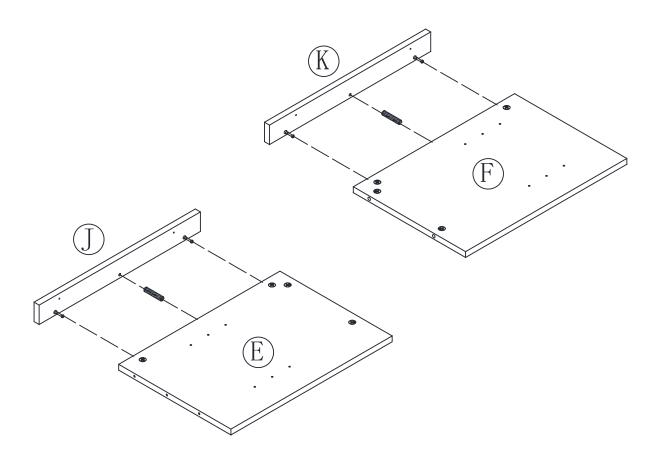




Fasten the UPRIGHTS (E and F) to the TOP (A). Tighten four HIDDEN CAMS.

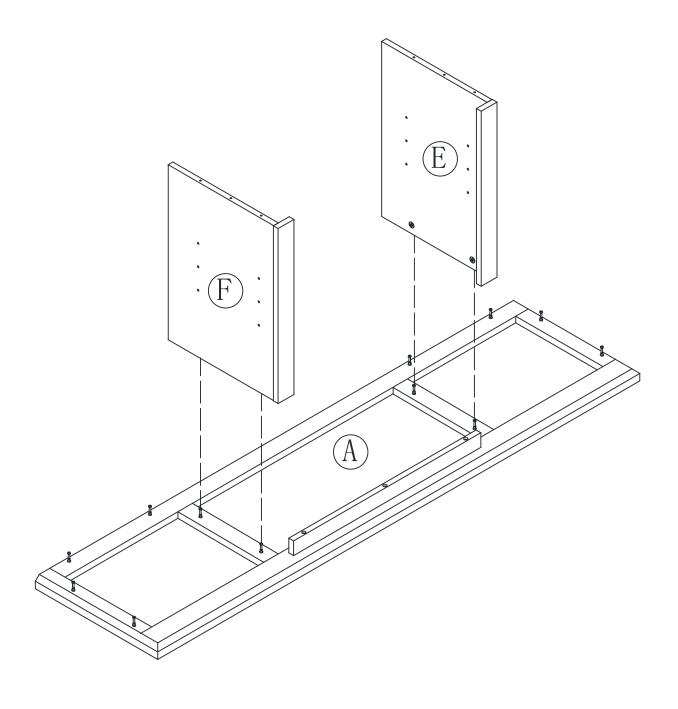


Page 10 FP3

◆ Fasten the BACKS (H) to the TOP (A). Tighten four HIDDEN CAMS.

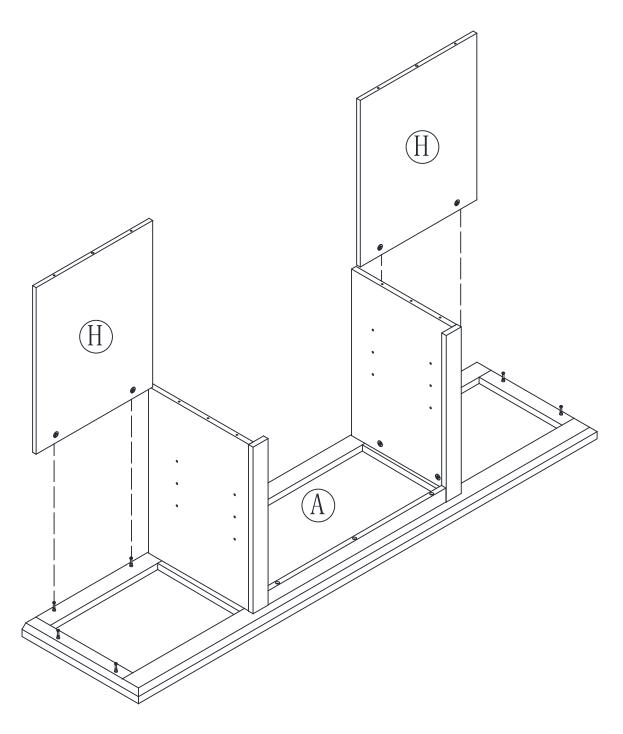

◆ Fasten the ENDS (C and D) to the TOP (A). Tighten four HIDDEN CAMS.

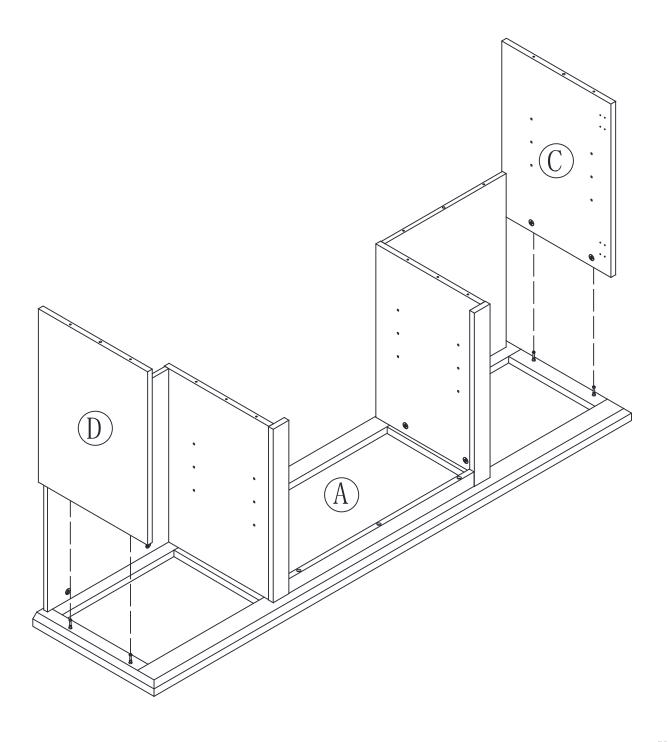


Page 12 FP3


- Push the WOOD DOWELS (3) into the exact hole shown in the ENDS (C and D), BACKS (H) and UPRIGHTS (E and F).
- Fasten the BOTTOM (B) to the ENDS (C and D), UPRIGHTS (E and F) and the BACKS(H). Use twelve BLACK 2-3/8" PAN HEAD SCREWS (8).


NOTE: You should align each SCREW to the holes before completely tightening any of them.CAMS.



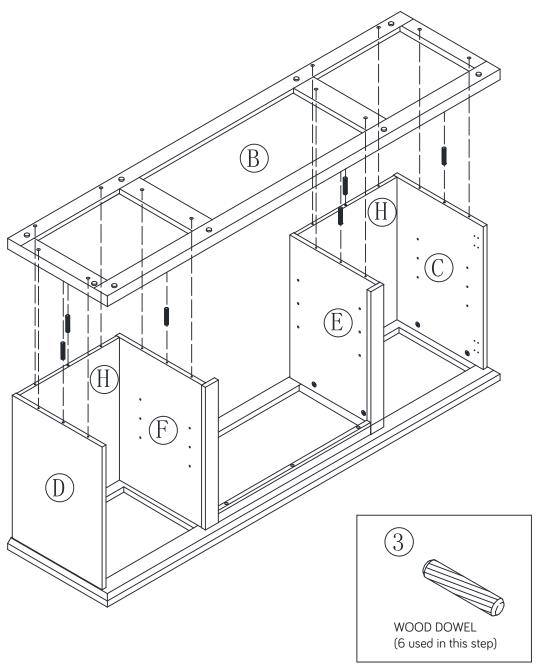


- Insert the METAL PINS (7) into the hole locations of your choice in the ENDS (D and C) and UPRIGHTS (F and E).
- ♦ Set the ADJUSTABLE SHELVES (G) onto the METAL PINS.BE is positioned as shown.

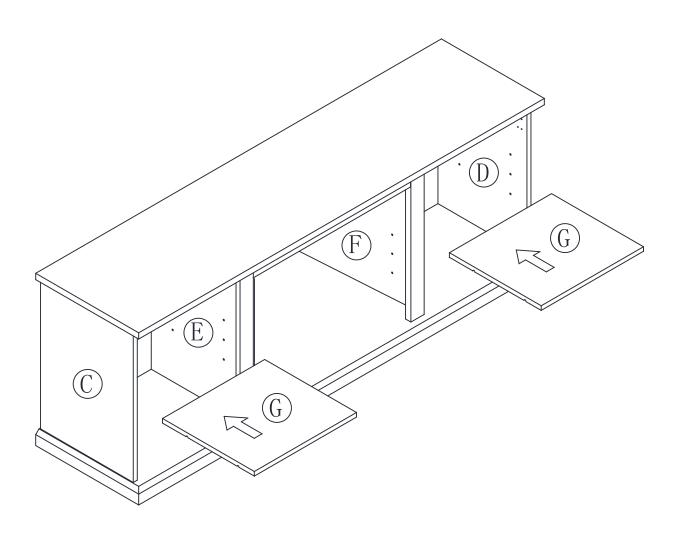




Page 14 FP3

- Fasten four HINGES (6) to a DOOR (N). Use eight 1/2" FLAT HEAD SCREWS (10).
- Repeat this step for the remaining DOOR (N).

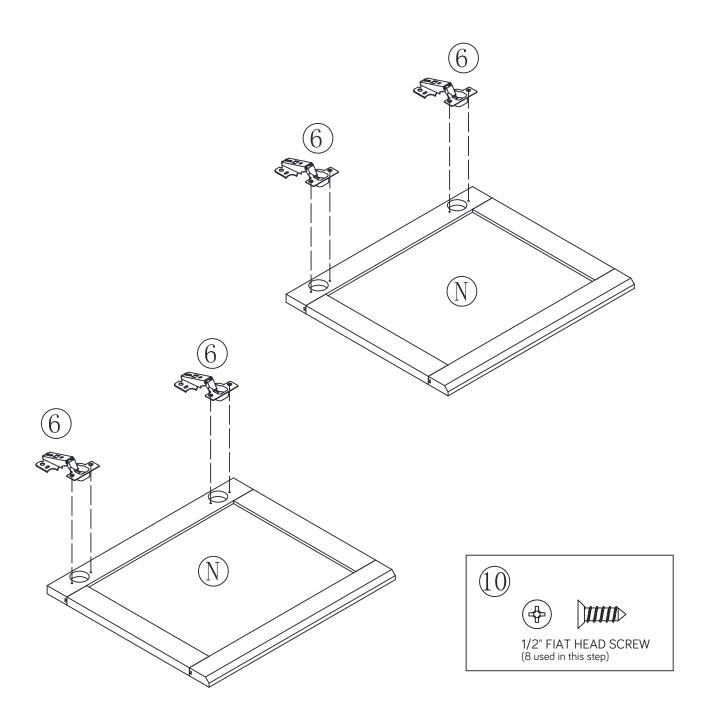

- Before fastening the DOORS to your unit, be sure themounting screw is
- against the stops as shown in theright diagram. If it isn't, loosen the adjusting screw andmounting screw to slide it against the stops.
   Then tightenthe mounting screw.
- Fasten the DOORS (N) to the ENDS (C and D).
- ◆ Use sixteen 1/2" FLAT HEAD SCREWS (10).Peel two BUMPERS from the BUMPER CARD (7) and stick them onto the SHELVES (D) in the locations shown.

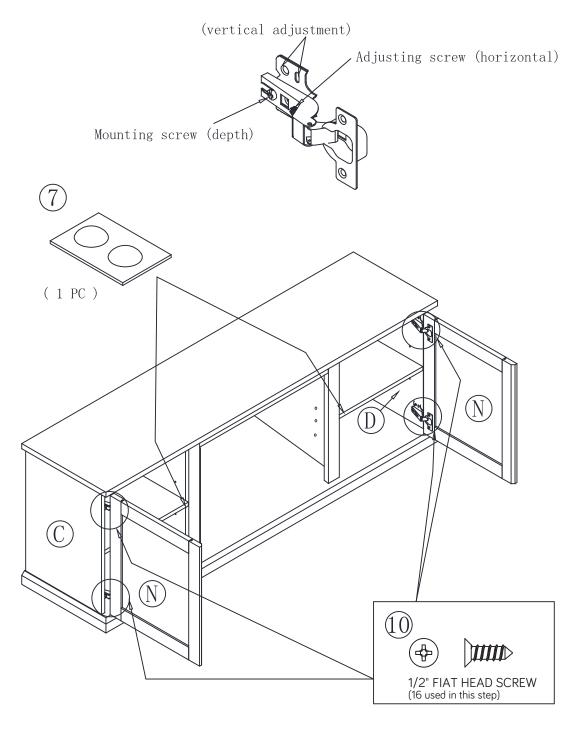



Page 16 FP3

Please go to step 13 if you want to put the middle shelf (O) as show in diagram #1 or go to step 15 if you want to put the insert as show in diagram #2.




# Diagram #2

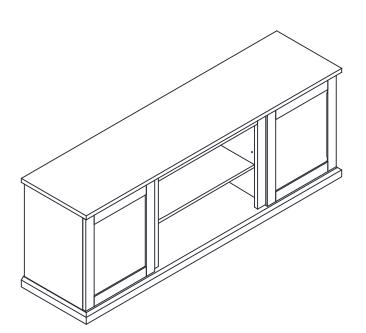

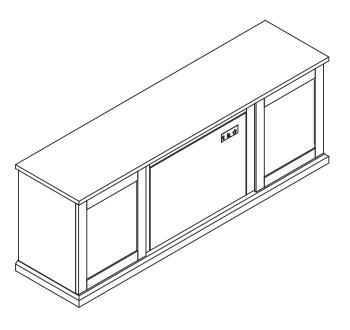


- Insert the METAL PINS (5) into the hole locations of your choice in the UPRIGHTS (E and F).
- ◆ Set the ADJUSTABLE SHELF (O) onto the METAL PINS.

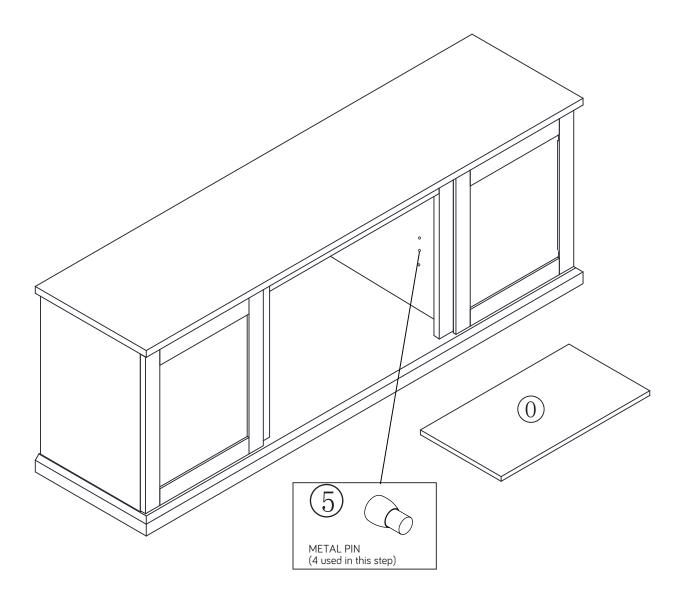

Page 18 FP3

- Peel APPLIQUES from the APPLIQUE CARDS (4) and stick them onto each visible HIDDEN CAM. This completes assembly. Clean with a damp cloth. Wipe dry.
- Apply the WARNING LABEL (11) to the TOP (A). You should be able to read the label when the TV is removed from the unit. When the TV is in place, it should hide the label. Peel off the backing and apply the label as shown in the diagram.
- ♦ NOTE: This is a permanent label intended to last for the life of the product. Once applied, do not try to remove it.
- ◆ This completes assembly. Clean with a damp cloth. Wipe dry.



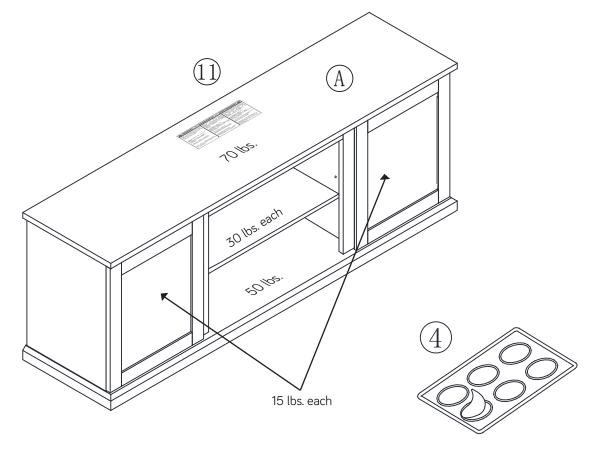


Fasten the BRACKETS (X and Y) to the FIREPLACE (W). Use six 3/8" FLAT HEAD SCREWS (ZZ).


#### **A WARNING**

#### CAUTION!!

Please read all FIREPLACE instructions prior to installing or removing it from your unit.

Do not plug the FIREPLACE into the power supply until it is installed and your unit is in its final position. Do not move the FIREPLACE while it is plugged into a power supply. Unplug it before moving it.



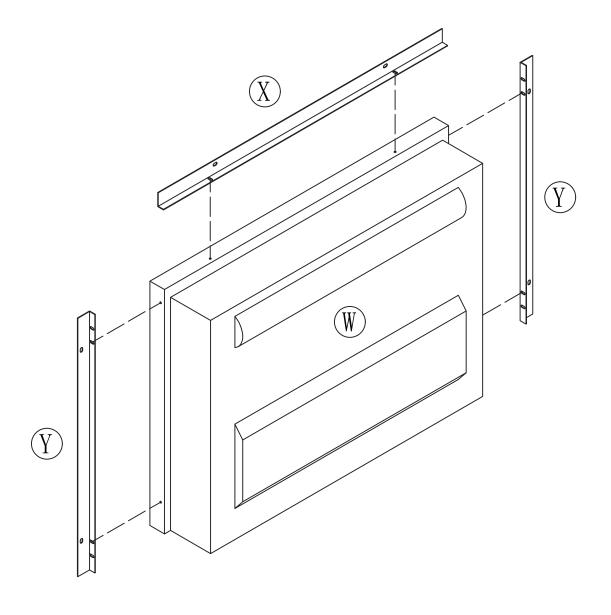


Page 20 FP3


Insert the FIREPLACE (W) in through the opening in the back of your unit.


Fasten the FIREPLACE (W) to the MOLDINGS (J, K and L).

Use two BLACK 3/8" PAN HEAD SCREWS (ZZ) through the BRACKETS on the FIREPLACE and into the holes in the MOLDINGS.

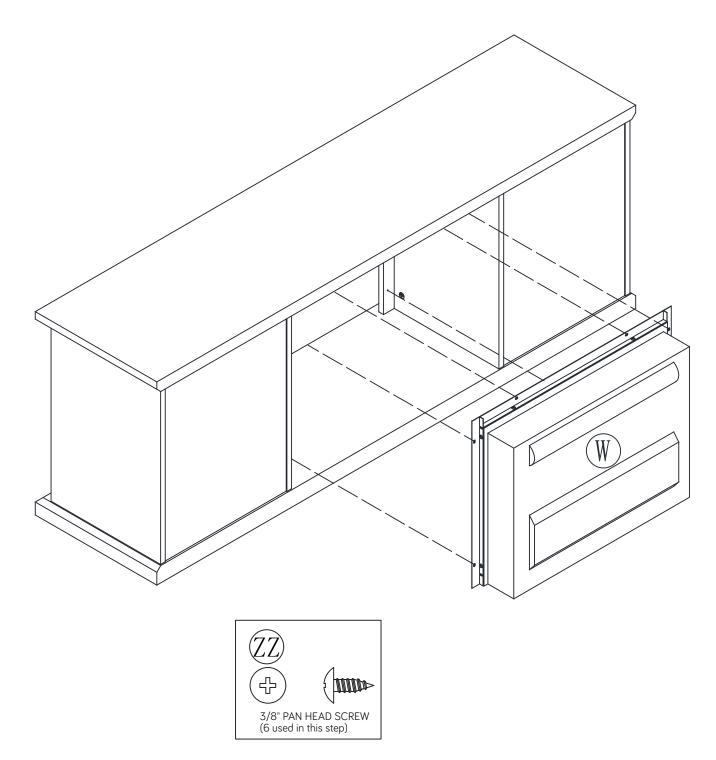

- Peel APPLIQUES from the APPLIQUE CARDS (4) and stick them onto each visible HIDDEN CAM. This completes assembly. Clean with a damp cloth. Wipe dry.
- Apply the WARNING LABEL (11) to the TOP (A). You should be able to read the label when the TV is removed from the unit. When the TV is in place, it should hide the label. Peel off the backing and apply the label as shown in the diagram.
- ♦ NOTE: This is a permanent label intended to last for the life of the product. Once applied, do not try to remove it.
- ◆ This completes assembly. Clean with a damp cloth. Wipe dry.

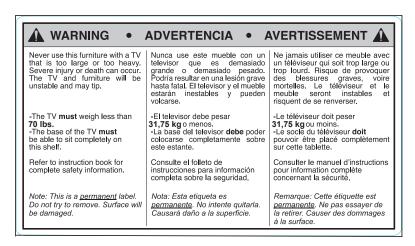

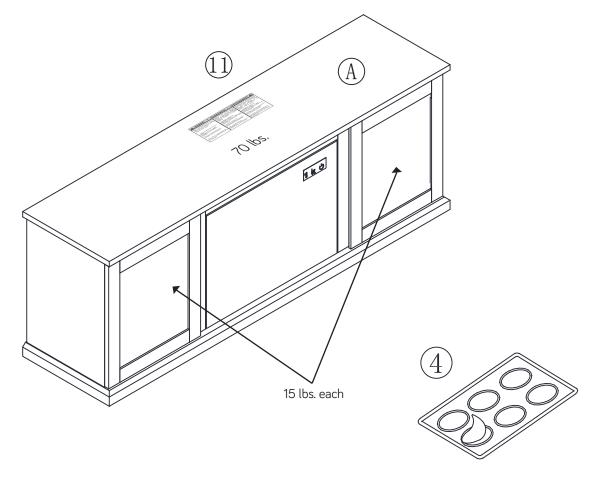

Page 22 FP3