
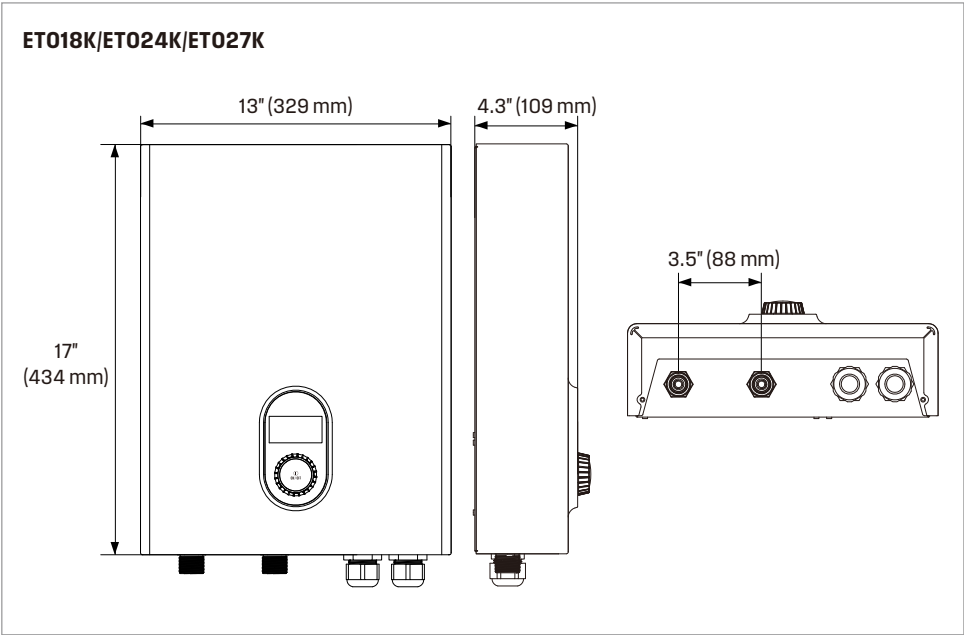


2.2 Dimensions and Connection Points

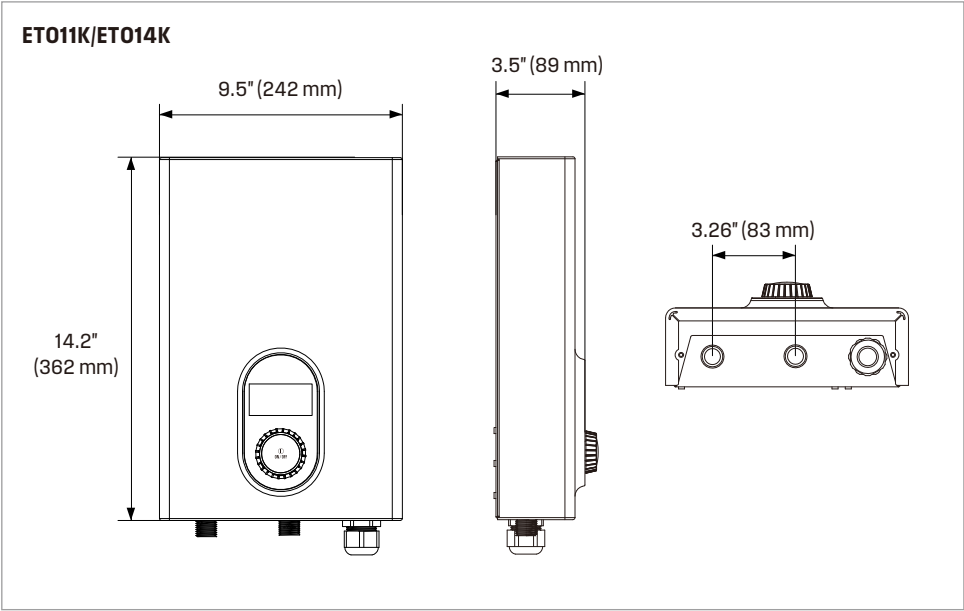

2.3 Technical Parameters

Model	ETO11K	ETO14K
Voltage	240 V	240 V
Wattage	11 kW	14 kW
Min. Required Circuit Breaker Size	1 X 50 A	1 X 63 A
Max. Amperage	46 A	59 A
Recommended Wire Size	1 X 8 AWG	1 X 6 AWG
Min. Water Flow to Activate the Unit	0.4 GPM / 1.5 L/min	0.5 GPM / 1.8 L/min
Safe Operating Pressure	3 PSI - 120 PSI	
Water Connections	1/2" NPT	
Installation	Wall mounted	
Temperature Setting	Digital Panel	
Dimensions (H × W × D)	14.2" × 9.5" × 3.5" (362 × 242 × 89 mm)	

Model	ETO18K	ETO24K	ETO27K
Voltage	240 V	240 V	240 V
Wattage	18 kW	24 kW	27 kW
Min. Required Circuit Breaker Size	2 X 40 A	3 X 40 A	3 X 40 A
Max. Amperage	75 A	100 A	113 A
Recommended Wire Size	2 X 8 AWG	3 X 8 AWG	3 X 8 AWG
Min. Water Flow to Activate the Unit	0.66 GPM / 2.5 L/min	0.79 GPM / 3.0 L/min	0.79 GPM / 3.0 L/min
Safe Operating Pressure	3 PSI - 120 PSI		
Water Connections	3/4" NPT		
Installation	Wall mounted		
Temperature Setting	Digital Panel		
Dimensions (H × W × D)	17" × 13" × 4.3" (434 × 329 × 109 mm)		