


WAVEPORT LED CEILING FAN

Español p. 22

ATTACH YOUR RECEIPT HERE

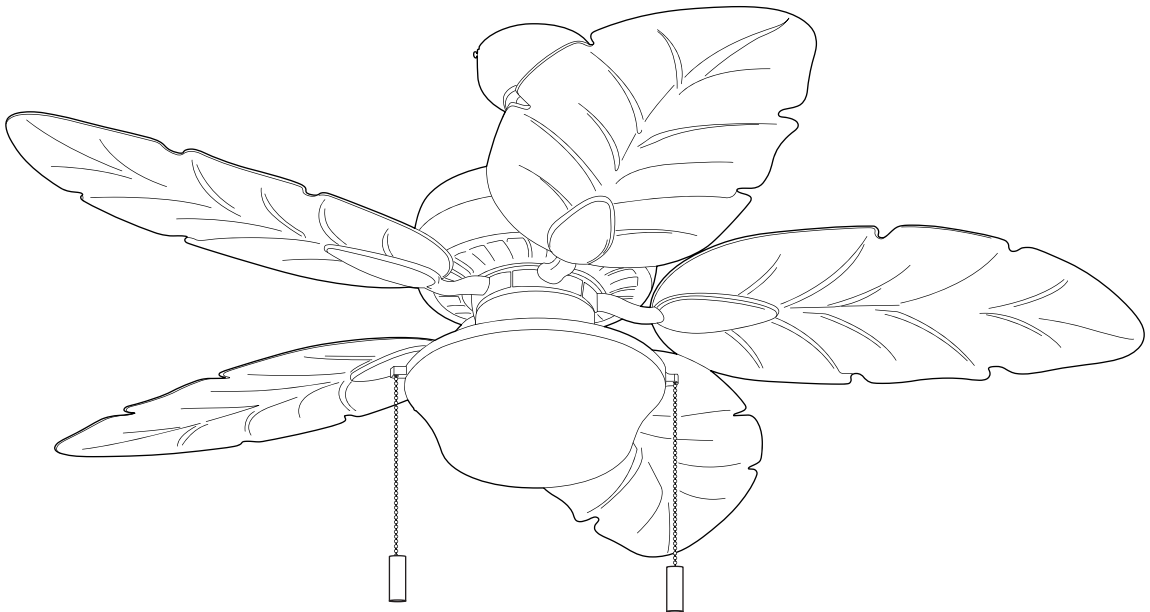

Purchase Date _____



Intertek
4009218

APPROVED FOR USE
IN DAMP LOCATIONS

Questions, problems, missing parts? Before returning, contact us on:
800-527-1292, 8:30 a.m. - 5 p.m., CST, Monday - Friday.

TABLE OF CONTENTS

Safety Information	2
Package Contents	5
Hardware Contents	6
Preparation	6
Initial Installation	6
Downrod-Style Fan Mounting	9
Closemount-Style Fan Mounting	11
Wiring	12
Final Installation	14
Installing Fan Without Light Kit (Optional)	17
Operating Instructions	17
Care and Maintenance	19
Troubleshooting	20
Limited Lifetime Warranty	21
Replacement Parts List	21



SAFETY INFORMATION



CAUTION: Changes or modifications not approved by the party responsible for compliance could void the user's authority to operate the equipment.

***NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- * Reorient or relocate the receiving antenna.
- * Increase the separation between the equipment and receiver.
- * Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

The device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, (2) this device must accept any interference received, including interference that may cause undesired operation.

Distributed by: Litex Industries Inc., P.O. Box 535639, Grand Prairie, TX, 75050; 800-527-1292

NOTE: Dimmable to 10%.

SAFETY INFORMATION

READ AND SAVE THESE INSTRUCTIONS

Please read and understand this entire manual before attempting to assemble, install or operate the product. Review the accompanying assembly diagrams.

- Do not discard fan carton or foam inserts. Should this fan need to be returned to the factory for repairs, it must be shipped in its original packaging to ensure proper protection against damage that might exceed the initial cause for return.
- Make sure all electrical connections comply with local codes, ordinances, the National Electrical Code and ANSI/NFPA 70-1999. Hire a qualified electrician or consult a do-it-yourself wiring handbook if you are unfamiliar with installing electrical wiring.
- Make sure the installation site you choose allows a minimum clearance of 7 ft. from the blades to the floor and at least 30 in. from the end of the blades to any obstruction.
- After you install the fan, make sure all connections are secure to prevent the fan from falling.
- The net weight of this fan including the light kit is: 18.48 lbs.

DANGER

When using an existing outlet box, make sure the outlet box is securely attached to the building structure and can support the full weight of the fan. Failure to do this can result in serious injury or death. The stability of the outlet box is essential in minimizing wobble and noise in the fan after installation is complete.

To reduce the risk of serious bodily injury, DO NOT use power tools to assemble any part of the fan, including the blades.

WARNING



To reduce the risk of fire, electrical shock or personal injury, mount fan to outlet box marked "ACCEPTABLE FOR FAN SUPPORT OF 35 LBS. OR LESS" and use mounting screws provided with the outlet box. Most outlet boxes commonly used for the support of lighting fixtures are not acceptable for fan support and may need to be replaced. Consult a qualified electrician if in doubt.

When mounting fan to a ceiling outlet box, use a METAL octagonal outlet box; do NOT use a plastic outlet box. Secure the outlet box directly to the building structure. The outlet box and its support must be able to support the moving weight of the fan (at least 35 lbs.).

To reduce the risk of fire, electrical shock or personal injury, wire connectors provided with this fan are designed to accept only one 12-gauge house wire and two lead wires from the fan. If your house wire is larger than 12-gauge or there is more than one house wire to connect to the corresponding fan lead wires, consult an electrician for the proper size wire connectors to use.

To avoid personal injury, the use of gloves may be necessary while handling fan parts with sharp edges.



SAFETY INFORMATION

WARNING

To reduce the risk of fire or electrical shock, do not use the fan with any solid state speed control device or control fan speed with a full range dimmer switch.

To reduce the risk of fire, electrical shock or personal injury, do not bend the blade arms when installing them, balancing the blades or cleaning the fan. Do not insert objects between the rotating fan blades.

To reduce the risk of personal injury, use *ONLY* parts provided with this fan. The use of parts *OTHER* than those provided with this fan will void the warranty.

Before proceeding, be sure to shut off electricity at main switch or circuit breaker in order to avoid electrical shock.


CAUTION

Be sure outlet box is properly grounded and that a ground wire (GREEN or BARE) is present.

Once installation is complete, carefully check all screws, bolts and nuts on fan motor assembly to ensure that they are secured.

Do NOT tamper with or attempt to repair LED component. The light source is designed for this specific application and should not be serviced by untrained personnel. If any servicing is required, call our customer service department.

PACKAGE CONTENTS

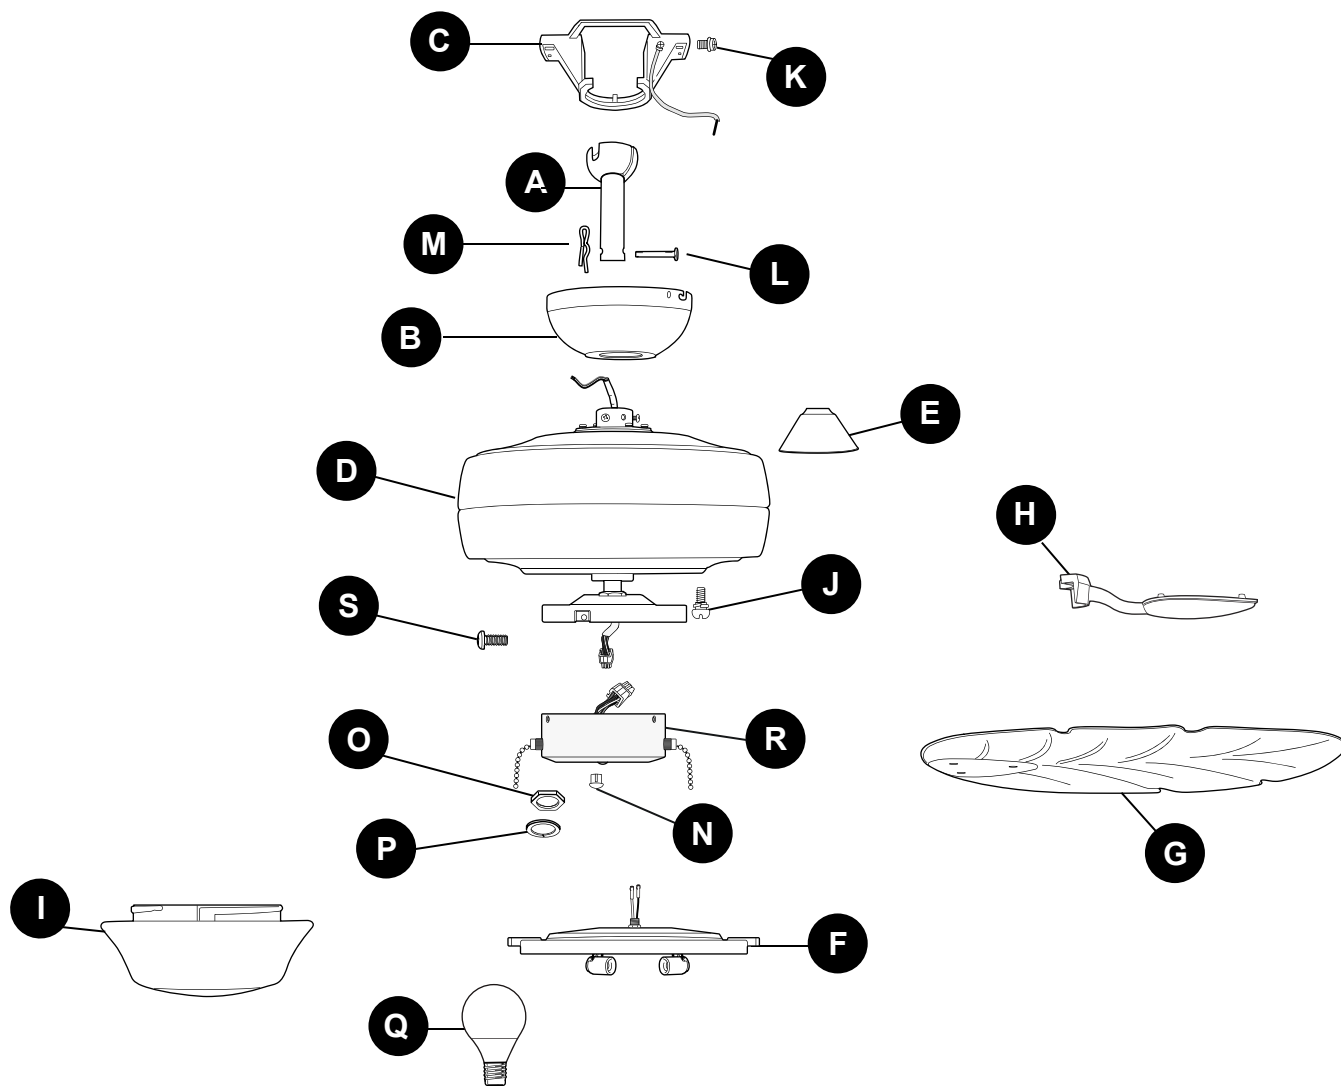

PART	DESCRIPTION	QUANTITY
A	Downrod	1
B	Canopy	1
C	Mounting Bracket (preassembled)	1
D	Motor Housing	1
E	Yoke Cover	1
F	Light Kit Fitter	1
G	Blade	5
H	Blade Arm	5
I	Shade	1
J	Motor Screw/ Lock Washer (preassembled)	10 + 1 extra
K	Canopy Mounting Screw (preassembled)	4

PART	DESCRIPTION	QUANTITY
L	Pin (preassembled)	1
M	Clip (preassembled)	1
N	Cap (preassembled)	1
O	Hex Nut (preassembled)	1
P	Lock Washer (preassembled)	1
Q	Bulb	2
R	Switch Housing	1
S	Switch Housing Screw (preassembled)	3

! IMPORTANT REMINDER: You must use the parts provided with this fan for proper installation and safety.

HARDWARE CONTENTS (shown actual size)

AA



Blade
Screw

Qty. 15
+ 1 extra


BB



Rubber Blade
Washer

Qty. 15
+ 1 extra


CC



Wire
Connector

Qty. 4

DD

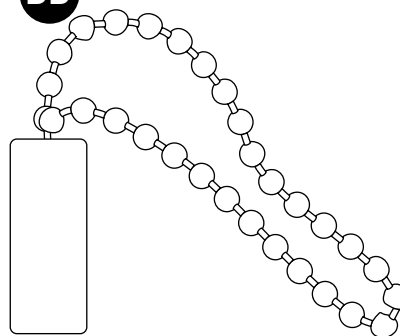

Pull Chain
Extension

Qty. 2

PREPARATION

Before beginning assembly of product, make sure all parts are present. Place motor on carpet or on foam to avoid damage to finish. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 120 minutes


Tools Required for Assembly (not included): Electrical Tape, Phillips Screwdriver, Pliers, Safety Glasses, Stepladder and Wire Strippers.

Helpful Tools (not included): AC Tester Light, Tape Measure, Do-It-Yourself Wiring Handbook and Wire Cutters.

INITIAL INSTALLATION

1. Turn off circuit breakers and wall switch to the fan supply line leads.

! DANGER: Failure to disconnect power supply prior to installation may result in serious injury or death.

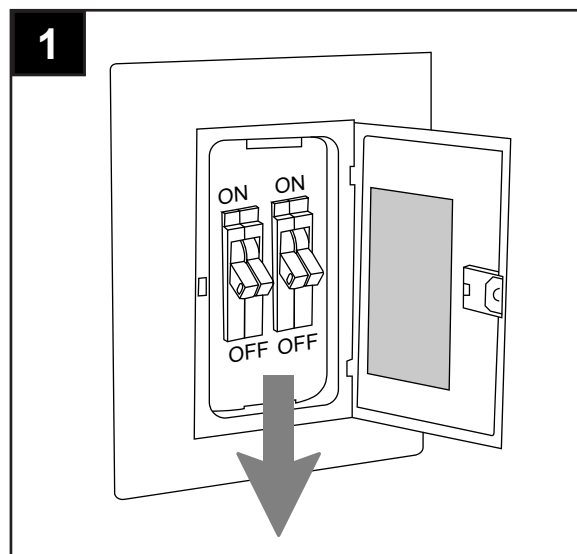


INITIAL INSTALLATION

2. If applicable, remove existing fan, including the mounting bracket, from outlet box and disconnect all electrical wiring.


⚠ WARNING: To reduce the risk of personal injury, use *ONLY* parts provided with your new fan. The use of parts *OTHER* than those provided with this fan will void the warranty.

Set aside screws, spring washers and flat washers (provided with the outlet box) to be used for fan installation.

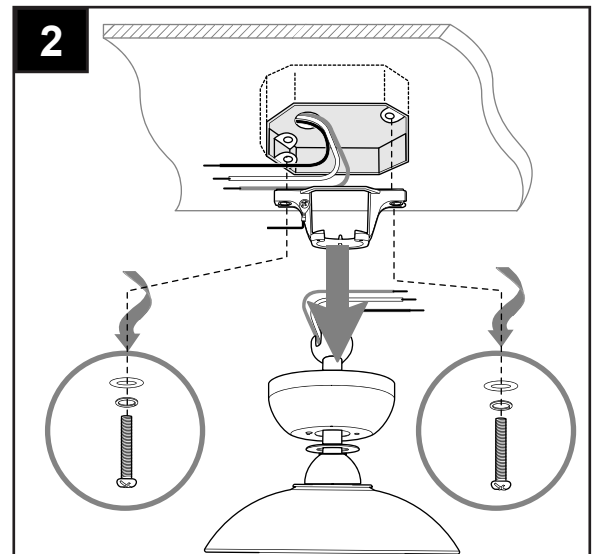


3. Determine mounting method to use.
 - A. Downrod mount (standard or angled ceiling)
 - B. Closemount (standard ceiling only)**IMPORTANT:** If using the angle mount, ensure the ceiling angle is not steeper than 19°.

***Helpful Hint:** Downrod-style mounting is best suited for ceilings 8 ft. or higher. For taller ceilings you may want to use a longer downrod (not included). Angle-style mounting is best suited for angled or vaulted ceilings. A longer downrod is sometimes necessary to ensure proper blade clearance. Closemount mounting is more suitable for ceilings lower than 8 ft. high.

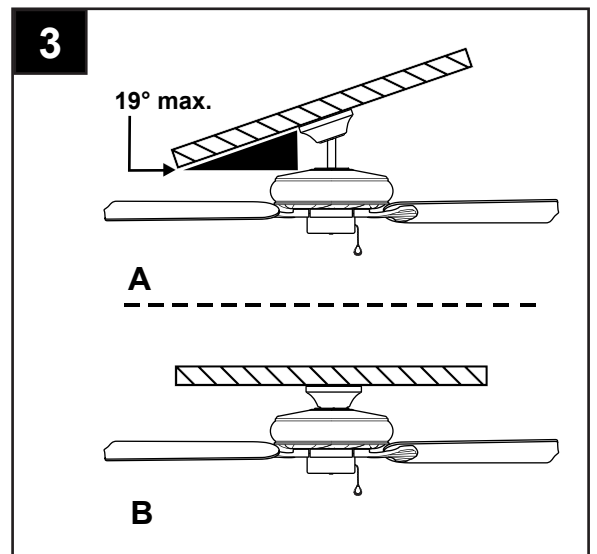


4. Check to make sure blades (G) will be at least 30 in. from any obstruction and at least 7 ft. above the floor.

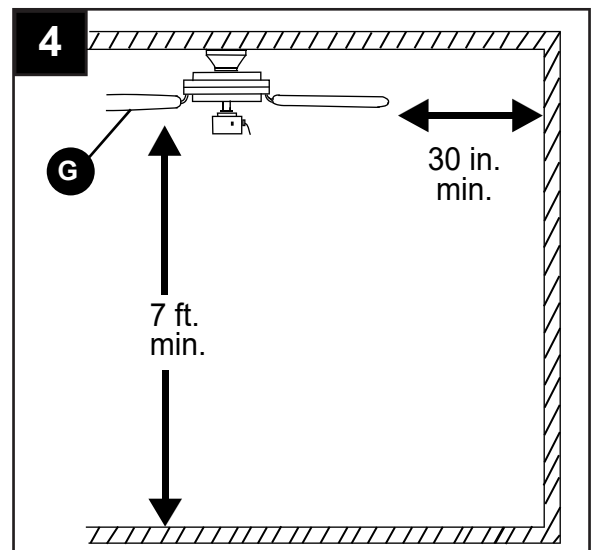

INITIAL INSTALLATION

- 5a. Loosen canopy mounting screws (K) in slotted holes of canopy (B) and remove the other two canopy mounting screws (K); save for later use.


Remove mounting bracket (C) from canopy (B).

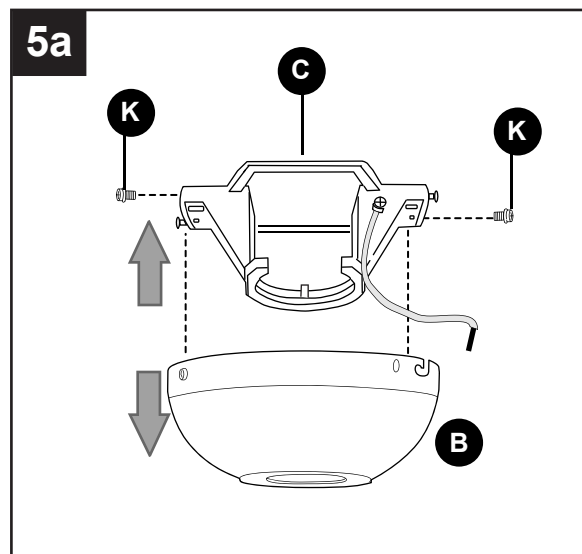

- 5b. Secure mounting bracket (C) to outlet box (not included) using screws, spring washers and flat washers provided with the outlet box.

***NOTE:** It is very important you use the proper hardware when installing the mounting bracket (C) as this will support the fan.


IMPORTANT: If using the angle mount, make sure open end of mounting bracket (C) is installed facing the higher point of the ceiling, and ensure the ceiling angle is not steeper than 19°.

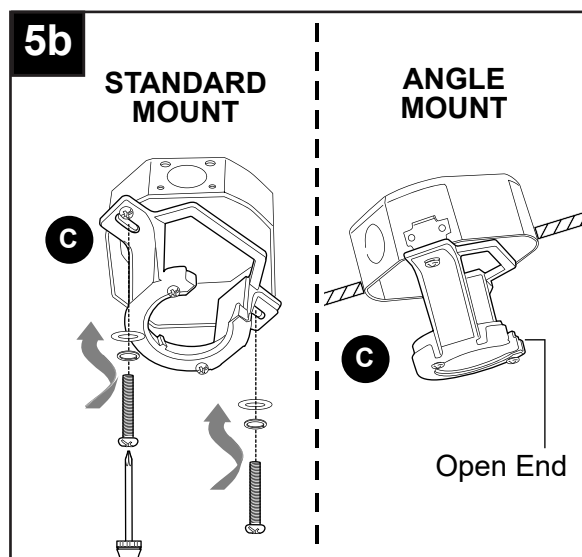

6. Remove motor screws/lock washers (J) from underside of motor housing (D). [If there are plastic motor blocks installed with the motor screws/lock washers (J), discard the plastic motor blocks.]

For **DOWNROD-STYLE FAN MOUNTING**, proceed to step 1 on the next page.


For **CLOSEMOUNT-STYLE FAN MOUNTING**, skip to page 11.

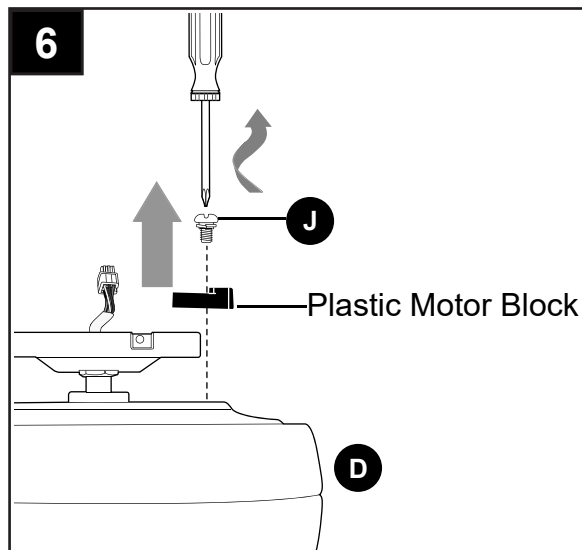


DOWNROD-STYLE INSTALLATION

1a. Remove pin (L) and clip (M) from downrod (A).


1b. Partially loosen preassembled set screws and nuts in yoke at top of motor housing (D).

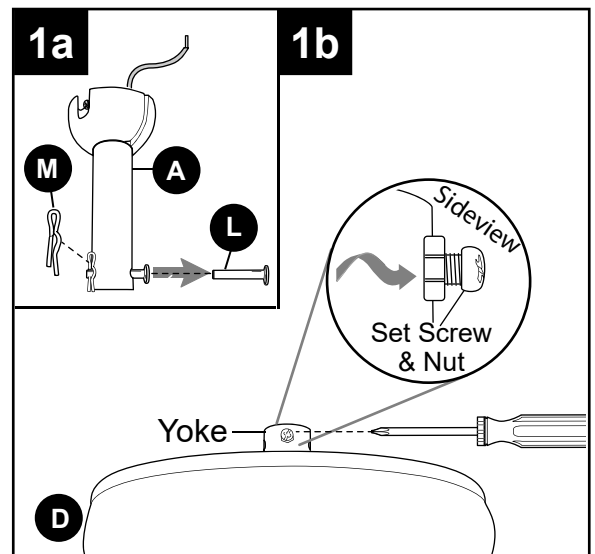

2. Insert downrod (A) through canopy (B), and yoke cover (E). Thread wires from motor housing (D) up through downrod (A).

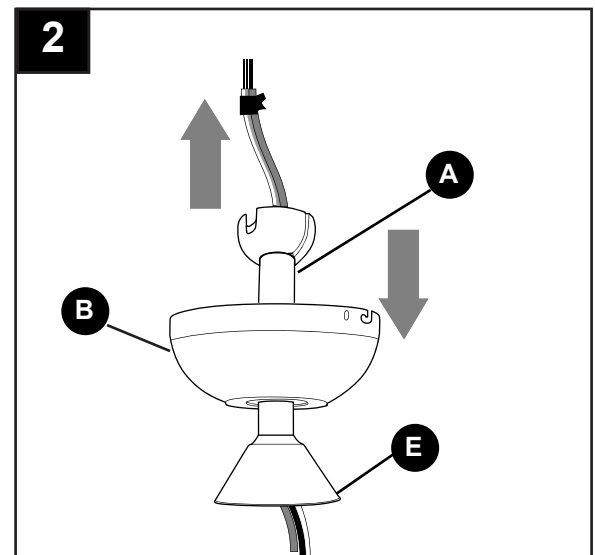

3. Slip downrod (A) into yoke, align holes and re-install pin (L) and clip (M). Tighten downrod (A) set screws and then tighten nuts. Slide yoke cover (E) down until it rests on top of motor housing (D).

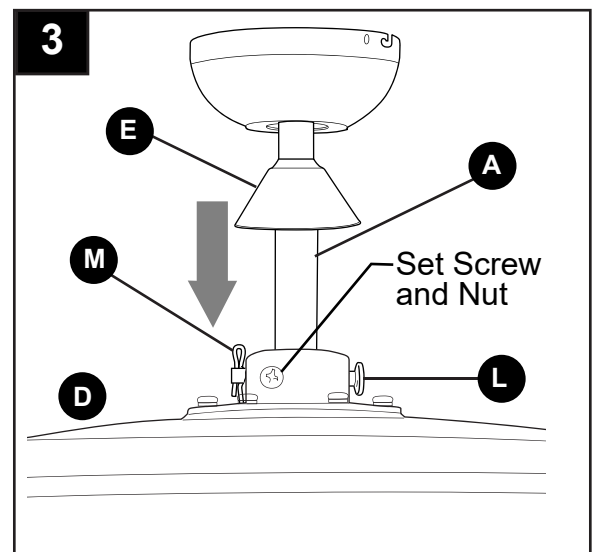



DOWNROD-STYLE INSTALLATION

4. Depending on the length of downrod you use, you may need to cut the lead wires back to simplify the wiring. If you decide to cut back the lead wires, it is suggested you do so in the following manner:

Take the lead wires and make sure you have pulled them all the way through the top of the downrod. Start at the TOP of the hanging ball on the downrod and measure 8 in. of lead wire, and then cut the excess wire off with wire cutters (not included).

NOTE: If you do *not* cut back the lead wires, **Steps 4 and 5 are not necessary and you may proceed to Step 6 instead.**


5. If you cut back the lead wires in Step 4, strip 1/2 in. of insulation from end of each wire -- WHITE, BLACK, GREEN and BLUE (if applicable). Twist stripped ends of each strand of wire within the insulation with pliers (not included).

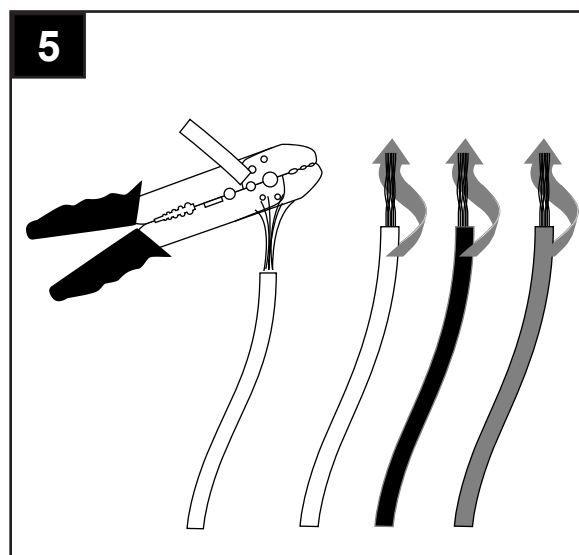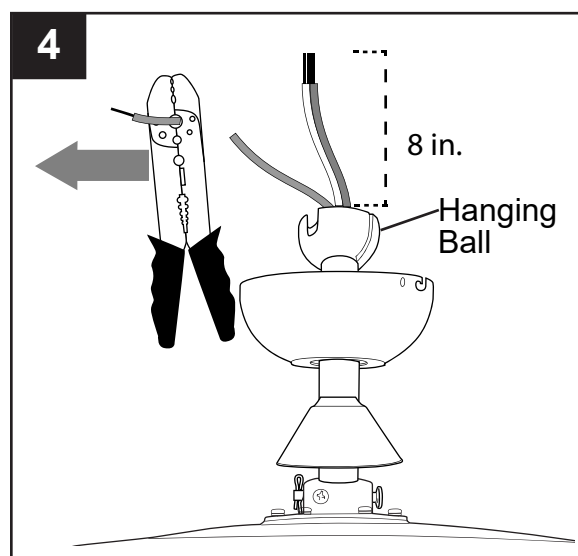

6. Install hanging ball of downrod (A) into opening of mounting bracket (C). Align the slot in hanging ball with the tab in mounting bracket (C).

⚠ DANGER: Failure to align slot in hanging ball with the tab in mounting bracket (C) may result in serious injury or death.


Continue to **WIRING** on page 12.

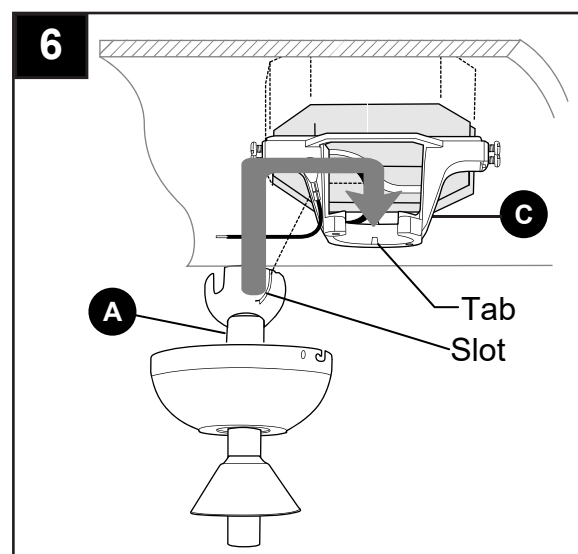


CLOSEMOUNT-STYLE INSTALLATION

1. Remove preassembled canopy cover from bottom of canopy (B). [**NOTE:** It may be necessary to use the handle end of a screwdriver (not included) to remove the canopy cover by tapping on the canopy cover from the *inside* of the canopy (B).]


NOTE: The downrod (A), yoke cover (E) and canopy cover are not used in this type of installation.

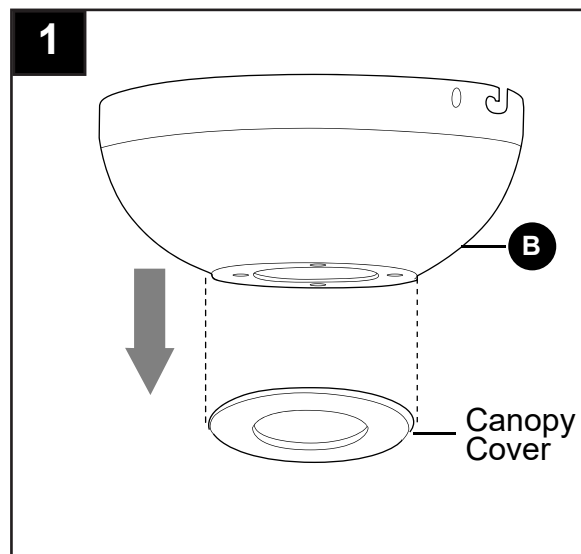

2. Remove every other preassembled screw/lock washer from top of motor housing (D).

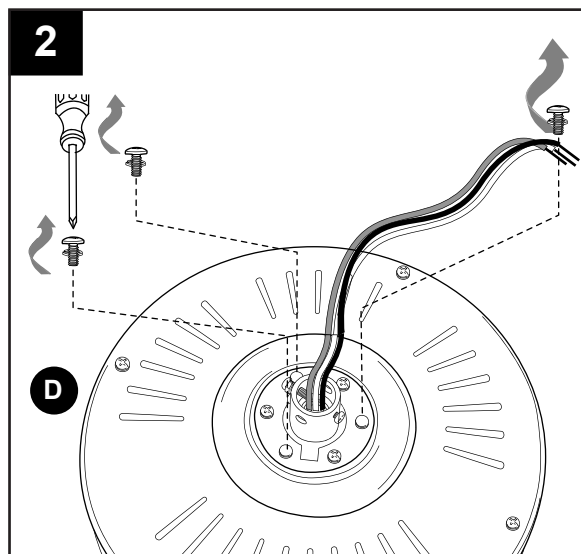


3. Pull wires up through hole in the middle of the canopy (B) and attach canopy (B) to motor housing (D) using the three previously removed screws/lock washers.

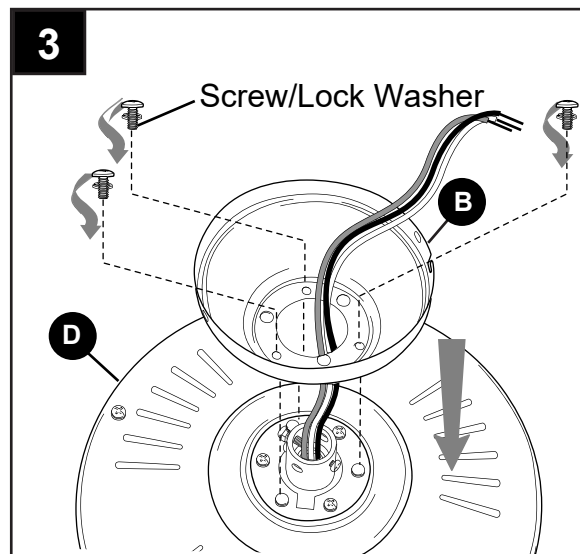

CLOSEMOUNT-STYLE INSTALLATION

- Temporarily hang fan on the tab on the mounting bracket (C) using one of the non-slotted holes in the canopy (B).

Continue to **WIRING** below.

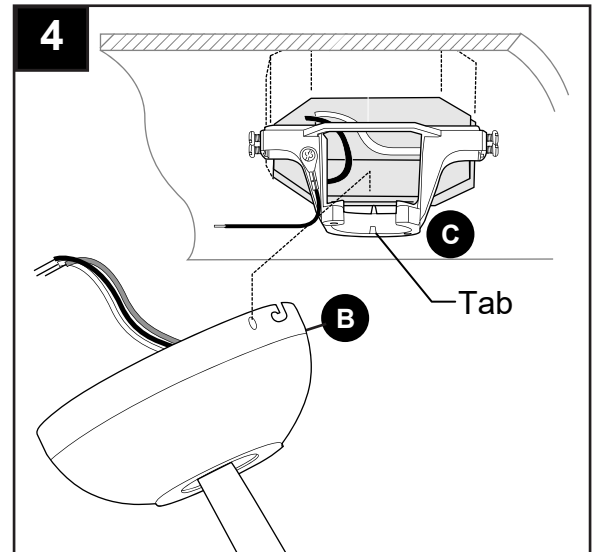

WIRING

⚠ WARNING: To reduce the risk of fire, electrical shock or personal injury, lever wire connectors provided with this fan are designed to accept only one 12-gauge house wire and one lead wires from the fan. If your house wire is larger than 12-gauge or there is more than one house wire to connect to the corresponding fan lead wires, consult an electrician for the proper size lever wire connectors to use.

⚠ CAUTION: Be sure outlet box is properly grounded and that a ground (GREEN or BARE) wire is present.


⚠ WARNING: If house wires are different colors than referred to in the following steps, stop immediately. A professional electrician is recommended to determine wiring.

⚠ WARNING: Using a full range dimmer switch (not included) to control fan speed will cause a loud humming noise from fan. To reduce the risk of fire or electrical shock, do NOT use a full range dimmer switch to control fan speed.

NOTE: This fan is remote control adaptable (remote control not included). Please refer to instructions provided with the remote control before proceeding with these wiring instructions.

- Choose wiring diagram (Fig. 1a, Fig. 1b or Fig. 1c) that fits your situation and make appropriate wiring connections as follows: **[IMPORTANT:** Use one of the wire connectors (CC) to make each wire connection, making sure to screw wire connector (CC) on in a clockwise direction.]

- 1a. FAN AND LIGHT CONTROLLED BY PULL CHAINS:** Connect GREEN wire from fan (on downrod (A), if applicable, and mounting bracket (C)) to BARE/GREEN wire from ceiling. Connect BLACK and BLUE wire from fan to BLACK wire from ceiling. Connect WHITE wire from fan to WHITE wire from ceiling.

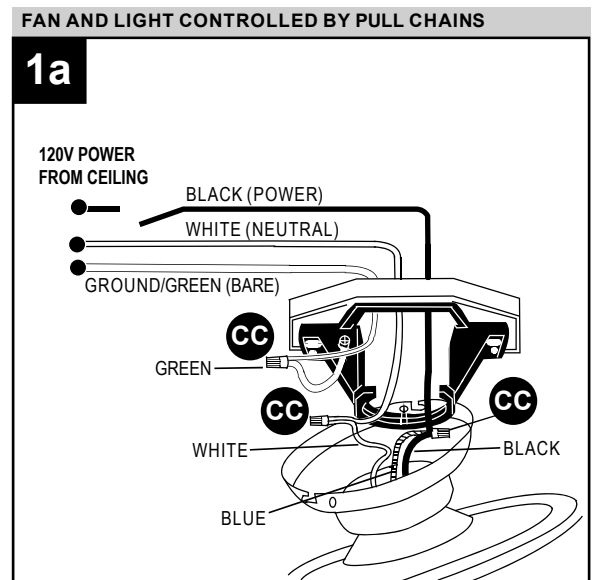

WIRING

- 1b. **FAN CONTROLLED BY PULL CHAIN, LIGHT BY WALL SWITCH:** Connect BLACK wire from fan to BLACK wire from ceiling. Connect BLUE wire from fan to the BLACK wire from the independent wall switch for the light. Connect WHITE wire from fan to WHITE wire from ceiling. Connect GROUND (GREEN) wires from fan (on downrod (A), if applicable, and mounting bracket (C)) to BARE/GREEN wire from ceiling.

- 1c. **FAN AND LIGHT CONTROLLED BY TWO WALL SWITCHES:** Connect BLACK wire from fan to BLACK wire from the independent wall switch for the fan. Connect BLUE wire from fan to the BLACK wire from the other independent wall switch for the light. Connect WHITE wire from fan to WHITE wire from ceiling. Connect GROUND (GREEN) wires from fan (on downrod (A), if applicable, and mounting bracket (C)) to BARE/GREEN wire from ceiling.

NOTE: BLACK wire is hot power for fan. BLUE wire is hot power for light kit. WHITE wire is common for fan and light kit. GREEN or BARE wire is ground.

2. Wrap electrical tape (not included) around each individual wire connector (CC) down to the wire.


⚠ WARNING: Make sure no bare wire or wire strands are visible after making connections. Place GREEN and WHITE wire connections on the opposite side of the outlet box from the BLACK and BLUE wire connections.

Turn spliced/taped wires upward and gently push wires and wire connectors (CC) into outlet box.

Hardware Used




Wire Connector



x 4


FAN CONTROLLED BY PULL CHAIN, LIGHT BY WALL SWITCH

1b

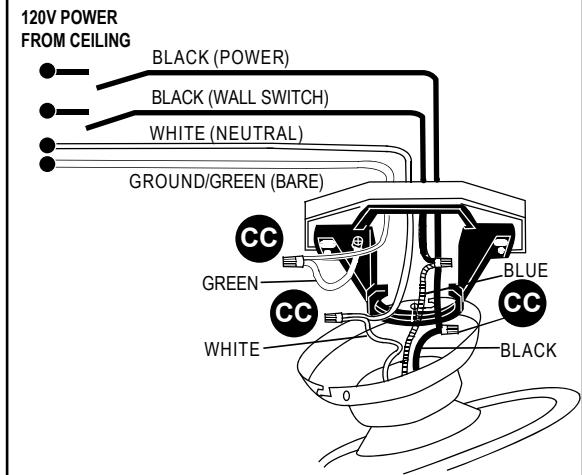


FAN AND LIGHT CONTROLLED BY TWO WALL SWITCHES

1c

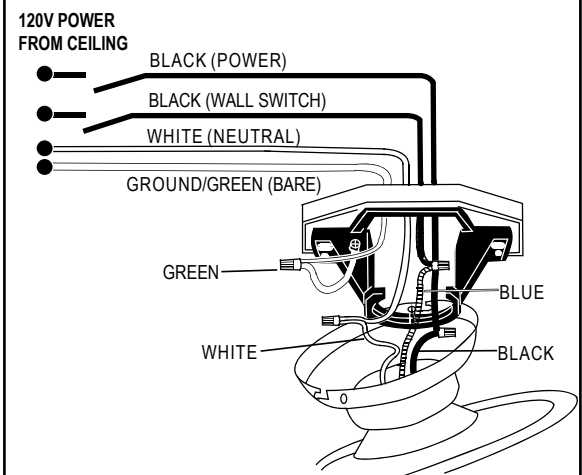

2

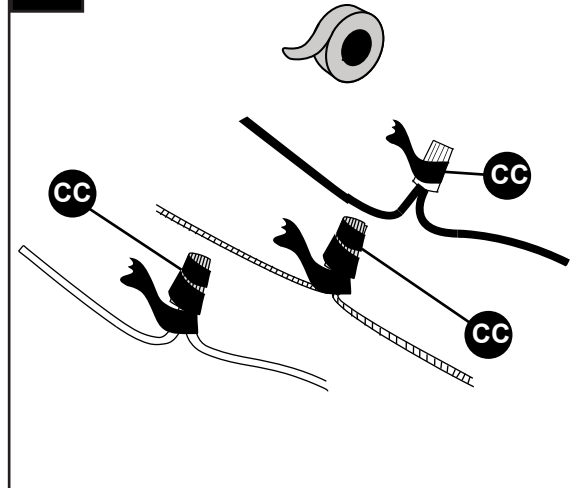


FINAL INSTALLATION

1. Lift canopy (B) to mounting bracket (C), aligning slotted holes in canopy (B) with loosened canopy mounting screws (K) in mounting bracket (C). Twist canopy (B) clockwise to lock. Re-insert the two canopy mounting screws (K) previously removed (Step 5a, page 8) and tighten all canopy mounting screws (K) securely.

2. **⚠ DANGER:** To reduce the risk of serious bodily injury, DO NOT use power tools to assemble the blades (G). If screws are overtightened, blades (G) may crack and break. Partially insert three blade screws (AA) along with three rubber blade washers (BB) into holes in blade (G) (labeled THIS SIDE UP) to attach blade arm (H) to blade (G). Then, tighten each blade screw (AA) starting with the one in the middle

Repeat for remaining blades (G) and blade arms (H).




Hardware Used

AA	Blade Screw		x 15
BB	Rubber Blade Washer		x 15

3. Attach blade arms (H) to the bottom of motor housing (D) with motor screws/lock washers (J) previously removed (Step 6, page 8). Tighten motor screws (J) securely. Repeat for remaining blade arms (H). Make sure to completely secure each blade arm (H) before proceeding to the next.


If you do NOT wish to use the light kit, skip to INSTALLING FAN WITHOUT LIGHT KIT (OPTIONAL) on page 17.

If you DO wish to use the light kit, proceed to Step 4.

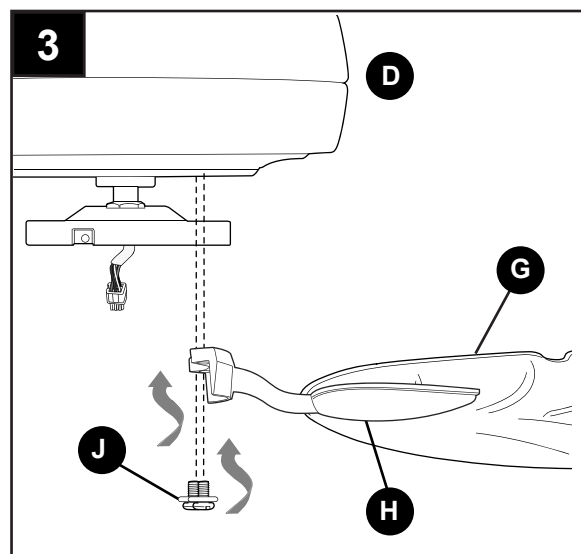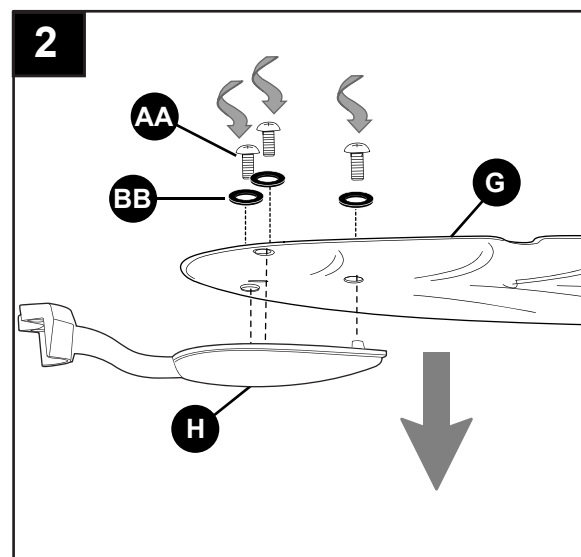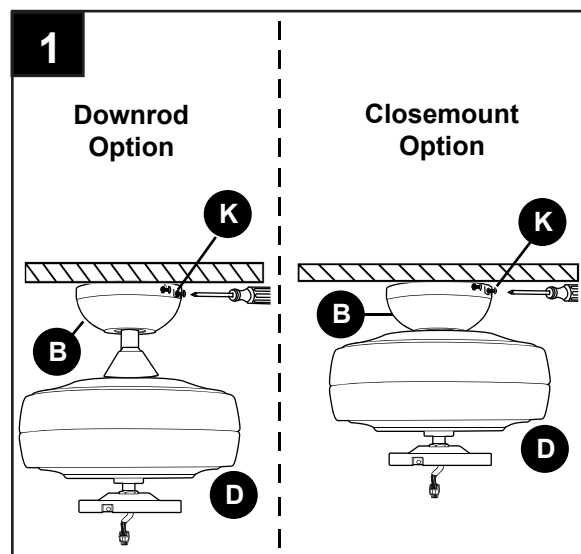


FINAL INSTALLATION


4. **To install the fan with the light kit**, remove preassembled hex nut (O) and lock washer (P) from threaded rod at top of light kit fitter (F). Punch center cap (N) out of switch housing (R) with a screwdriver (not included). Gently feed molex wires (one at a time) from light kit fitter (F) through hole in middle of switch housing (R), and then screw switch housing (R) onto threaded rod on light kit fitter (F) -- ensure to align holes on pull chain guides with pull chains on switch housing (R). Tighten hex nut (O) over lock washer (P) for a secure fit.

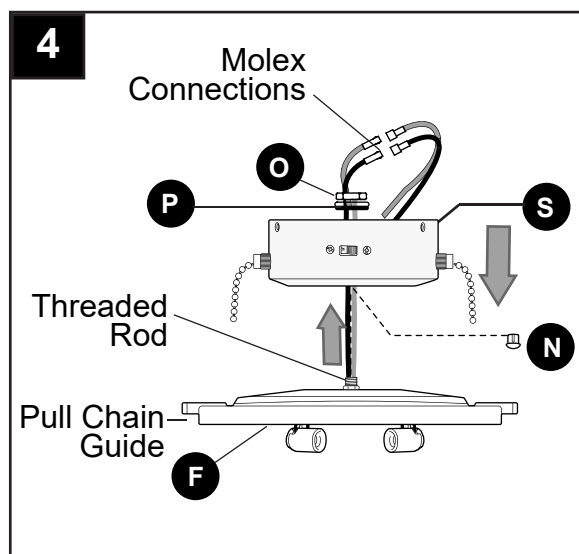

5. Connect WHITE molex wire from light kit fitter (F) to WHITE molex wire from switch housing (R). Connect BLACK molex wire from light kit fitter (F) to BLUE (or BLACK) molex wire from switch housing (R). Make sure molex wire connections snap together securely.

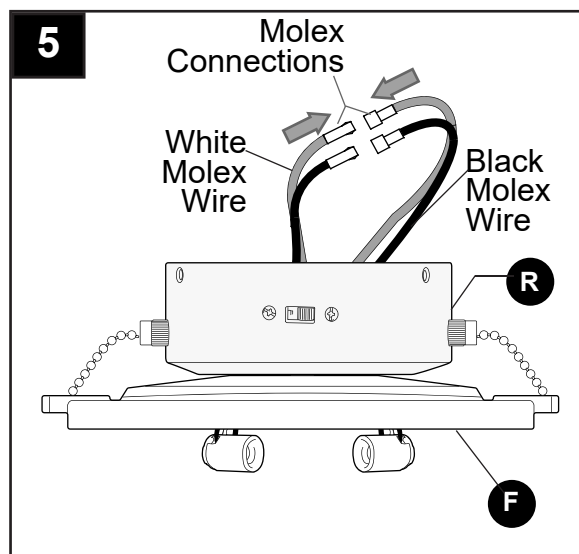


6. Remove the three preassembled switch housing screws (S) from switch housing plate on underside of motor housing (D). Connect male plug from motor housing (D) to female plug from switch housing (R), matching up the colors on the male plug with the colors on the female plug for correct fit. Make sure plugs are connected completely. Align holes in switch housing (R) with holes in switch housing plate, and secure switch housing (R) with three switch housing screws (S) previously removed. Tighten all screws securely.

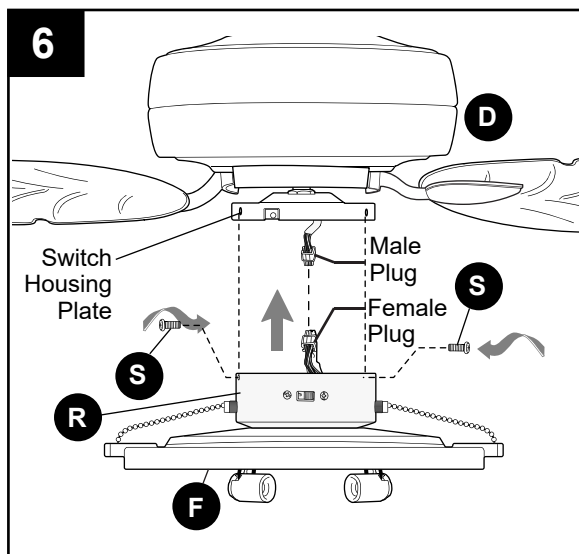

FINAL INSTALLATION

7. Install bulbs (Q).


⚠ WARNING: When replacing bulb(s), allow bulb(s) and shade to cool down before touching.

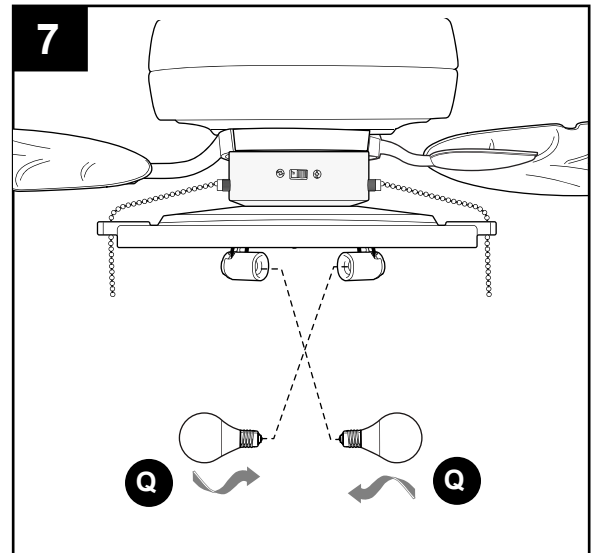

8. Thread preassembled fan and light pull chains through corresponding pull chain guides on the outer rim of the light kit fitter (F).

Align slots on shade (I) with protrusions on the inside of the light kit fitter (F). Turn shade (I) *clockwise* until it no longer turns.



NOTE: Pull down gently on the shade (I) to make sure it is secured completely.

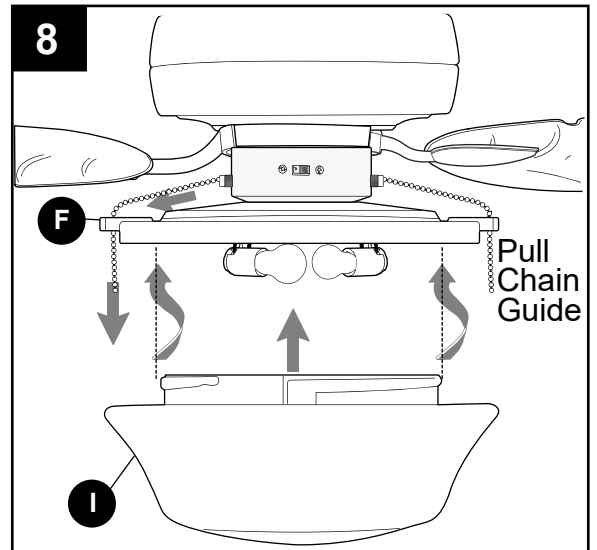

9. Attach pull chain extensions (DD) or custom pull chain extensions (not included) to fan and light pull chains.


Hardware Used

DD Pull Chain Extension x 2

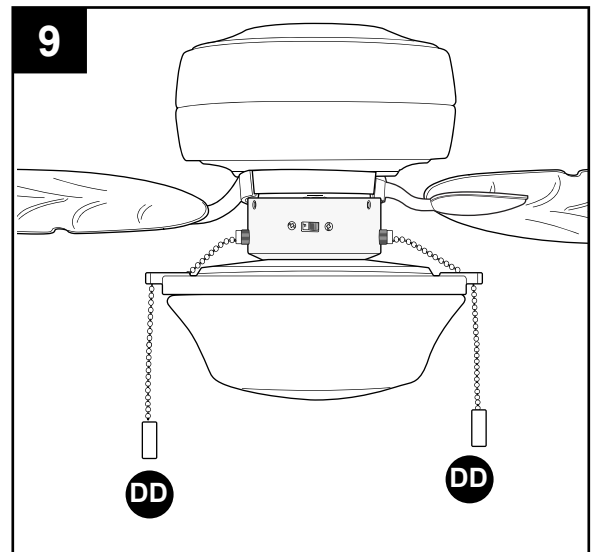

INSTALLING FAN WITHOUT LIGHT KIT



1. **If you do NOT wish to use the light kit**, remove the three preassembled switch housing screws (S) from switch housing plate on underside of motor housing (D). Connect male plug from motor housing (D) to female plug from switch housing (R), matching up the colors on the male plug with the colors on the female plug for correct fit. Make sure plugs are connected completely. Align holes in switch housing (R) with holes in switch housing plate. Re-insert switch housing plate screws (S) just removed and use a Phillips screwdriver to secure switch housing (R) to switch housing plate. Tighten all screws securely.

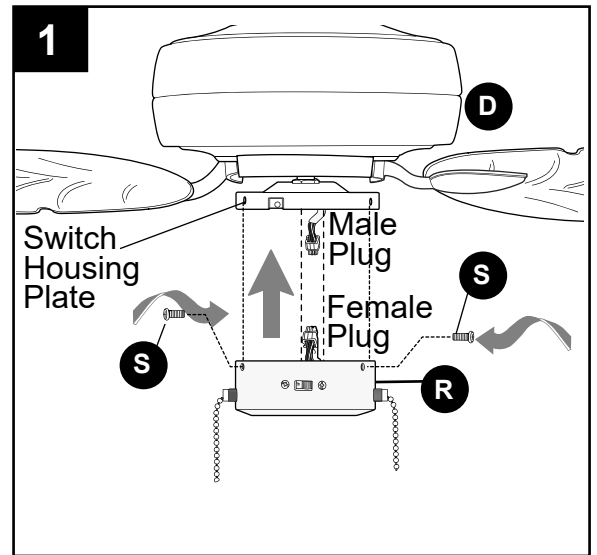

2. Attach necessary pull chain extension (DD) or custom pull chain extension (not included) to corresponding pull chain for fan.


Hardware Used

DD Pull Chain Extension x 1

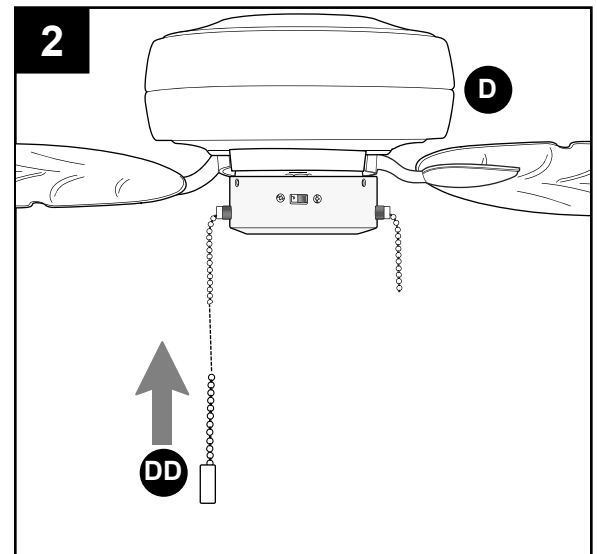


OPERATING INSTRUCTIONS

1. The fan pull chain has four positions to control fan speed. One pull is HIGH, two is MEDIUM, three is LOW and four turns the fan OFF.

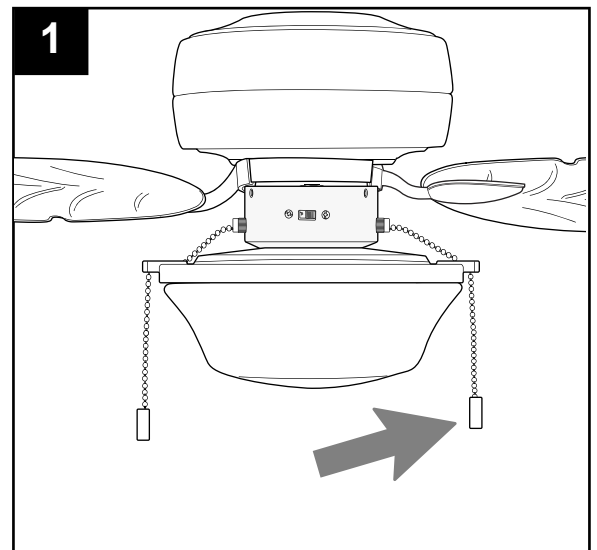


OPERATING INSTRUCTIONS

2. If applicable, the light pull chain is used to turn the light ON or OFF.

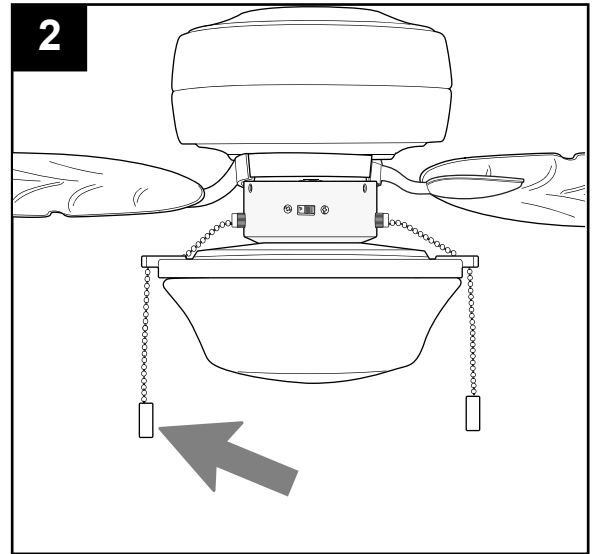


3. Use the fan reverse switch on the switch housing (S) to optimize your fan for seasonal performance. A ceiling fan will allow you to raise your thermostat setting in summer and lower your thermostat setting in winter without feeling a difference in your comfort.

NOTE: Wait for fan to stop before moving the reverse switch.

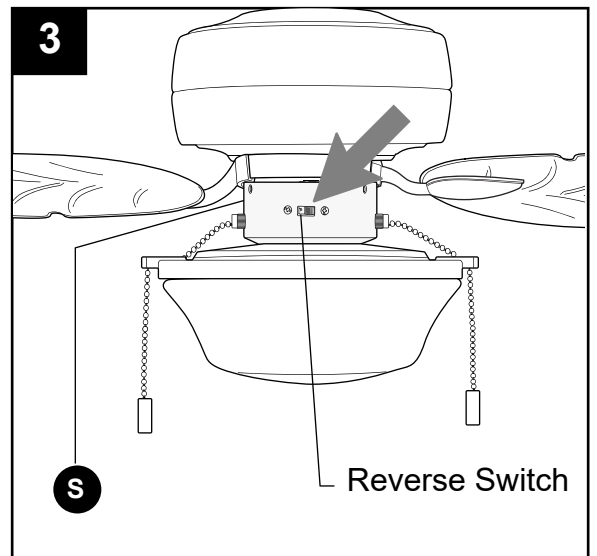


- 3a. In **warmer** weather, setting the reverse switch in the LEFT position will result in downward airflow creating a wind chill effect.
- 3b. In **cooler** weather, setting the reverse switch in the RIGHT position will result in upward airflow that can help move stagnant, hot air off the ceiling area.

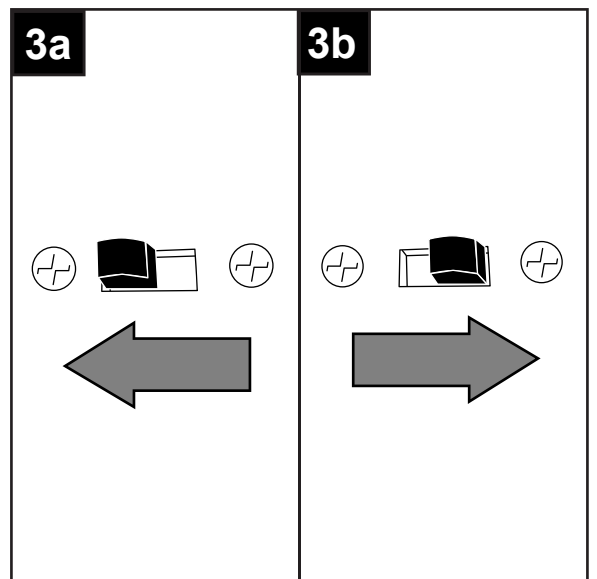

OPERATING INSTRUCTIONS

3c. **IMPORTANT:** Reverse switch must be set either ***completely*** LEFT or ***completely*** RIGHT for fan to function. If the reverse switch is set in the middle position, fan will not operate.

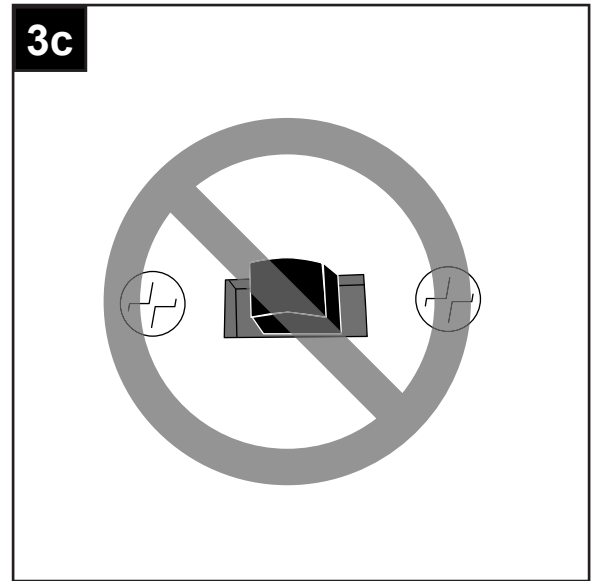

CARE AND MAINTENANCE

At least twice each year, lower canopy (B) to check downrod (A) assembly, canopy mounting screws (K) and then tighten all screws on the fan. Clean motor housing (D) with only a soft brush or lint-free cloth to avoid scratching the finish. Clean blades (G) with a lint-free cloth. You may occasionally apply a light coat of furniture polish to wood blades for added protection.

IMPORTANT: Shut off main power supply before beginning any maintenance. Do not use water or a damp cloth to clean the ceiling fan.

Bulb Replacement: Use standard-base 5.5-watt LED bulbs or incandescent/CFL equivalent.

TROUBLESHOOTING

⚠ WARNING: Before beginning work, shut off the power supply to avoid electrical shock.

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
Fan does not move.	1. Power is off or fuse is blown. 2. Faulty wire connection. 3. Reverse switch not engaged. 4. Plugs not connected properly.	1. Turn power on or check fuse. 2. Turn power off. Loosen canopy and check all connections. 3. Push switch firmly either left or right. 4. Check that male and female plugs in switch housing are connected properly according to instructions on page 15.
Noisy operation.	1. Blades are loose. 2. Cracked blade. 3. Full range dimmer switch. 4. Fan is new.	1. Tighten all blade screws. 2. Replace blade. 3. Use only with included speed control device. 4. Allow fan a "break in" period of a few days, especially when running the fan at Medium and High speeds.
Excessive wobbling.	1. Blades are loose. 2. Fan not securely mounted. 3. Fan too close to vaulted ceiling. 4. Set screw(s) on motor housing yoke is (are) not tightened properly. 5. Set screw on hanging ball is not tightened properly. 6. Unbalanced blades. 7. Blade arms incorrectly attached.	1. Tighten all blade screws. 2. Turn power off. Carefully loosen canopy and verify that mounting bracket is secure. 3. Use a longer downrod or move fan to another location. 4. Tighten yoke set screw(s) securely. 5. Carefully loosen and lower canopy and verify that set screw on hanging ball is tightened securely. 6. Switch one blade with a blade from the opposite side. 7. Re-install blade arms.
Fan operates but light fails	1. Wires in canopy not wired properly. 2. Wall switch to light is off. 3. Wires in light kit fitter not wired correctly. 4. Bulb(s) not installed correctly.	1. Check wires in outlet box and, if necessary, re-wire according to instructions on pages 12 and 13. 2. Make sure wall switch to light is on. 3. Check that connections in light kit fitter are connected properly according to instructions on page 15. 4. Re-install bulb(s).

NOTE: A small amount of "wobble" is normal and should not be considered a defect.

LIMITED LIFETIME WARRANTY

Set forth below, the manufacturer warrants the fan motor for this ceiling fan to be free from defects in workmanship and material for the life of the product. Also, subject to the limitations below, the manufacturer warrants all ceiling fan parts ("ceiling fan parts" excludes the motor and parts made in whole or in part with glass) to be free from defects in workmanship and material for a period of one year after the date of purchase by the original purchaser at retail.

All claims must be made by the original purchaser, whether such purchaser purchased the product through a store or contractor. Ceiling fan part defects must be reported within the first year from the date of purchase. Parts made in whole or in part with glass and the finishes of metal and other surfaces are not warranted.

Purchasers are responsible for all costs of removing and reinstalling the product. Any damage to any part caused by ordinary wear and tear, accident, misuse, or improper installation, is not covered by this warranty. The manufacturer assumes no responsibility whatsoever for fan installation. Any service performed by a non-licensed electrician will render the warranty invalid.

The manufacturer's sole responsibility shall be to repair or replace the motor, parts, or product within the terms stated above. The manufacturer shall not be liable for any loss or damage of any kind, including any incidental or consequential damages resulting directly or indirectly, from any breach of warranty, express or implied, or any other failure of this product. Some states do not allow the exclusion or limitation of incidental or consequential damages so this limitation may not apply to you.

If the original purchaser ceases to own the fan, this warranty is voided.


Should the purchaser encounter a problem with your fan related to defects in workmanship or materials within the warranty period associated with the defective part, the manufacturer agrees to replace the defective part without charge, or at its option, to replace the ceiling fan with a comparable or superior model.

The manufacturer's warranties are limited to the written warranties set out in this ceiling fan limited lifetime warranty. All other express and implied warranties, including, without limitation, the implied warranty of fitness for a particular purpose and the implied warranty of merchantability are disclaimed. Some states do not allow the disclaimer of implied warranties, so this disclaimer may not apply to you.


REPLACEMENT PARTS LIST

For replacement parts, call our customer service department at **800-527-1292**, 8:30 a.m. - 5 p.m., CST, Monday - Friday.


PART	DESCRIPTION	PART#
A	Downrod	5730167-A
B	Canopy	5730167-B
C	Mounting Bracket	5730167-C
F	Light Kit Fitter	5730167-F
G	Blade	5730167-G
H	Blade Arm	5730167-H




A



B



C



F



G



H