



Bathing has never been like this before. Incorporating exotic woods, acrylic and state-of-the art bathing technologies, the Fuzion™ combines everything you need to create your ideal spa experience.

WHIRLPOOL BATH FEATURES:

- Multi-speed motor
- 4 fully adjustable TheraPro® jets
- 11 directionally adjustable AccuPro™ jets
- 256 color Chromatherapy lighting system
- Water level sensor
- Sculpted armrest and contoured backrest with pillows
- All-in-one electronic control panel
- Infinity-edge drain system
- RapidHeat™ inline heater
- Undermount or choose Wenge or Teak wooden deck
- ProO₃™ Ozone Sanitation System standard

**Fuzion™ 7260
WHIRLPOOL BATH
UNDERMOUNT,
SINGLE MOTOR with
CHROMATHERAPY**

MODEL NUMBER:
EG40 (LH)
EG10 (RH)

EXTERIOR DIMENSIONS:
72" long x 60" wide x
21½" high

OF JETS/TYPE OF JETS:
4 TheraPro™
11 Back Jets & Foot Jets

OPERATING GALLONS:
129 gallons

**Fuzion™ 7260
WHIRLPOOL BATH
UNDERMOUNT,
SINGLE MOTOR with
ILLUMATHERAPY™**

MODEL NUMBER:
EG55 (LH)
EG25 (RH)

EXTERIOR DIMENSIONS:
72" long x 60" wide x
21½" high

OF JETS/TYPE OF JETS:
4 TheraPro™
11 Back Jets & Foot Jets

OPERATING GALLONS:
129 gallons





Fuzion™ 7260

WHIRLPOOL BATH UNDERMOUNT, SINGLE with CHROMATHERAPY


EG40	Fuzion™ 7260 Whirlpool UM—Single Left-hand motor
EG10	Fuzion™ 7260 Whirlpool UM—Single Right-hand motor

Fuzion™ 7260

WHIRLPOOL BATH UNDERMOUNT, SINGLE with ILLUMATHERAPY™

EG55	Fuzion™ 7260 Whirlpool UM—Single Left-hand motor
EG25	Fuzion™ 7260 Whirlpool UM—Single Right-hand motor

- Center Drain Location
- Overflow fitting comes with tub
- Accessories / Hardware:
TheraPro™ Jet Rings Kit: #D095
- Trim Kit Finishes Available:
(827) – Chrome
(898) – Brushed Chrome
(815) – Satin Nickel
(829) – Bright Brass
(805) – Platinum
(826) – Brushed Nickel
(845) – Oil Rubbed Bronze

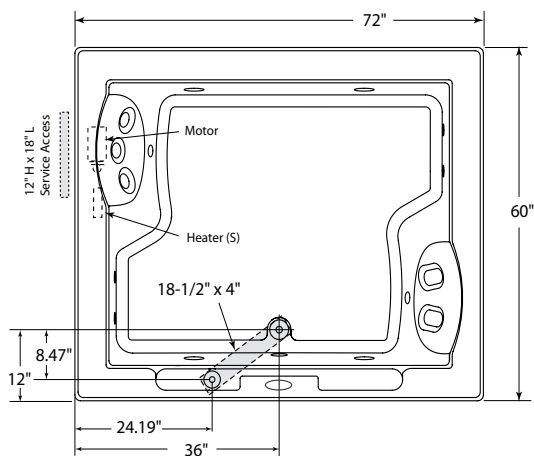

Product Shown: Fuzion™ 7260 Whirlpool Bath Undermount with Illumatherapy Single Right Hand Motor Model: EG25

* Measurements inside unit represent cutout in floor to allow for drain/overflow. Minimum Service Access dimensions given.

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

72" L x 60" W x 21 1/2" H
(1829 mm) L x (1524 mm) W x (546 mm) H

DRAIN/OVERFLOW

A: 16-3/4" (425 mm) B: 12-1/16" (306 mm)

CUTOUT

Template provided. PN: DD44000

OPTIONAL DIY (DO-IT-YOURSELF) FRAME

Drawing provided. PN: DE56000
(Drawing comes with tub. Additional copies can be requested.)

TOTAL WEIGHT

1730 lb. (785 kg) / 57.6 lb/ft² (281 kg/m²)

OPERATING GALLONAGE

129 U.S. Gal. (488 Liters)

PRODUCT WEIGHT

199 lb. (90 kg)

SKIRT MOUNTING

Not Available

ELECTRICAL SPECIFICATIONS

Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 20 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

HEATER (STANDARD)

RapidHeat™: P/N S750000

Faucet Installation Note:

Selecting a faucet for rim mounting: The combined thickness of the tub shell is 1/2" (12, 7 mm) nominal and the undermount deck should not exceed the length of the faucet tailpiece(s) including any assembly hardware.

