Here is the most recent version of the installation video



INSTALLATION GUIDE

CLOTHESLINE POST # 10736



Here you have the most recent version of the installation guide





Question? - Contact us:

First contact our friendly customer service team for assistance.

Email: info@pylex.com or call: 1-800-264-1881


Monday to Friday: 8:30am to 4:30pm UTC


Replacement for damaged or missing parts will be shipped promptly.


Rev.: 32-0821



DECK AND FENCE HARDWARE WWW.PYLEX.COM / 1 800-264-1881

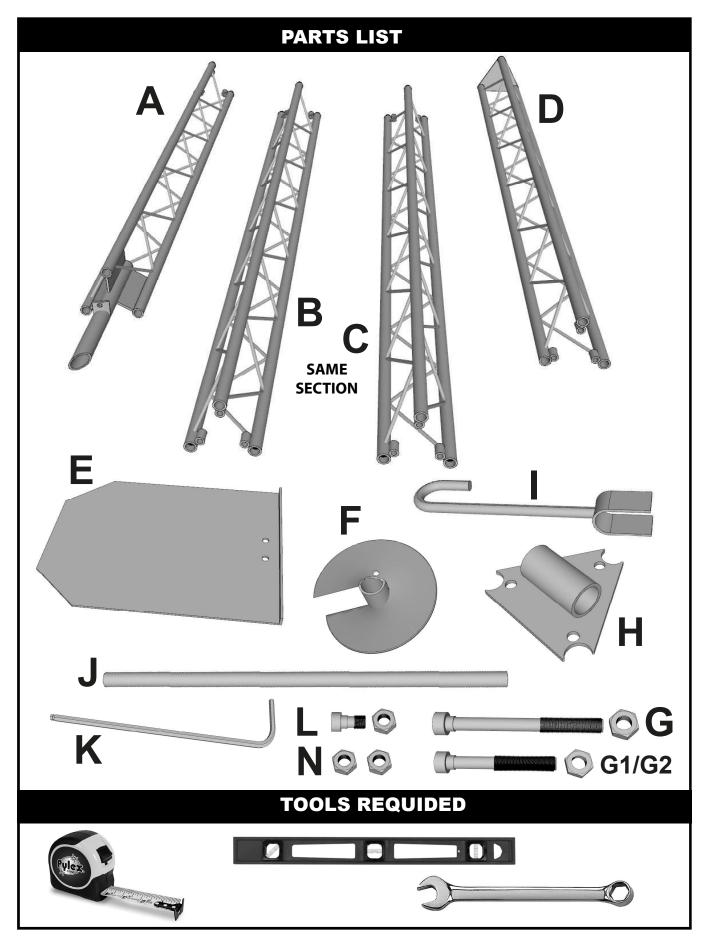


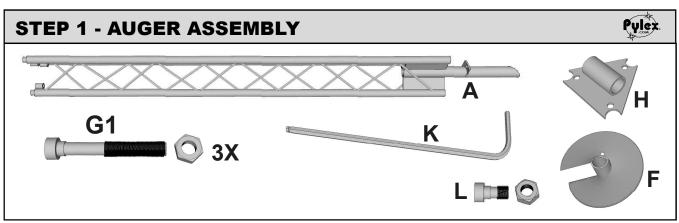

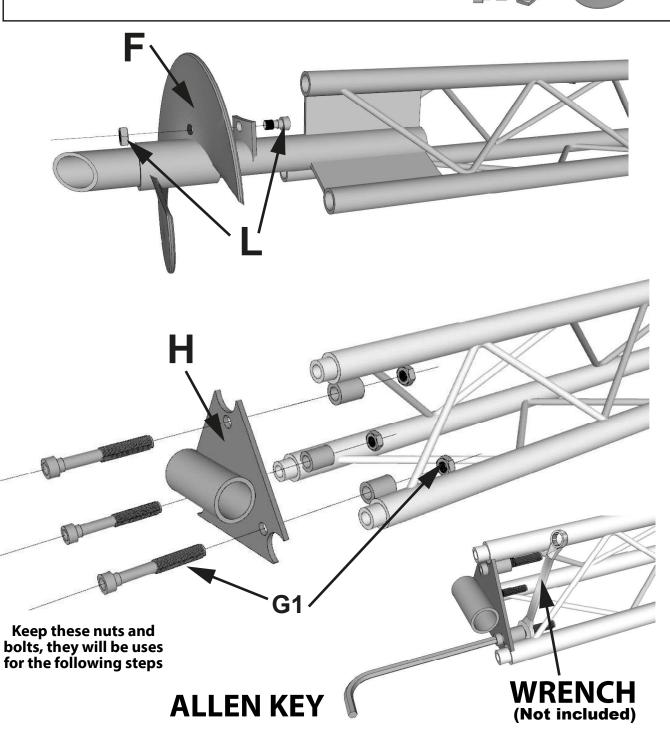


STEP 1 - AUGER ASSEMBLY (NEXT)



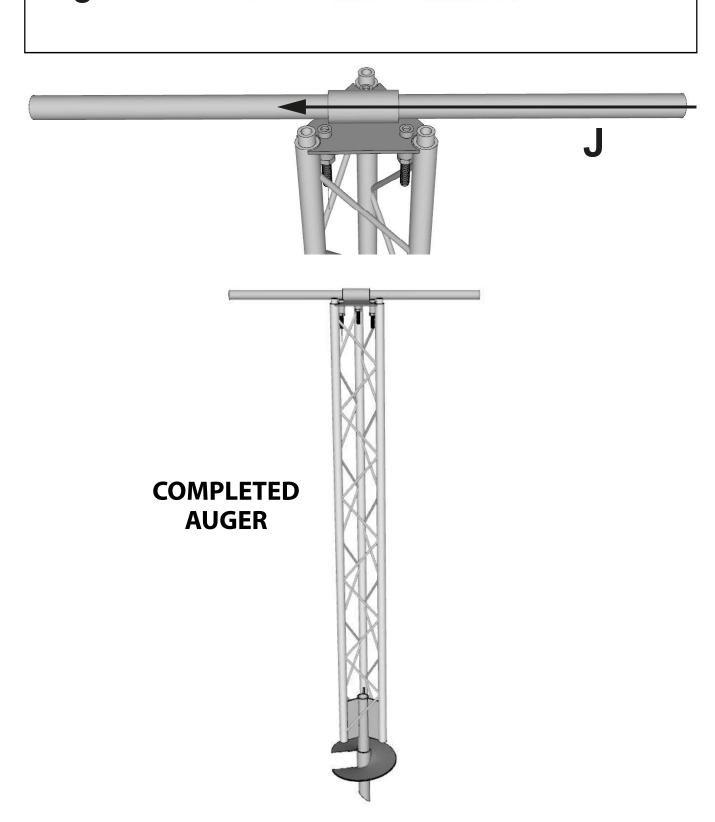




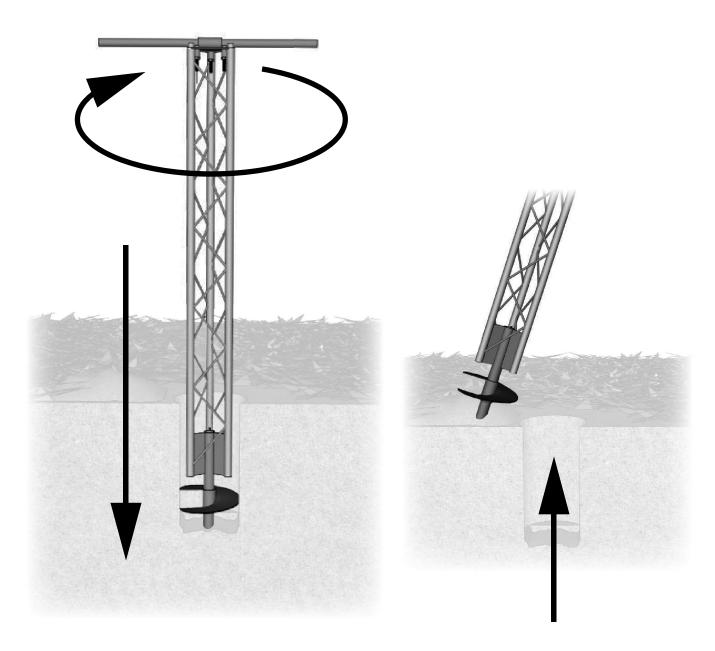



SCREW 6" AND REMOVE SOIL EACH TIME.
REPEAT UNTIL PIECE (A) IS 8" IN
ABOVE GROUND LEVEL.

STEP 2 - INSTALLING SECTION "A" (NEXT)



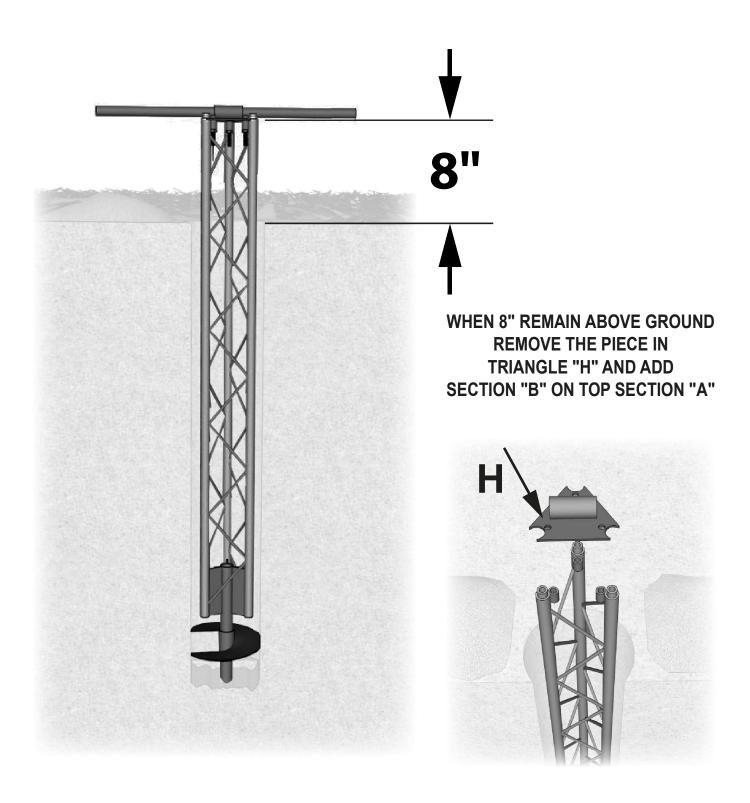


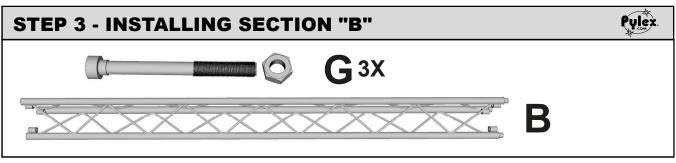

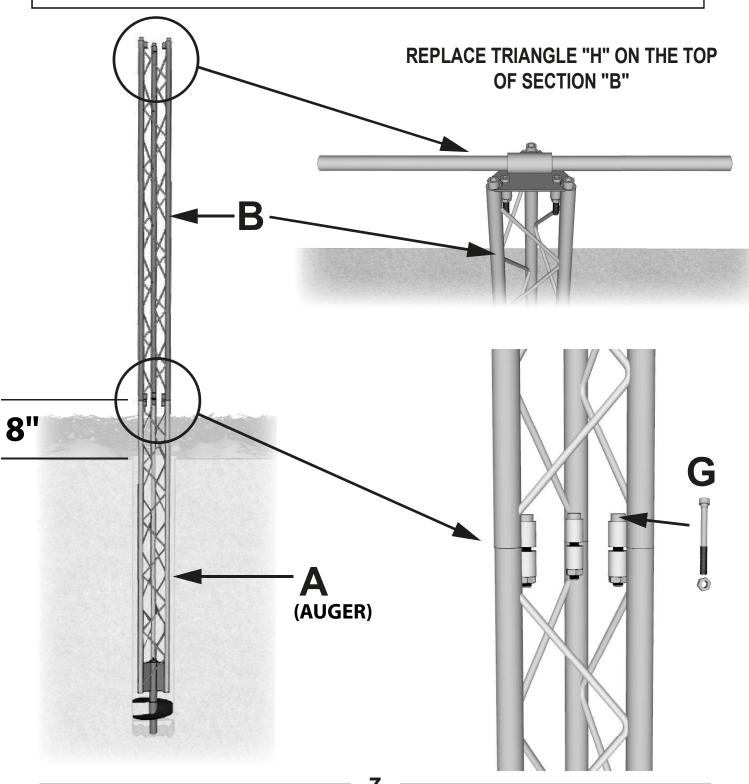



STEP 3 - INSTALLING SECTION "B" (NEXT)




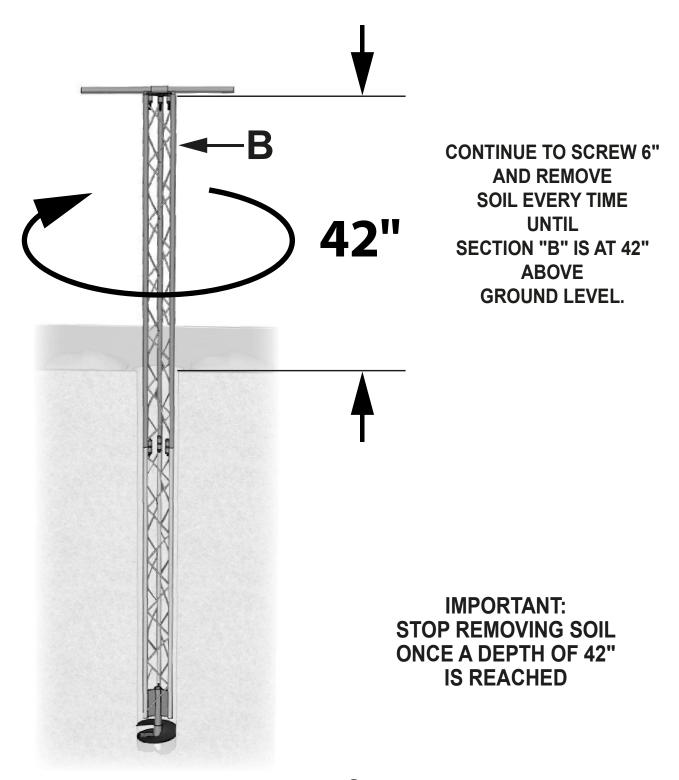


STEP 3 - INSTALLING SECTION "B" (NEXT)

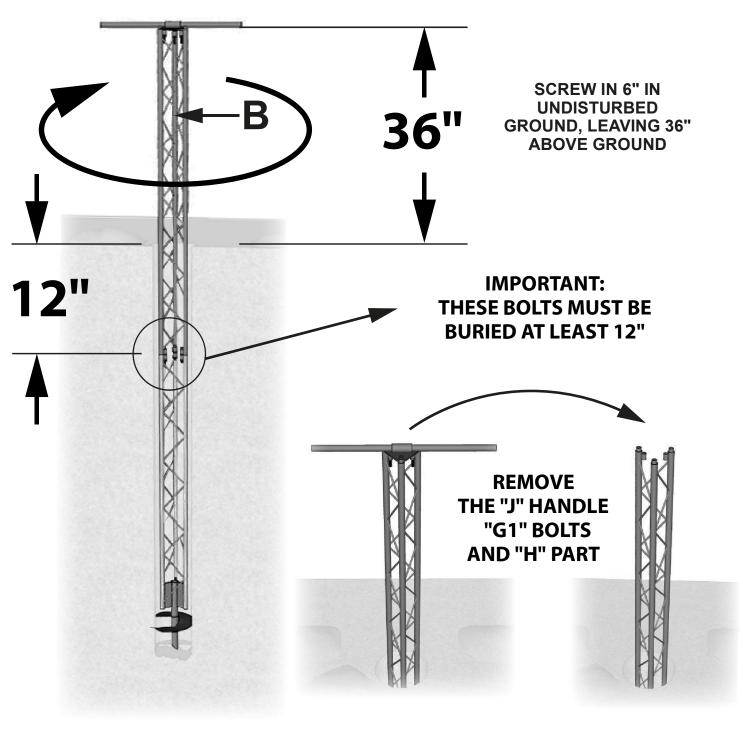

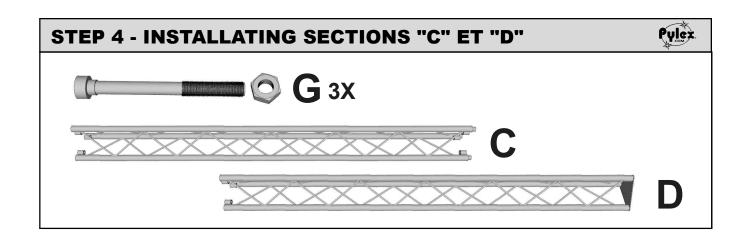

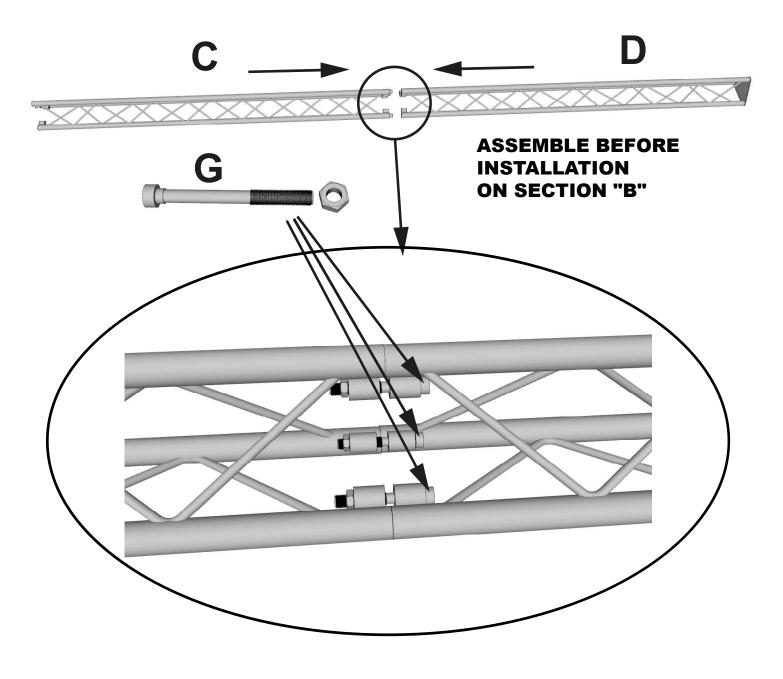




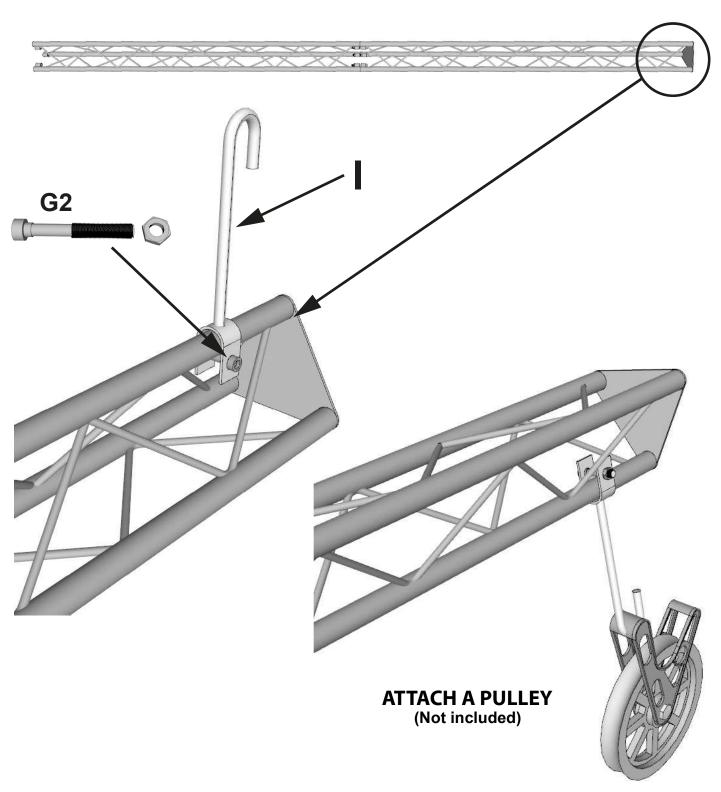


STEP 6 - INSTALLING SECTIONS "C" AND "D" ON SECTION "B"




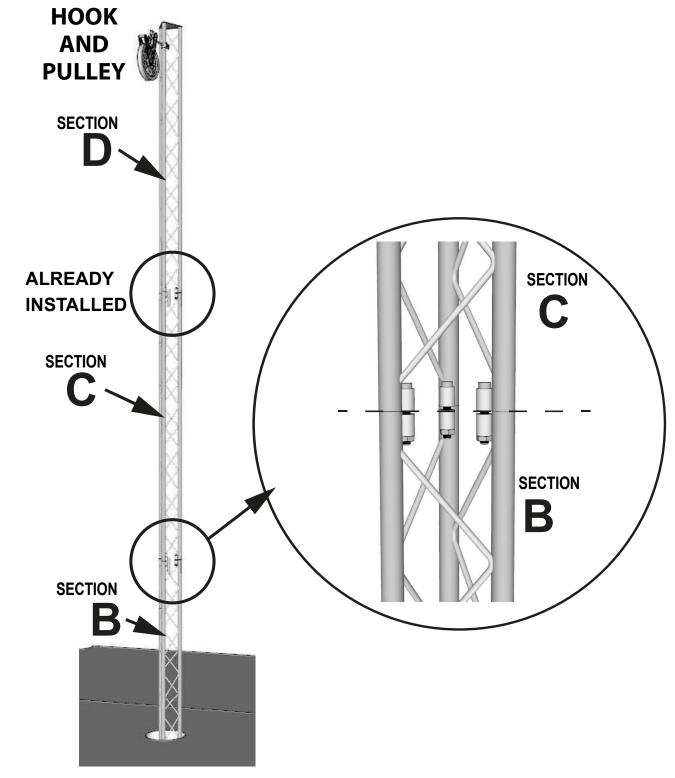



STEP 7 - POLE TILT

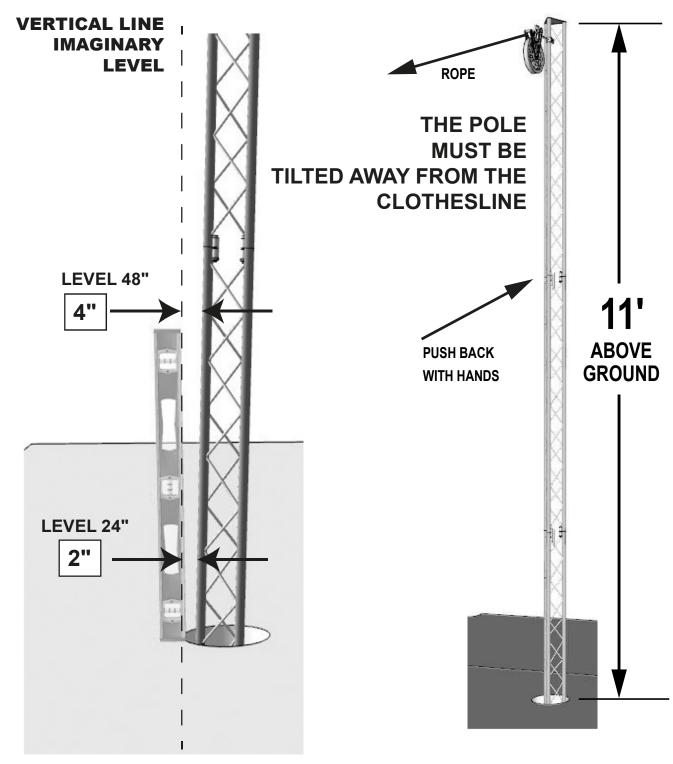


STEP 8 - SOIL COMPACTION

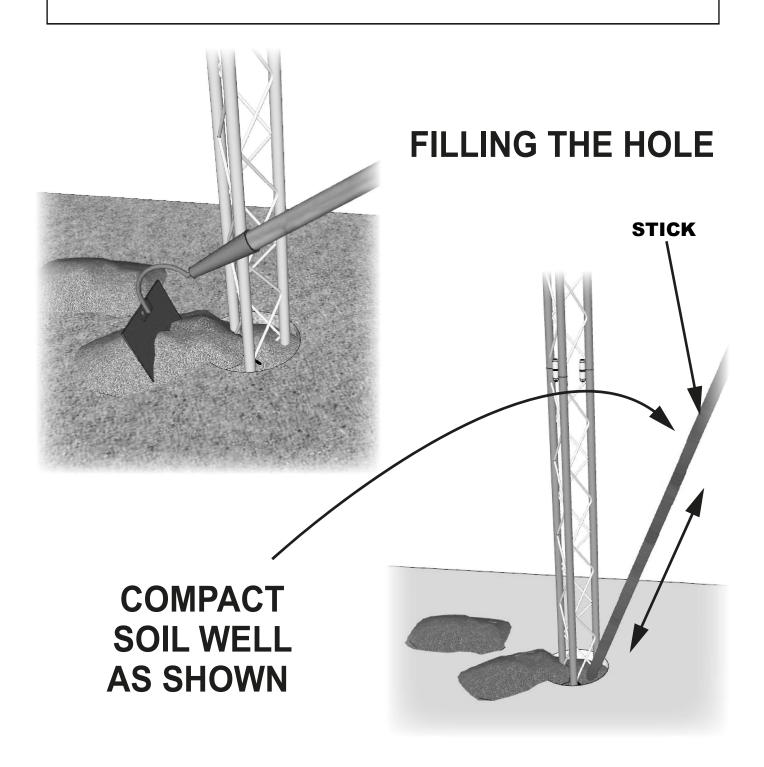

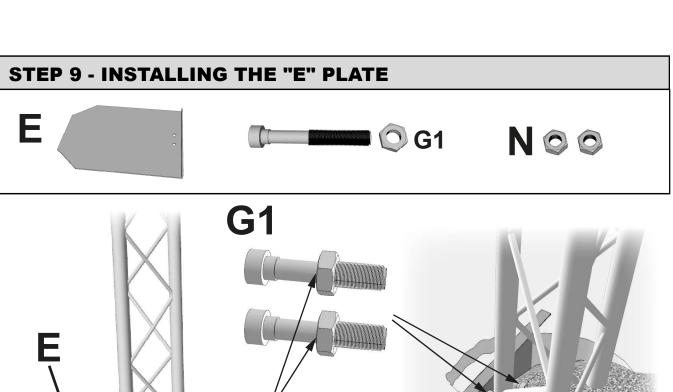

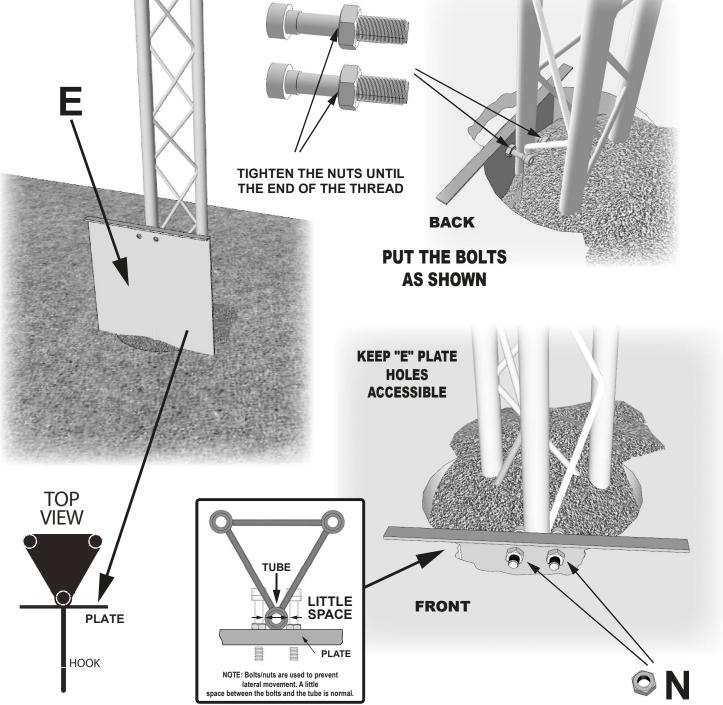

STEP 9 - INSTALLING THE "E" PLATE (SUITE)

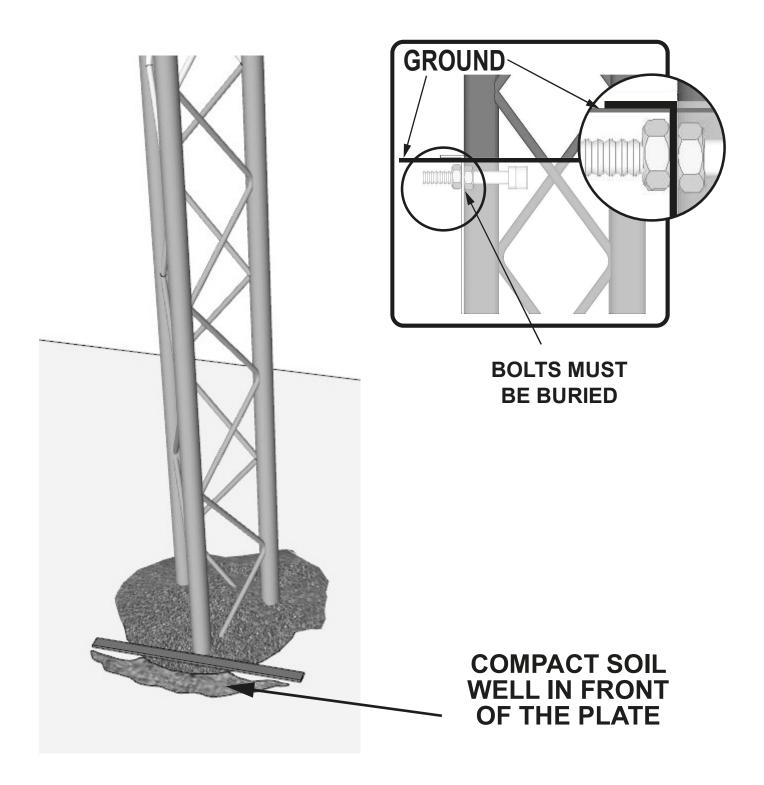

Maximum 11' above ground. Possibility of adding an extension (item #: 10738) to have a maximum of 15' above ground.





Satisfied with your Pylex product?

Please let us know by sharing pictures with us at info@pylex.com You can also write a review online about your purchase.

(By sending your image, you agree to give Pylex the right to it in its marketing activities).

Thank you!

YOU LIKED OUR PRODUCT?

Visit our website: www.pylex.com to see all our products or scan this QR code to have access to our catalog!



Pylex Guarantee Certificate











