

ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0118 / T0121

WARNING: Turn off the main power at circuit breaker before installing fixture.
AVERTISSEMENT: Coupez la source d'alimentation principale au panneau central de disjoncteurs avant d'installer le luminaire.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.


Hardware Package (included):



IMPORTANT:

The sensor has an excellent photocell function to enable the light to turn on at dusk and off at dawn automatically.


Fig. 1

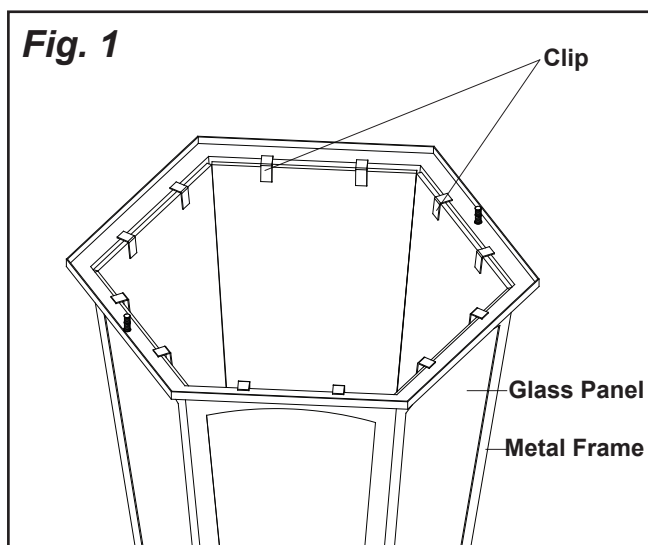

Installation Steps

Turn off the power at fuse or circuit box.



1. Take a glass panel and gently slide it into the metal frame in place, secure it by pressing two clips on top side of the metal frame and two clips on the bottom of the metal frame. Repeat with the other glass panels. (See Figure 1)
2. Pull out the source wires from the post. Make wire connections using wire nuts as follows:
 - Connect the hot wire (usually black insulation) from the fixture to the black wire from the post
 - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the post
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the grounding wire from the post.Carefully put the wires back into the post.

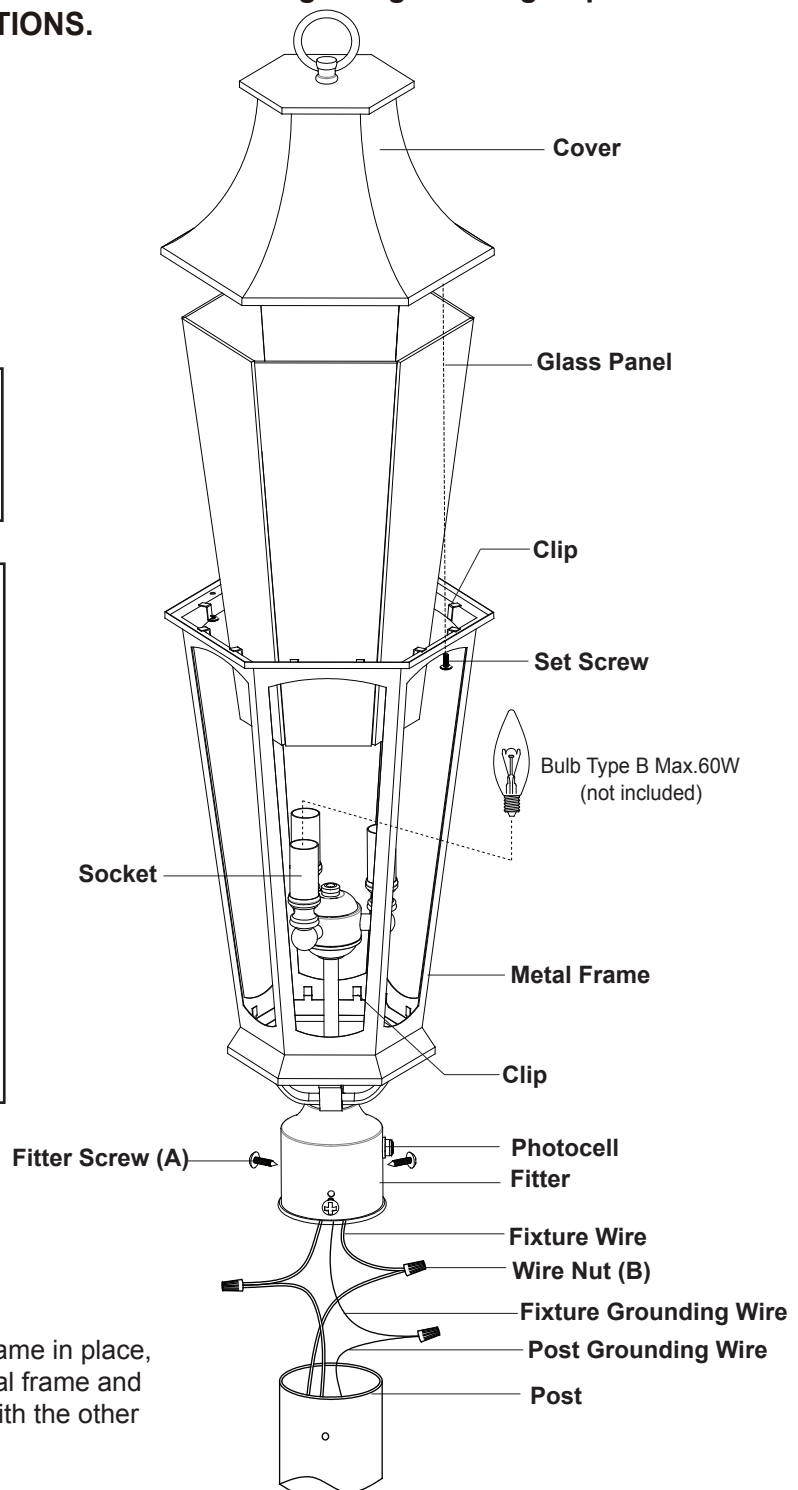

3. Place the fitter on the post, then secure it with the fitter screws.
4. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
5. Attach the cover onto the metal frame, then secure it with set screw.

Turn on the power at fuse or circuit box.


Operation the Unit Without Photocell

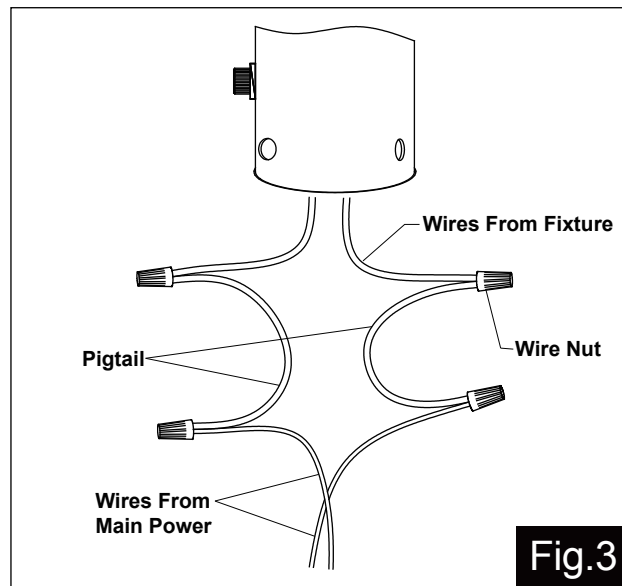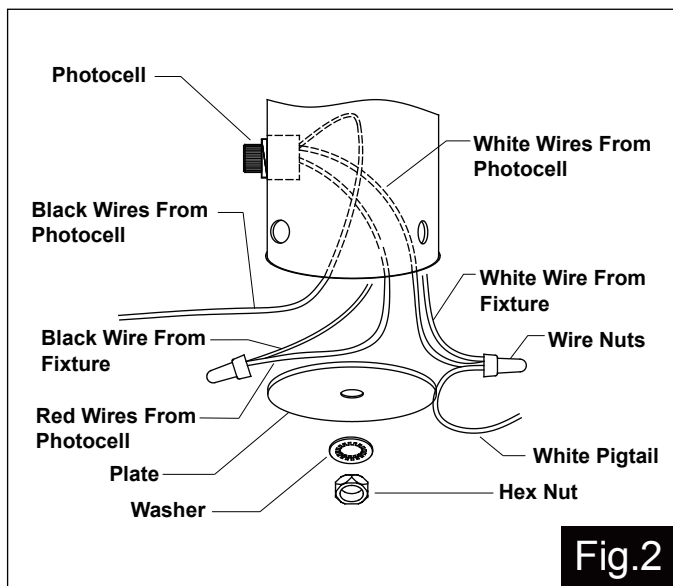

1. Turn off the power at fuse or circuit box before starting installation.
 2. Unscrew the hex nut and washer to remove the plate from the fixture.
 2. Loosen the wire nuts connected with the wires from photocell. (See Fig.2)
- Note: Do not move the photocell to prevent water from seeping into the post.**
3. Take a white pigtail and black pigtail and make wire connections using wire nuts: (See Fig.3)
 - a. The black wire from the fixture to one end of the black pigtail.
 - b. The white wire from the fixture to one end of the white pigtail.
 - c. The other end of the black pigtail to the black wire from the power source.
 - d. The other end of the white pigtail to the white wire from the power source.
- Put all wires back into the post.

The following parts are available for re-order if damaged or missing.


Spare Parts List:

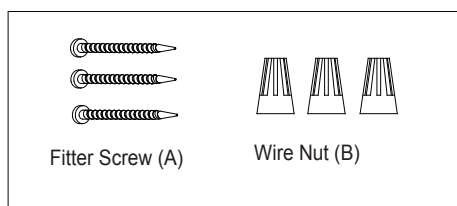

Mounting Hardware
 5155MM (1 SET) For T0118
 5158MM (1 SET) For T0121



Glass Panel
 9639S(6PCS) For T0118
 9640C(6PCS) For T0121

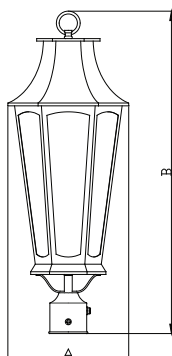

A: 10-1/8"

B: 27-1/4"