

INSTALLATION INSTRUCTIONS

Item#2174-66A/84 (New. 02/02/2021)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker and remove the old fixture included the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Determine the desired hanging height and thread rods (L1, L2 and L3) to the nipple (M) of the fixture body.
4. Loosen the hex nut (F) on the canopy (D) by wrench (not provided), take apart lock washer (G), washer (H), metal washer (I) and swivel (K).
5. Pass the wires carefully through each rod (L1, L2 and F3), swivel (K) and canopy (D) as you assemble.
6. Secure swivel (K) onto rod (L1), then align canopy (D), followed by metal washer (I), washer (H) and lock washer (G) onto the swivel (K), and secure with hex nut (F).
7. Attach the mounting strap (A) to the outlet box using outlet box screws (C) (Size: #8-32N*L0.5"). The length of the nipple (B) into the mounting strap (A) may be adjusted if necessary. The side of mounting strap (A) with "GND" marked must face out.

CONNECTING THE WIRES (Fig.2)

8. At this point, connect the electrical wires as shown in Fig.2, making sure that all wire connectors (W) are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap (A) using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

FINISHING THE INSTALLATION (Fig.1)

9. Raise the canopy (D) all the way to the ceiling. The nipple (B) should protrude through the canopy (D) and secure with finial (J).
10. Unscrew the socket ring (P) from the fixture socket (N). Position the glass shade (O) onto the fixture and secure in place with the socket ring (P).
11. Install (5) five medium base (E26) bulbs (Q) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Your installation is now complete. Return power and test the fixture.


Fig.1

Set# A-012-46

-Mounting Strap

-Ground Screw

-Mounting Screw*2

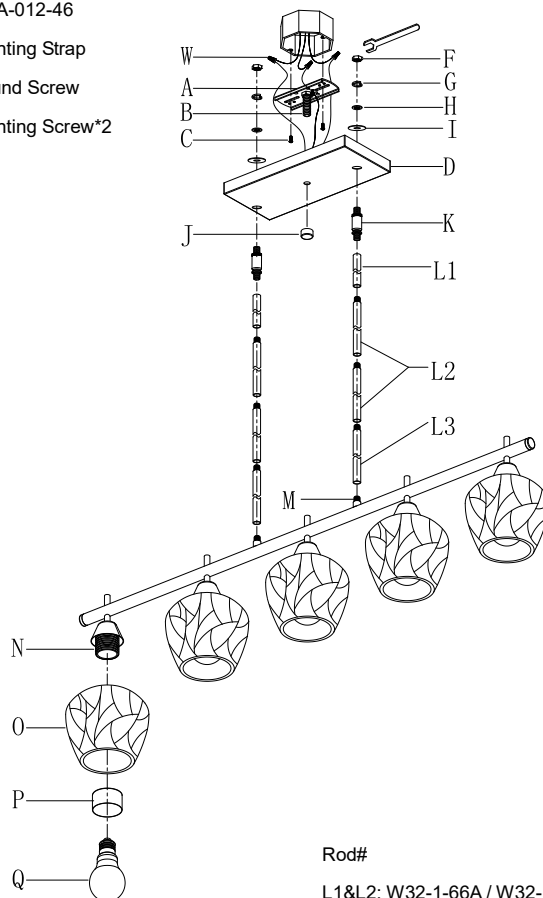


Rod#

L1&L2: W32-1-66A / W32-1-84

L3: W32-H-66A / W32-H-84

Fig.2

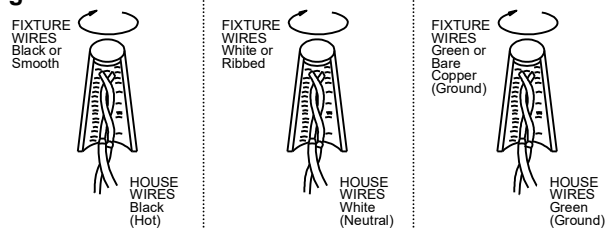

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.