



EASY CONNECT® INSTALLATION INSTRUCTIONS

EW-2
12/12

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) • 1-800-567-2513 (French)

Monday through Friday 8:00 AM to 5:00 PM E.S.T.




"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"

"READ ALL INSTRUCTIONS"


**"IMPORTANT SAFETY
INSTRUCTIONS"**
"SAVE THESE INSTRUCTIONS"

INSTALL EASY CONNECT MOUNTING BRACKET:

STEP 1




Attach easy connect mounting bracket to electrical box with electrical box screws (not included).



Additional support may be required for fixtures longer than 20". Position the fixture and add wood screws (one on each side) for the wooden studs or plastic wall anchor and wood screws for dry wall.


CONNECT HOUSE WIRES

STEP 2 - Option 1

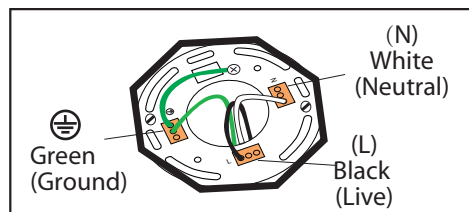

Connect (push) electrical wires from electric box (house wiring) into correct inserts. Black (Live), White (Neutral), Green (Ground)


Option 2 - MULTIPLE ELECTRICAL BOX WIRES

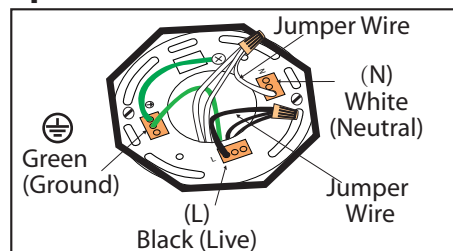

For multiple black (live) & white (neutral) wires joined in the electrical box (house wiring), attach a single "black" and "white" Jumper Wire before connecting. Strip 7mm from a 6" Jumper Wires (AWG 12-24) supplied. Then connect (push) wires into correct inserts.


CONNECT LIGHT FIXTURE

STEP 3

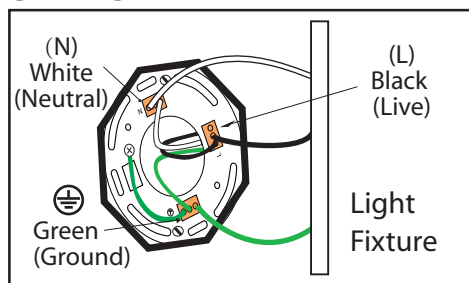

Connect (push) electrical wires from fixture into correct inserts. Black (live), White (neutral), Green (ground)


STEP 4



Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).


Note: If required, assemble body and spread the arms of the fixture out evenly.

STEP 5 - Optional for some models (Note: Refer to the style of assembly that matches the style of your fixture.)



STYLE#1 - Remove spinner nut from socket. Position glass on the fixture and secure with spinner nut. Install proper bulb type and wattage.

Note: Glass may face up or down.



STYLE#2 - Install proper bulb type and wattage. Install the glass to the fixture by tightening the 2 thumb screws.