




Item Number: A03971

WARNING (To reduce the risk of fire, electric shock, or personal injury):






1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at a later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the **"OFF"** position. B) Place the wall switch in the **"OFF"** position.
4. Mounting surface should be clean, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

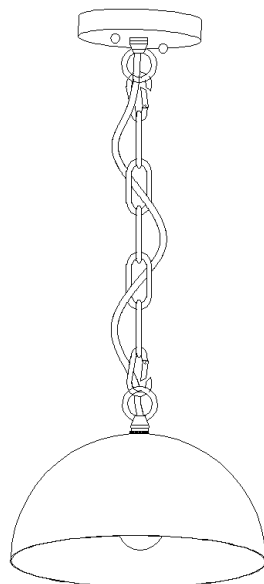IMAGE FOR FINISHED PRODUCT:



TOOLS REQUIRED (NOT INCLUDED):


Before making assembly and installation please prepare the needed tools as below picture

				
Ladder	Phillips head, flat blade screwdriver	Electrical tape	Pliers	Wire cutter/Stripper



PARTS TYPE & QTY INCLUDING:

- (C) Mounting plate (1)
- (D) Green ground screw (1)
- (E) Canopy (1)
- (F) Loop (2)
- (G) Quick link (2)
- (H) Ball nut (2)
- (I) Chain (1)
- (J) Socket (1)
- (K) Lampshade (1)

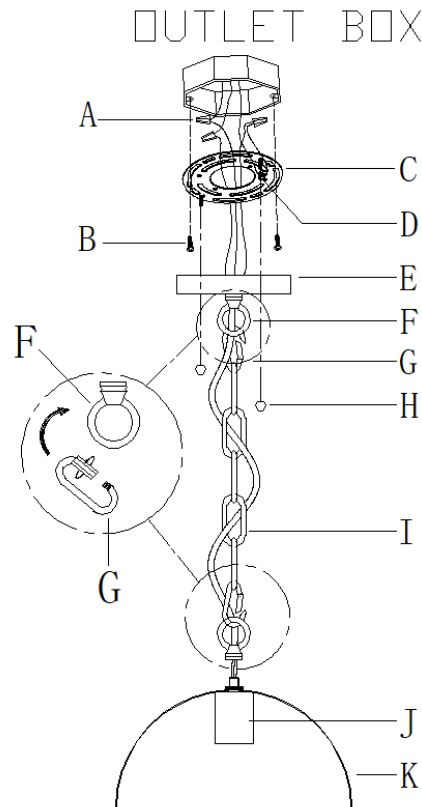


ACCESSORIES & QTY ENCLOSED:

- (A) Plastic Wire Connectors (3)
- (B) Mounting screw (2)

ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.
2. Turn off power
 Before you start to make installation, NEVER attempt any work without shutting off the electricity until the work is done. A) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B) Place the wall switch in the "OFF" position.
3. Make pre-installation

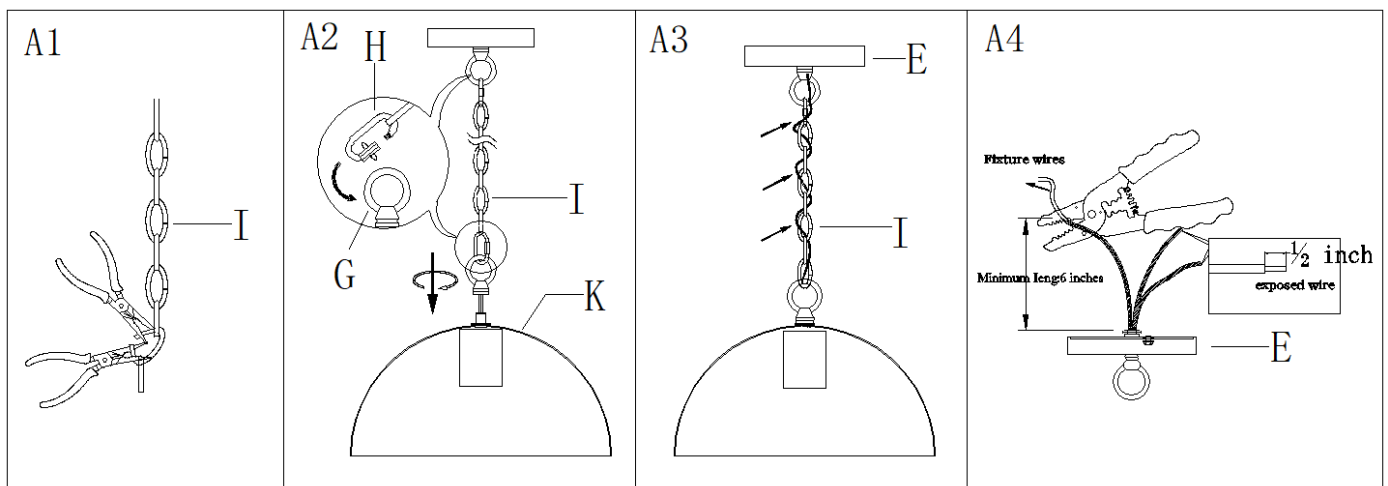

Step A1: By measuring, determine the correct number of links needed for a proper hanging height. Using the chain pliers, disconnect and discard the unwanted part.

Step A2: Twist the loop (G) onto the top of the lampshade (K).


Attach a quick link (H) to loop (G) on the top of lampshade (K) and to connect the end of chain (I).

Do the same to the other end.

Step A3: Gently weave wires through chain (I) and loop (G) to the top of canopy (E).

Step A4: If needed, shorten the length of fixture wires. At this point, please note that the wire length should be available for the following installation that the wire length above the top of nipple is at least 6".

4. Make installation

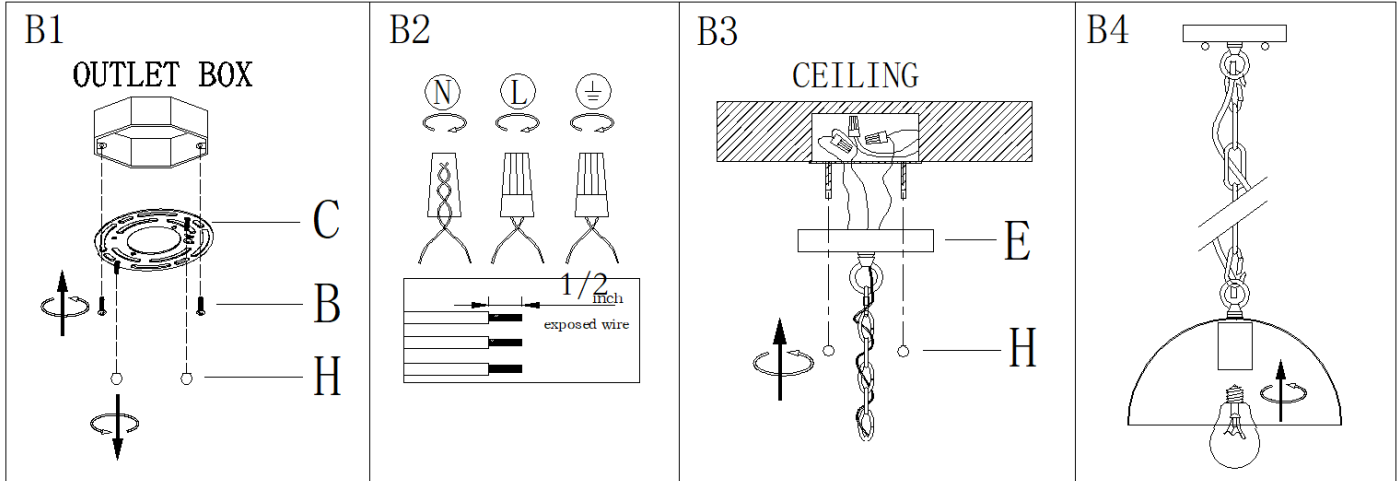


Step B1: Attach the mounting plate (C) to outlet box with mounting screws (B), then unscrew the ball nut (H) from mounting plate (C).

Step B2: Make wire connections

Connect wires as below wires connecting shown. **PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**


Connect ground wires according to the below chart

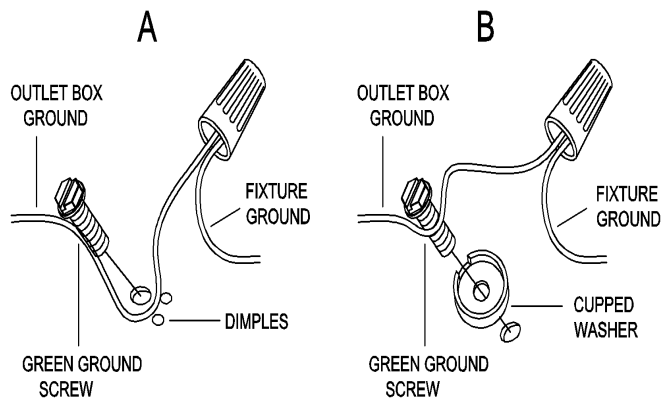

Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear,Brown,Gold or Black without tracer	Clear,Brown,Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



Twist wires together with plastic wire connector until tightly joined, and wrap each connector with approved electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

Step B3: Raise canopy (E) to ceiling and secure canopy (E) in place by tightening ball nuts (H) onto the pre-assembled mounting screws.

Note: The canopy (E) should be snug against the ceiling and the ball nuts (H). If not, remove the canopy (E) and then adjust the length of the nipples on the mounting plate assembly (C) by unscrewing the pre-assembled hex nuts and then screwing the pre-assembled mounting screws in or out of the mounting plate (C) until the secure length is achieved. Tighten the pre-assembled hex nuts and back to step B3.

Step B4: Install bulb (Not included) (Please do not exceed the maximum wattage recommended on the socket.)

5. Check everything is installed properly then you could turn on the light. Enjoy!

CLEANING

To clean, wipe the fixture with a soft cloth. Clean glass with a mild cleaner (such as mild soap). Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.