
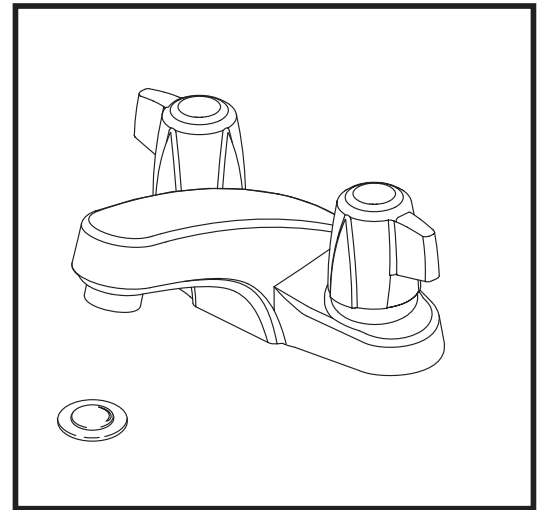


# PEERLESS®

P246LF  
P246LF-▲-M

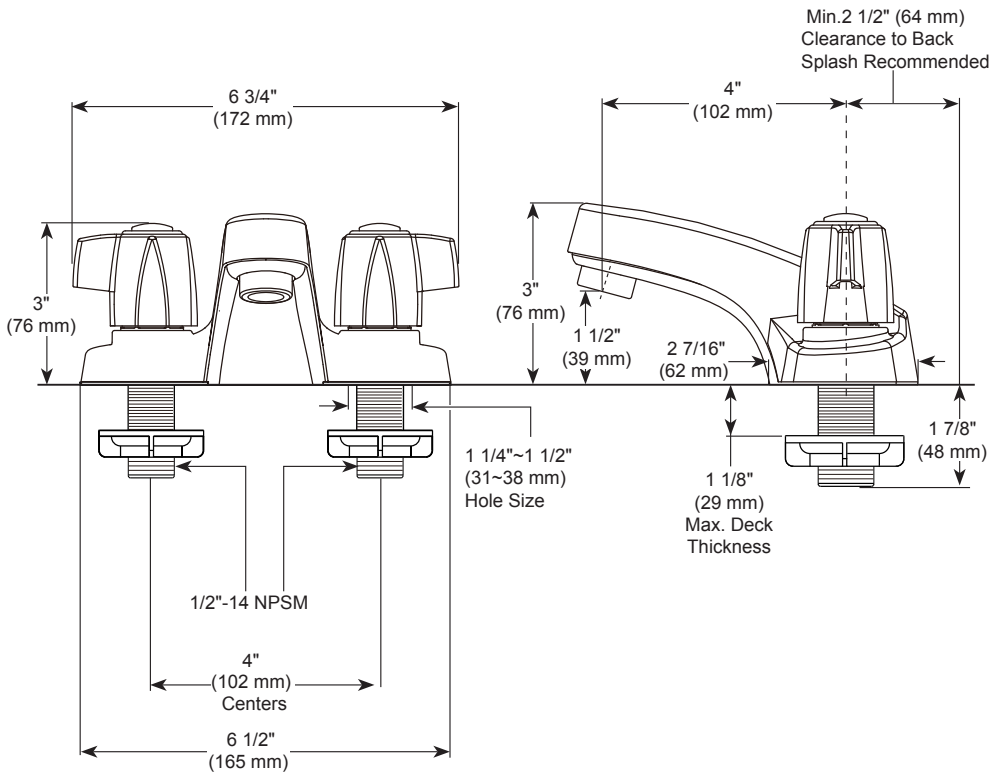


## BATHROOM FAUCET:

- Two Handle Centerset
- 4-Inch 3-Hole Sink Applications


## STANDARD SPECIFICATIONS:

- Max flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
- Three-hole mount
- The fully replaceable, washerless valve design rotates from the full-off position to the full-on position
- The valve stems on the hot and cold stems are interchangeable
- 1/2"-14 NPSM threaded male inlet shanks
- Models have plastic push pop-up
- Models with suffix "M" have metal push pop-up

## RP101631▲ Plastic Push Pop-Up

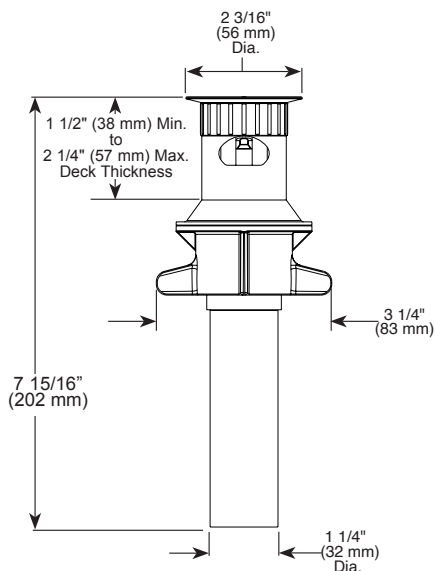

## RP103420▲ Metal Push Pop-Up

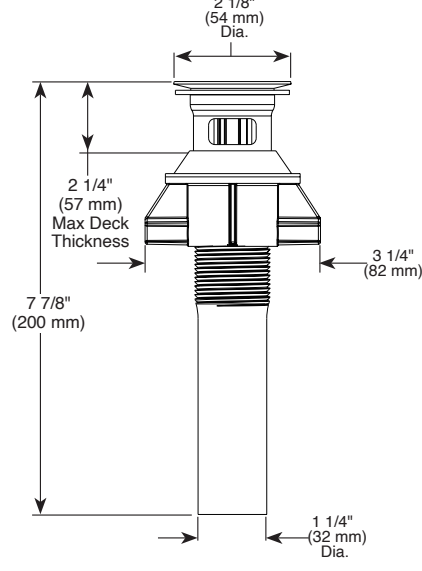

## WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.peerlessfaucet.com](http://www.peerlessfaucet.com) for the complete details of our limited warranty.



## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- EPA WaterSense®

ICC/ANSI A117.1

▲ Designate proper finish suffix

PSP-L-P246LF Rev. J