

Specifications

Features

- 1.8 GPM Flow Rate
- 60" Nylon Hose
- 2 Function Pull-Down Sprayer
- AccuDock™ Spray Head Docking
- Swivel Spout
- Mounting Hardware Included
- Soap Dispenser Included
- Fixed Hubs
- Pfaster Connect™
- High Arc Spout
- Quick Install Tool
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



Dimensions

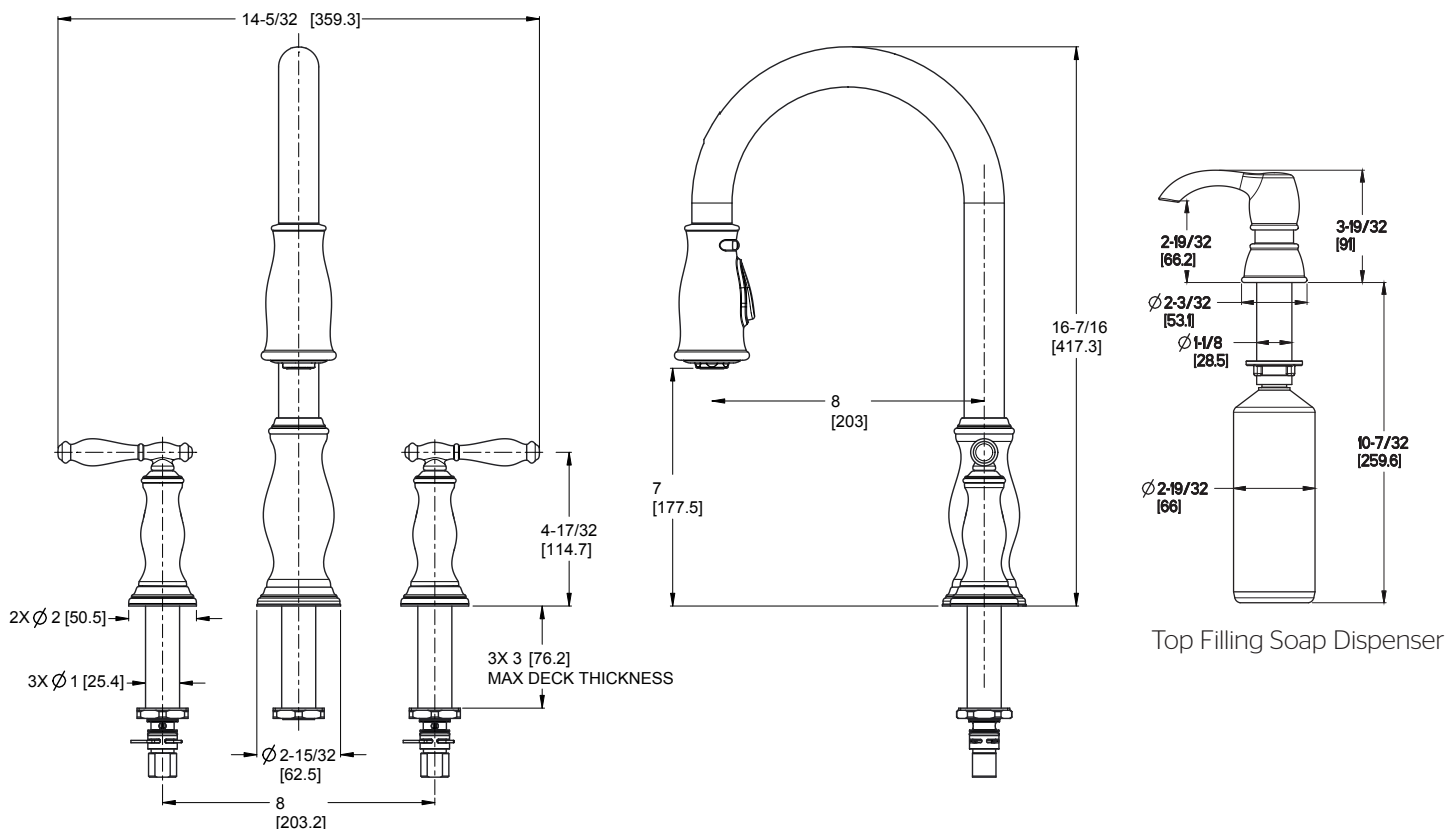

$\varnothing 1-3/8$ Min to $\varnothing 1-1/2$ Max. Deck Hole Openings