


K4 32 071

High Profile Pull Down Dual Spray

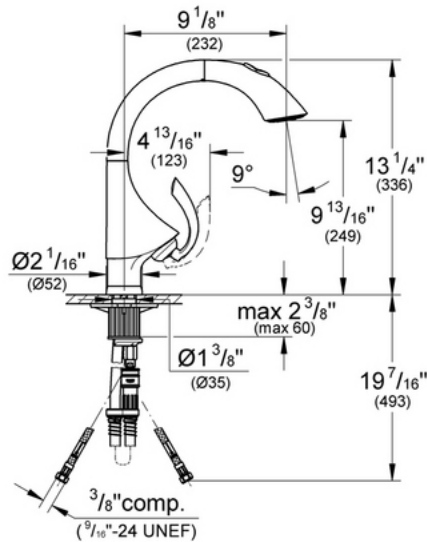

Description

GROHE RealSteel® Stainless Steel Construction (SD0 and KD0 versions)

Solid brass body (000 version)

Ceramic cartridge

Dual spray control -- switches back and forth between regular flow and spray

SpeedClean anti-lime system

Single lever handle

Variable handle positioning (left, right, or center and all points in between)

9 1/8" spout reach

Flow Rate

2.2 gpm at 60 psi, 2.5 gpm at 80 psi
(9.5 lpm)

Code Compliance

- * ASME/ANSI A112.18.1M
- * ANSI/NSF Standard 61
- * ADA Compliant

Finish Options

32 071 000 Starlight® Chrome

32 071 SDO Stainless Steel

32 071 KDO Stainless Steel/Black

32 071 DCO SuperSteel