


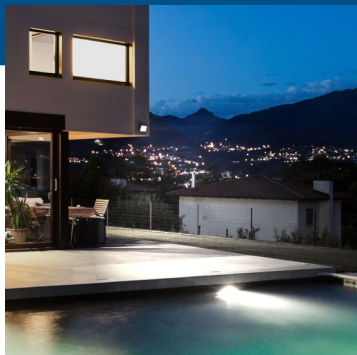


HyperFLBX-50 - 391XX1056

FLOOD LIGHT WITH BRACKET **HYPERIKON®** LED OUTDOOR

SPECIFICATIONS

Model Name	SKU	Wattage	Lumens	Efficacy	Kelvin
HyperFLB30-50	391031056	30W	2,400 Lm	80 Lm/W	5000K
HyperFLB50-50	391051056	50W	4,000 Lm	80 Lm/W	5000K
HyperFLB100-50	391101056	100W	8,000 Lm	80 Lm/W	5000K
HyperFLB200-50	391201056	200W	16,000 Lm	80 Lm/W	5000K
HyperFLB300-50	391301056	300W	24,000 Lm	80 Lm/W	5000K

MODEL DESIGN

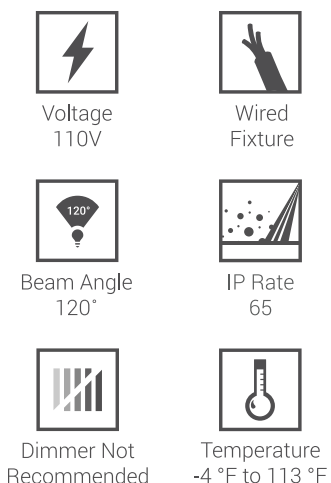

- Suitable for wet locations.
- 45,000+ hours of lifespan, more than 41.1 years based on 3Hrs/day average.
- Sealed Die-casting Profile for Outdoor Applications.
- Polycarbonate Optical Lens with UV Stabilizers.



WARNINGS AND CAUTIONS

- Risk of electric shock - turn power off before inspection, installation or removal.
- Avoid direct eye exposure to the light source.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.



☎ (888) 846-4973
 ✉ info@hyperikon.com
 📍 707 Broadway Suite 800
 San Diego, CA 92101
 🌐 www.hyperikon.com

