


Catalog Number: MC0816B1200RTH

Features and Ratings

- Ringless Meter Cover
- 1 Phase, 3 Wire, 600V AC
- Painted G90 Steel
- 200A Breaker Factory Installed
- Meter Socket Rating: 200A Continuous
- 4 Jaw Meter Socket, Ringless Type Meter Cover
- 22,000 AIC Max. Rated (See Wiring Diagram for Details)
- Overhead or Underground Service Entrance
- RX Type Hubs on Top End Wall
- HC Type Hubs on Bottom End Wall
- Feed Thru Lugs Included

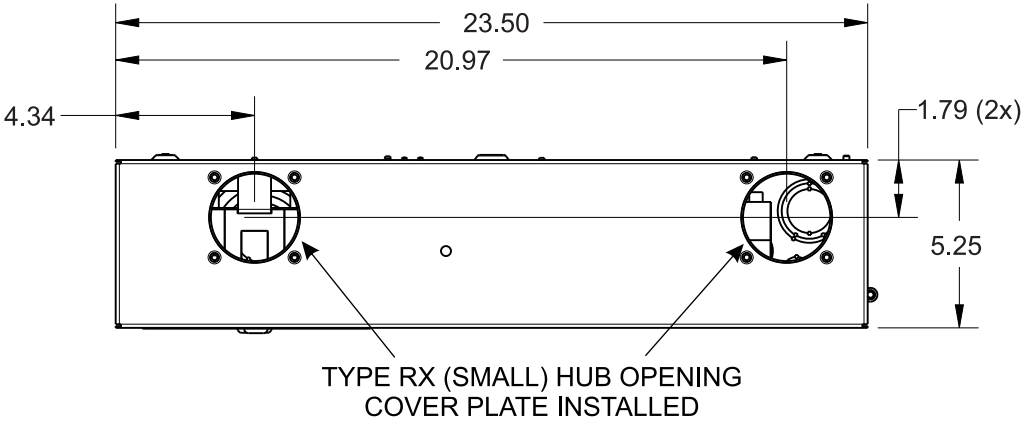


Accessories

TYPE RX HUBS






Trade size (in)	Catalog number
1 1/4"	EC38597 or H38597-2
1 1/2"	EC38598 or H38598-2
2"	EC38599 or H38599-2
2 1/2"	EC38600 or H38600-2

Schematic,
Torques & Wire Sizes

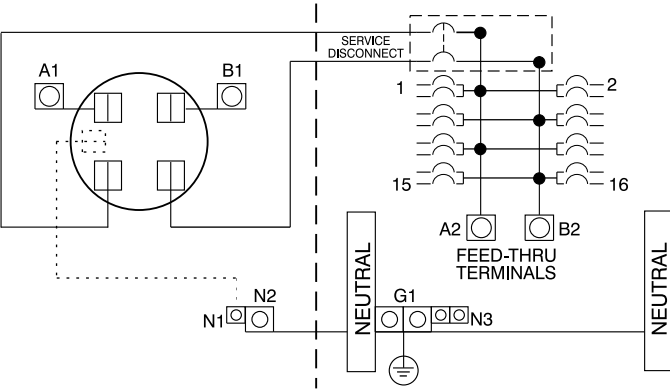

Terminal	Wire Size	Torque
A1, B1	350kcmil - #6	275 lb-in
N1	#2 - #3 #4 - #6 #8 #10 - #14	50 lb-in 45 lb-in 40 lb-in 35 lb-in
N2	250kcmil - #6	275 lb-in
A2, B2, G1	250kcmil - #4	275 lb-in
N3	1/0 - #14	120 lb-in
Branch Breaker Terminals	See Markings on Breaker	
Neutral Bar	#10 - #14 CU	20 lb-in
	#10 - #12 AL	20 lb-in
	#8	25 lb-in
	#6 - #4	35 lb-in
Ground Conductors Only	(2) or (3) #14 AWG	20 lb-in
	(2) #12-#10 AWG	20 lb-in

MAIN BREAKER TERMINALS
See markings on breaker for torque
requirements and conductor rating.

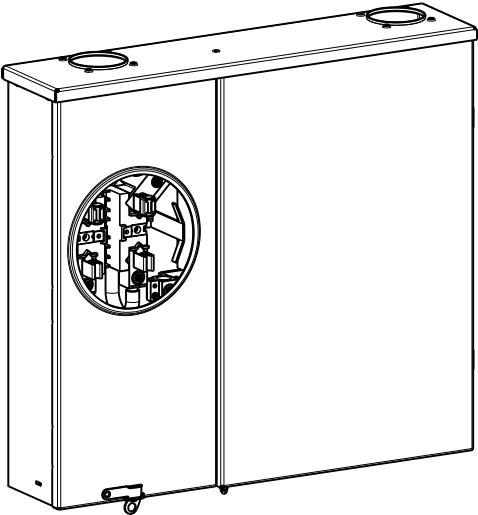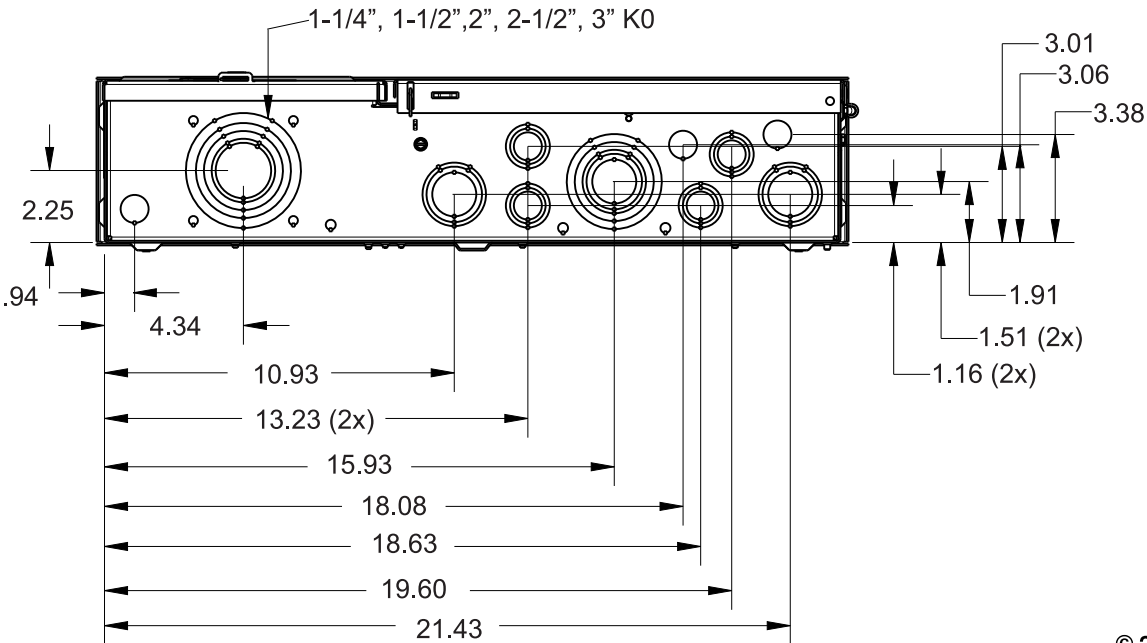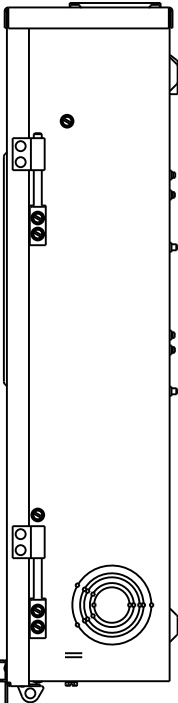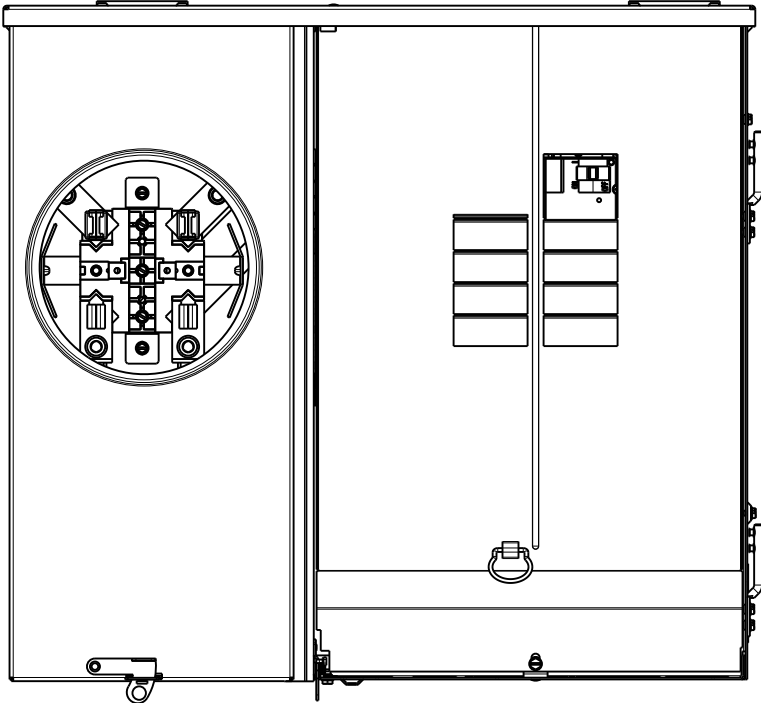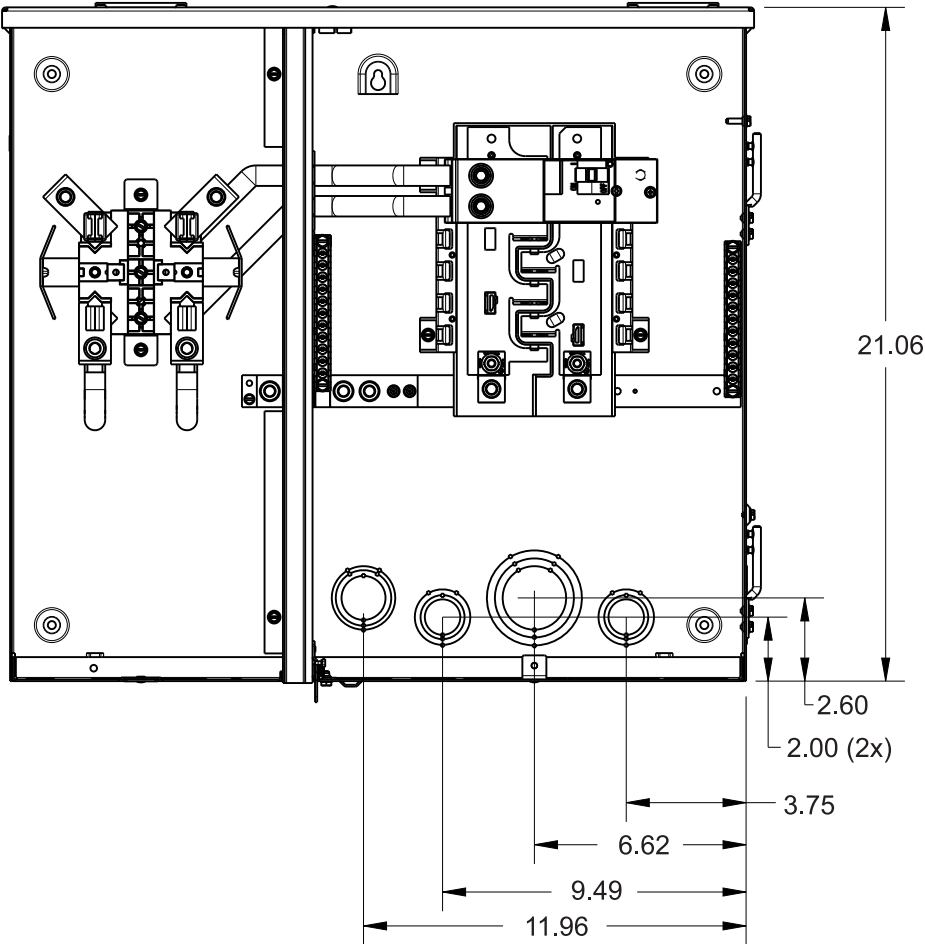

Siemens Industry, Inc.
Building Technologies Division

Meter/Breaker Combination

Description:
200A Cont, OH/UG, Ringless,
Painted G90 Steel